

VM-80A


1:8 Balanced Stereo Audio Distribution Amplifier



The Kramer **VM-80A** is a high performance distribution amplifier for balanced stereo audio signals. It can be configured as two 1:4 DAs.

FEATURES

- **Dual Mode** - Configure as either a 1:8 or (2) 1:4 DAs.
- **S/N Ratio** - 100dB (1V).
- **Grouped Audio Level (Gain) Controls.**
- **Desktop Size** - Compact size. Two units can be rack mounted side-by-side in a 1U rack space with the optional RK-80 adapter.

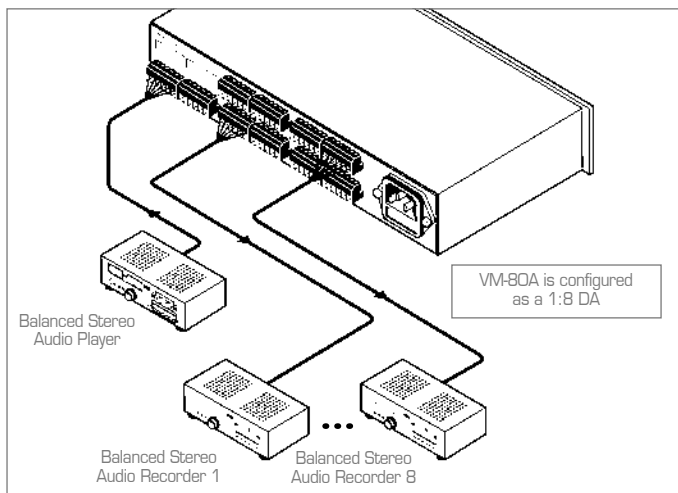

TECHNICAL SPECIFICATIONS

INPUTS:	2 balanced audio stereo + 4dBm, 100k Ω on terminal block connectors.
OUTPUTS:	2 x 4 balanced audio stereo, + 4dBm, 50 Ω on terminal block connectors.
MAX. AUDIO OUTPUT:	20Vpp.
AUDIO BANDWIDTH (-3dB):	20kHz.
S/N RATIO:	100dB/1V.
CROSSTALK:	-60dB.
COUPLING:	AC.
THD + NOISE:	0.02%.
POWER SOURCE:	230VAC, 50/60Hz (115VAC U.S.A.) 6.7VA.
DIMENSIONS:	22cm x 18cm x 4.5cm (8.7" x 7" x 1.8", W, D, H, half 19").
WEIGHT:	1.2kg. (2.7lbs.) approx.
ACCESSORIES:	Detachable AC power cord.
OPTIONS:	RK-80 rack kit.