
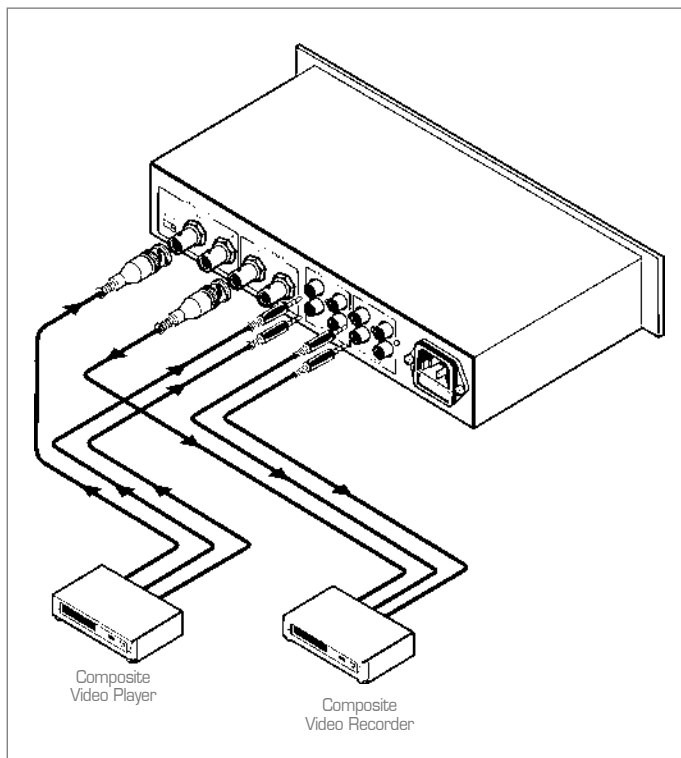


VM-9S**1:2 Composite Video & Stereo Audio Distribution Amplifier & Line Amplifier**

The Kramer **VM-9S** is a high performance distribution and line amplifier for composite video and unbalanced audio signals. It provides controls to compensate for signal losses inherent in long cable runs.

FEATURES

- **Bandwidth** - 84MHz (-3dB).
- **Audio Level Control.**
- **Level (Gain) and EQ (Peaking) Controls.**
- **Looping Inputs.**
- **Selectable Input Signal Termination.**
- **Desktop Size** - Compact size. Can be rack mounted in a 1U rack space with the optional RK-MEDN adapter.

**TECHNICAL SPECIFICATIONS**

INPUTS:	1 video, looping, 1Vpp/75Ω, on BNC connectors with termination switch. 1 audio stereo, 1Vpp/50kΩ, on RCA connectors.
OUTPUTS:	2 video 1Vpp/75Ω on BNC connectors. 2 audio stereo, 1Vpp/100Ω on RCA connectors.
MAX. VIDEO OUTPUT:	2Vpp.
VIDEO BANDWIDTH (-3dB):	84MHz.
AUDIO BANDWIDTH (-3dB):	25kHz.
DIFF. GAIN:	0.2%.
DIFF. PHASE:	0.5 Deg.
K-FACTOR:	< 0.05%.
S/N RATIO:	74dB.
CONTROL:	0/+ 8dB (audio and video).
COUPLING:	DC (Video), AC (Audio).
THD (1kHz):	0.03%.
POWER SOURCE:	230VAC, 50/60Hz (115VAC U.S.A.), 3.5VA.
DIMENSIONS:	24.5cm x 18cm x 4.5cm (9.6" x 7" x 1.7", W, D, H).
WEIGHT:	1.2kg. (2.6lbs.) approx.
ACCESSORIES:	Power cord.
OPTIONS:	RK-MEDN 19" rack adapter.