

VP-1201

12x1 Computer Graphics Video Switcher & Scanner


NEW

The **VP-1201** is a high performance switcher/scanner for computer graphics video signals. When configured as a scanner, it will cycle through selected inputs at pre-determined intervals.

Compatible with HDTV component video signals when used with a breakout cable such as the Kramer C-GM/3RVF.

FEATURES

- **Bandwidth** - 400MHz (-3dB).
- **Dual Mode** - Configure as a 12x1 switcher or scanner.
- **Active Input Indication™ reporting** - Each input button on the front panel automatically lights up when the unit detects a video signal on that input. When an input is selected to be switched, the button changes to a different color to indicate that it is the active input.
- **Scanner Mode Dwell Time** - Adjustable from 1-16 seconds.
- **Expandable** - Cascade up to eight units for an input expansion configuration.
- **Control** - Front panel, RS-232, RS-485 and Ethernet.
- **Standard 19" Rack Mount Size** - 1U.

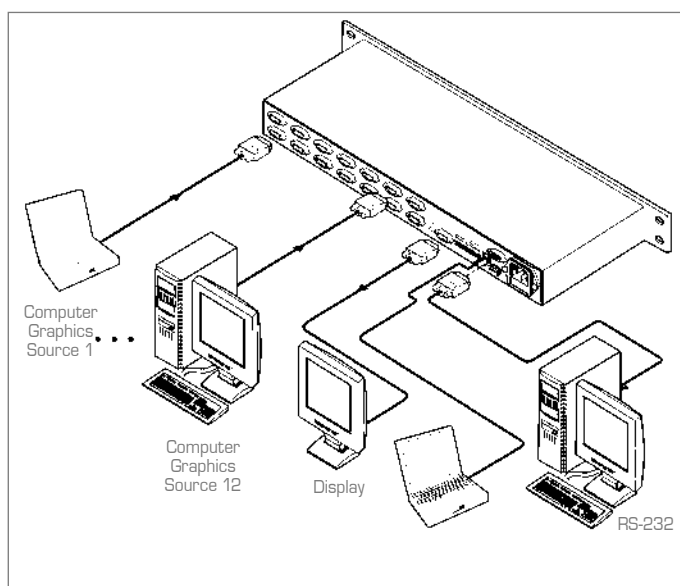

TECHNICAL SPECIFICATIONS

INPUTS:	12 XGA inputs on HD15F connectors.
OUTPUT:	1 XGA output on an HD15F connector.
MAX. OUTPUT LEVEL:	1.9Vpp.
BANDWIDTH (-3dB):	400MHz.
DIFF. GAIN:	0.03%.
DIFF. PHASE:	0.05 Deg.
K-FACTOR:	< 0.05%.
S/N RATIO:	76dB.
CROSSTALK (all hostile):	-61dB @ 5MHz.
CONTROLS:	-1,3dB to +6dB, RGB level control.
COUPLING:	DC.
POWER SOURCE:	230 VAC, 50/60 Hz (115 VAC, USA).
DIMENSIONS:	19 inch (W), 7 inch (D), 1U (H) rack mountable.
WEIGHT:	5.5kg. (12.2lbs.) approx.
ACCESSORIES:	Power cord, Null modem adapter, Windows®-based control software, Windows®-based Configuration Manager XPort software and Com Port Redirector.

