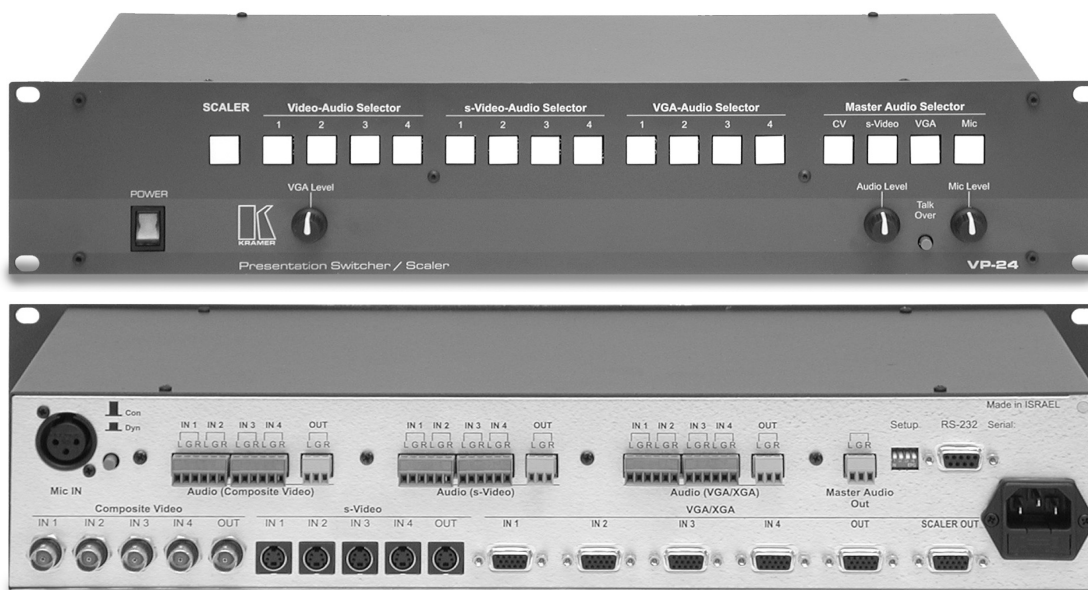


VP-24

Presentation Switcher / Scaler

GROUP 2

The Kramer **VP-24** is a high quality Presentation Switcher / Scaler designed for a wide variety of presentation and multimedia applications. In one high performance unit, it combines the functions of a 4x1 switcher for composite video and audio, a 4x1 switcher for s-Video and audio, and a 4x1 switcher for VGA-type signals with audio. The **VP-24** is designed to be a one-box solution for installations that would otherwise require several separate products. Each section can be controlled independently from the others. When the machine is switched to "SCALER" mode, any selected input is outputted via a HD-15F connector, scaling the composite and YC inputs to VGA/SVGA. The graphics input is routed "as-is" to the scaled output. The **VP-24** is controlled by front panel buttons or by RS-232 serial commands transmitted by a touch screen system, personal computer, or other serial controller. The **VP-24** has an additional audio switching section which routes one of the pre-selected audio inputs from the other switching sections to a separate output. This switching section can insert an additional microphone channel - either by switching, mixing or talk-over. The machine allows changing the master audio output levels by RS-232 commands. Front-panel controls allow adjustment of VGA/XGA output level, and EQ., Master audio output level and Microphone level.

**TECHNICAL SPECIFICATIONS**

| | |
|--------------------------|--|
| INPUTS: | 4 VGA/XGA on HD-15F connectors, 4 s-Video, 1Vpp (Y), 0.3Vpp (C)/75Ω on 4p connectors, 4 composite video 1Vpp/75Ω on BNC connectors. Each input is accompanied by the appropriate audio stereo channels: + 4dBm/50 kΩ on detachable terminal block connectors. Mic: 3 mV/10 kΩ condenser/dynamic on an XLR connector. |
| OUTPUTS: | 1 x VGA/XGA, 1 s-Video - 1Vpp (Y), 0.3Vpp (C)/75Ω on a 4p connector, 1 composite video 1Vpp/75Ω on a BNC connector, 1 x VGA (NTSC) or SVGA (PAL) scaled output on an HD-15F connector. Each output is accompanied by the appropriate audio stereo channel: + 4dBm/150Ω, 1 Master audio + 4dBm/150Ω. |
| MAX OUTPUT: | Video: 2.1 Vpp; audio: 27 Vpp. |
| BANDWIDTH (-3dB): | XGA/VGA: 315MHz; s-Video (Y): 260MHz; composite video: 470MHz; audio: 40kHz. |
| DIFF. GAIN: | 0.07 % all channels. |
| DIFF. PHASE: | 0.05 Deg. all channels. |
| S/N RATIO: | Video: 75dB all channels; audio: 75dB/1Vpp, all channels. |
| CONTROL: | 17 selector switches; VGA/XGA level: 4dB; audio: 6dB, Mic: up to 49dB. |
| DIMENSIONS: | 19-inch(W) x 7-inch(D) x 2U(H), rack mountable. |
| POWER SOURCE: | 230 VAC, 50/60 Hz, (115 VAC, U.S.A.) 16 VA. |
| WEIGHT: | 3.8kg. (8.4lbs.) approx. |
| ACCESSORIES: | Power Cord, PC control software. |

TYPICAL APPLICATIONS

- Presentation and conference room systems.
- Production studios.
- Rental and staging.

**2.56**

► PRODUCTS CATALOG 2004/2 ► KRAMER: SIMPLE CREATIVE TECHNOLOGY ► WWW.KRAMERELECTRONICS.COM