

VP-3xl/VP-4xl/VP-5xl 1:3, 1:4, & 1:5 Computer Graphics Video Distribution Amplifiers




Compatible with HDTV component video signals when used with a breakout cable such as the Kramer C-GM/3RVF.



The **VP-3xl**, **VP-4xl**, & **VP-5xl** are high performance distribution amplifiers for computer graphics video signals with resolutions ranging from VGA through UXGA and higher. It takes one input, provides correct buffering and isolation, and distributes the signal to three, four, or five identical outputs.

FEATURES

- **High Bandwidth** - 375MHz (-3dB).
- **HDTV Compatible.**
- **EQ (Peaking) Control.**
- **ID Bit Control.**
- **Desktop Size** - Compact size. Two units can be rack mounted side-by-side in a 1U rack space with the optional RK-80 adapter.

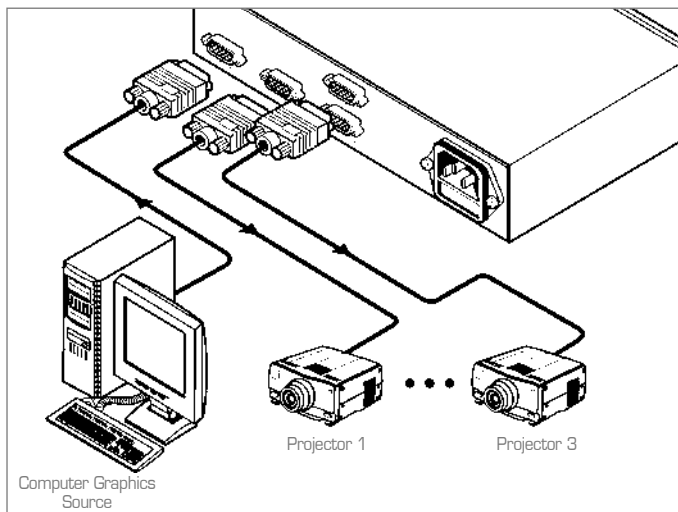

TECHNICAL SPECIFICATIONS

INPUTS:	1 VGA/UXGA input on an HD15F connector.
OUTPUTS:	3 (VP-3xl), 4 (VP-4xl), 5 (VP-5xl) VGA/UXGA on HD15F connectors.
MAX. OUTPUT LEVEL:	1.9Vpp.
BANDWIDTH (-3dB):	375MHz.
DIFF. GAIN:	0.12%.
DIFF. PHASE:	0.28 Deg.
K-FACTOR:	< 0.05%.
S/N RATIO:	73.7dB.
CONTROLS:	Cable EQ. control.
COUPLING:	DC.
POWER SOURCE:	100-240VAC, 50/60Hz, 4.3VA.
DIMENSIONS:	22cm x 18cm x 4.5cm (8.7" x 7" x 1.7"), W, D, H, (half 19", 1U).
WEIGHT:	1.2kg. (2.64lbs.) approx.
ACCESSORIES:	Power cable.
OPTIONS:	19" rack adapter RK-80 (holds 2 units).

