


## VP-43xl RS-232/RS-485/RS-422 Format Converter



The **VP-43xl** is a bi-directional format converter between RS-232, RS-485, and RS-422 protocols. Input data in any format is converted to the other two formats.

### FEATURES

- **Ports** - RS-232, RS-485, and RS-422.
- **Format Conversion** - Any control message is converted to the other 2 formats at the same baud rate.
- **RS-485** - Up to 32 units can be connected via RS-485.
- **Baud Rates** - 1200, 2400, 9600, 19200 and 38400.
- **Compact Size** - Part of the Kramer TOOLS™ family of compact, high quality and cost effective solutions.

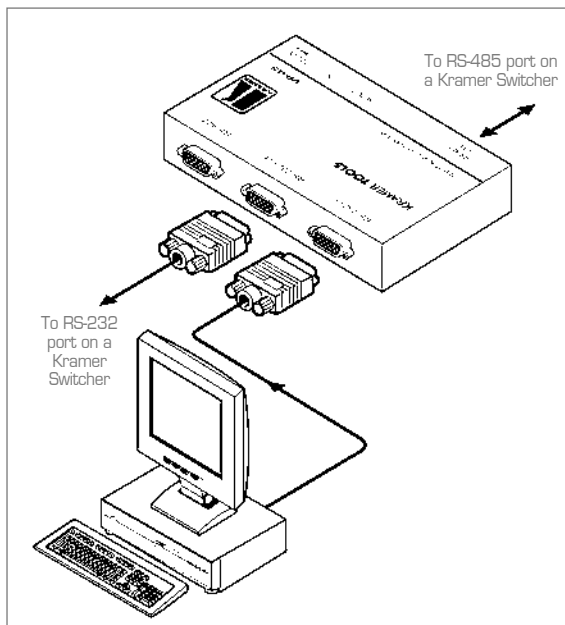

### TECHNICAL SPECIFICATIONS

INPUTS/OUTPUTS:	RS-232 on DB-9F, RS-232 out DB-9M compliant to TIA/EIA-232-F. RS-485 on 3 wires detachable terminal block compliant to TIA/EIA-485-A. RS-422 on DB-9F compliant to TIA/EIA-422-B.
BAUD RATES:	1200, 2400, 9600, 19200, 38400.
FORMAT:	1 Start bit, 8 data bits, 1 Stop bit.
DISPLAY:	Power ON LED.
POWER SOURCE:	12VDC, 80mA.
DIMENSIONS:	12 x 7.5 x 2.5 (cm) 4.7" x 2.95" x 0.98" (W, D, H).
WEIGHT:	0.3kg. (0.67lbs.) approx.
OPTIONS:	RK-T1, RK-T3, 19" rack adapters.

