

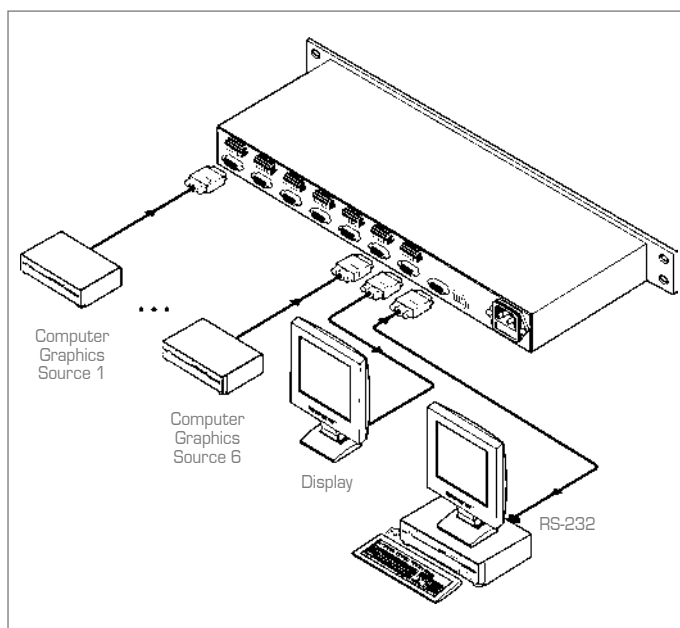
VP-61xi/VP-61N**6x1 Computer Graphics Video Switchers with & without Balanced Stereo Audio**

The **VP-61xi** is a high performance switcher for computer graphics video signals, with resolutions ranging from VGA through UXGA and higher, and balanced stereo audio signals. The **VP-61N** has all the same features of the **VP-61xi** but without audio.

Compatible with HDTV component video signals when used with a breakout cable such as the Kramer C-GM/3RVF.

**FEATURES**

- **High Bandwidth** - 400MHz (-3dB).
- **HDTV Compatible.**
- **VP-61N** - Same as VP-61xi but without audio.
- **Control** - Front panel & RS-232 (K-Router™ Windows®-based software is included).
- **Standard 19" Rack Mount Size** - 1U.

**TECHNICAL SPECIFICATIONS**

INPUTS:	6 analog red, green, blue signals - 0.7Vpp/75Ω, H & V syncs, TTL level on HD15F connectors. 6 balanced audio stereo signals, + 4dBm typical, 24dBm max. on detachable terminal blocks.
OUTPUT:	One analog red, green, blue signal - 0.7Vpp/75Ω, H & V syncs, TTL level on an HD15F connector. One balanced audio stereo signal, + 4dBm typical, 24dBm max. on a detachable terminal block.
BANDWIDTH (-3dB):	400MHz. (video) 100kHz. (audio).
SWITCH TIME:	Less than 5ms.
SWITCH CONTROL:	Six electronic illuminated touch switches with electronic interlock. RS-232 via an additional DB-9 connector on rear panel.
COUPLING:	Direct.
POWER SOURCE:	230VAC, 50/60Hz, (115VAC, U.S.A.) 3VA.
DIMENSIONS:	19 inch (W), 7 inch (D) 1U (H) rack mountable.
WEIGHT:	2.7kg. (6lbs.) approx.
ACCESSORIES:	Power cord, Windows®-based control software.

