

## VS-2481


### 8x1:2 Balanced Audio Switcher



The **VS-2481** is a high performance switcher for balanced mono audio signals on XLR connectors. It switches any one of eight signals to two identical outputs.

#### FEATURES

- **S/N Ratio** - 91dB.
- **Control** - Front panel & RS-232 (included K-Router™ Windows® - based software is included).
- **Expandable** - Cascade multiple units.
- **Standard 19" Rack Mount Size** - 1U.

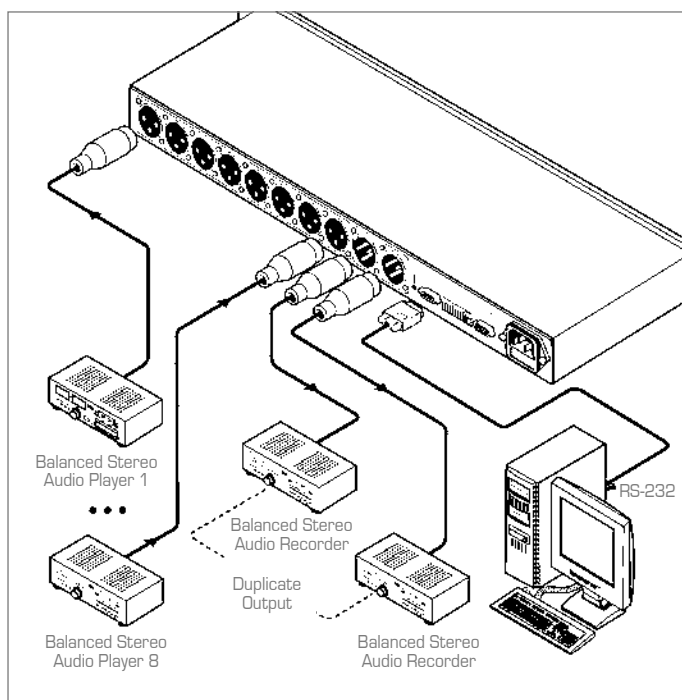

#### TECHNICAL SPECIFICATIONS

INPUTS:	8 balanced audio, + 4dBm nom. acceptor dependent input impedance, on female XLR connectors.
OUTPUTS:	2 balanced audio, + 4dBm, one fixed and one with level control on male XLR connectors. 1 DB-9 connector for control when cascading.
BANDWIDTH (- 3dB):	50kHz.
S/N:	91dB.
CROSSTALK:	Better than - 50dB.
CONTROL:	8 illuminated front-panel touch switches, RS-232 on DB-9 connector.
SWITCH RESPONSE:	Less than 3mS (when manually controlled).
THD:	Controllable output - 0.074%, @ 1kHz; second output 0.024%.
POWER SOURCE:	230VAC, 50/60Hz, (115VAC U.S.A.) 4.1VA.
DIMENSIONS:	19 inch (W), 7 inch (D), 1U (H) rack mountable.
WEIGHT:	2.6kg. (2.8lbs.) approx.
ACCESSORIES:	Power cord, Windows® - based control software, Null modem adapter.
OPTIONS:	Kramer model VS-2081S companion switcher for s-Video.

