


## VS-4216


### 16 Port RS-422 Control Data Matrix Switcher

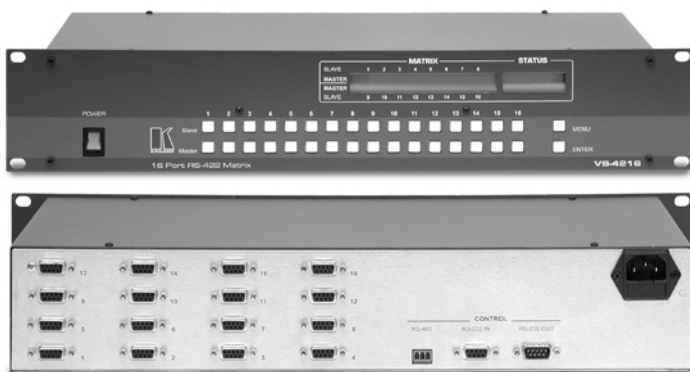

The **VS-4216** is a high performance bi-directional matrix switcher for RS-422 control signals. It can connect multiple ports to create from one to eight bi-directional communications groups.

#### FEATURES

- **Control** - Front panel, RS-232 (K-Router™ Windows®-based software is included), & RS-485.
- **Memory Locations** - Store multiple switches as presets to be recalled and executed when needed.
- **Standard 19" Rack Mount Size** - 2U.

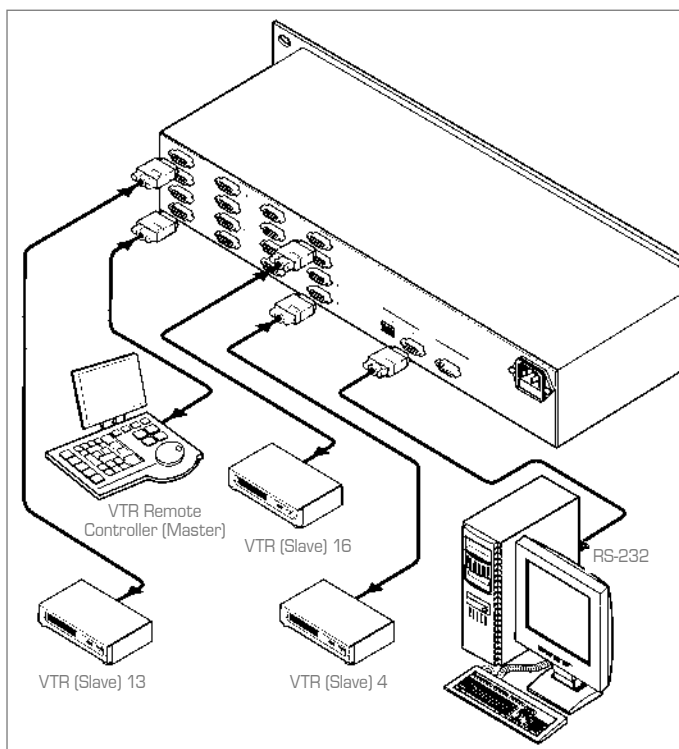

#### TECHNICAL SPECIFICATIONS

- INPUTS/OUTPUTS:** 16 in/out ports on DB-9 female connectors, fully compliant to TIA/EIA-422-B standard.  
RS-232 control via DB-9 female connector (RS-232 out on DB-9 male connector), RS-485 on terminal block assembly.
- CONTROLS:** Manual with pushbuttons on front panel, RS-485 and RS-232.
- POWER SOURCE:** 230VAC, 50/60Hz, (115V U.S.A.) 15VA.
- DIMENSIONS:** 19-inch (W), 7-inch (D) 1U (H) rack mountable.
- WEIGHT:** 3.5kg. (7.8lbs.) approx.
- ACCESSORIES:** Power cord, Windows® - based control software, Null-modem adapter.

