VS-4x4FW

4x4 FireWire® Switcher








The ${f VS-4x4FW}$ is a high performance bi-directional switcher for 6-pin FireWire (IEEE 1394) signals. It connects any one of 4 inputs to any one of four outputs.

FEATURES

- Mechanical (Passive) Switching No power required.
- Transfer Rates 100, 200, and 400Mbps.
- Desktop Size Compact size. Two units can be rack mounted side-by-side in a 1U rack space with the optional RK-81 adapter.

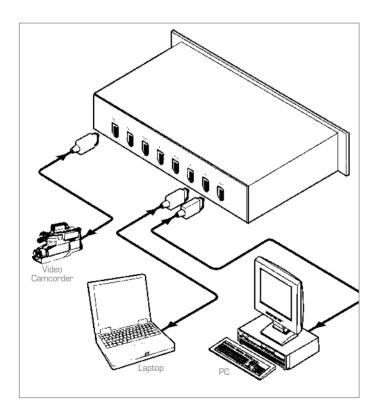

TECHNICAL SPECIFICATIONS

INPUTS: 4 Fire Wire, 6 pin connectors. OUTPUTS: SWITCHING SYSTEM: COMPATIBILITY: DIMENSIONS:

4 Fire Wire, 6 pin connectors. Mechanical, break-before-make. Up to 400MB/s. 18.8cm x 10.2cm x 4.4cm

(7.4" x 4" x 1.7", W, D, H). 0.70kg. (1.55lbs.) approx. WEIGHT: OPTIONS: RK- 81 rack adapter.

