


## VS-6EII


### 4x4 Composite Video & Stereo Audio Matrix Switcher



The **VS-6EII** is a high performance matrix switcher for composite video and unbalanced stereo audio signals. It can switch any or all of the four inputs to any or all of the four outputs simultaneously.

#### FEATURES

- **Bandwidth** - 100MHz (-3dB) fully loaded.
- **Control** - 4 rotary knobs.
- **Desktop Size** - Compact size. Can be rack mounted in a 2U rack space with the optional RK-10 adapter.

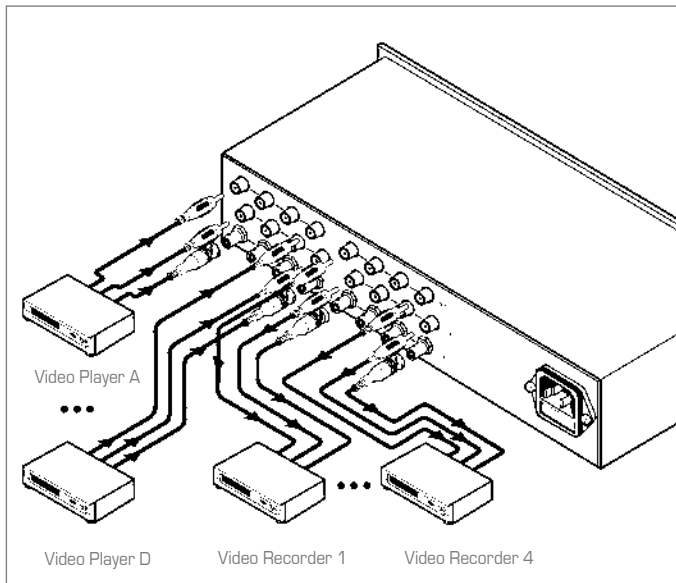

#### TECHNICAL SPECIFICATIONS

INPUTS:	4 video, 1Vpp/75Ω composite on BNC connectors. 4 audio stereo 1Vpp/100kΩ on RCA connectors.
OUTPUTS:	4 video, 1Vpp/75Ω on BNC connectors. 4 audio stereo 1Vpp/100kΩ on RCA connectors.
MAX. VIDEO OUTPUT:	2Vpp/75Ω.
VIDEO BANDWIDTH (-3dB):	100MHz.
AUDIO BANDWIDTH (-3dB):	24kHz.
DIFF. GAIN:	1.3%.
DIFF. PHASE:	0.9 Deg.
VIDEO S/N RATIO:	74dB.
AUDIO S/N RATIO:	80dB.
AUDIO THD:	0.02%.
VIDEO CROSSTALK:	-65dB (SYNC), -48dB (C).
POWER SOURCE:	230VAC, 50/60Hz, (115VAC, U.S.A.) 10.6VA.
DIMENSIONS:	24.5cm x 16cm x 5cm (9.6" x 6.3" x 1.9", W, D, H).
WEIGHT:	1.7kg. (3.8lbs.) approx.
ACCESSORIES:	Power cord.
OPTIONS:	RK-10, 19" rack adapter.

