



VS-81X 8x1 Balanced Audio Switcher

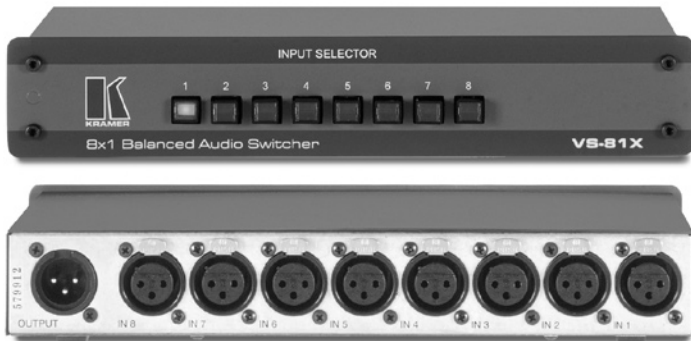

The **VS-81X** is a high performance switcher for balanced mono audio signals on XLR connectors. It switches any one of eight signals to a single output.

FEATURES

- **Mechanical (Passive) Switching** - No power required.
- **Desktop Size** - Compact size. Can be rack mounted in a 1U rack space with the optional RK-81X adapter.

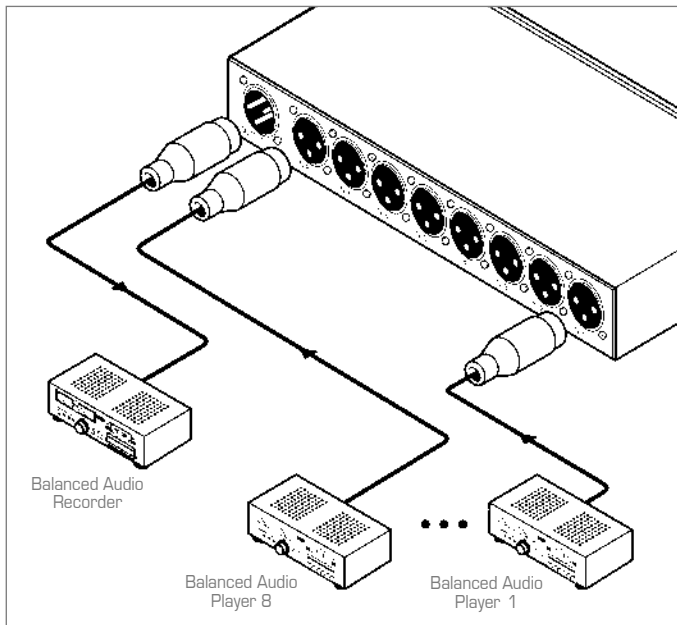

TECHNICAL SPECIFICATIONS

INPUTS:	8 balanced audio, line or mic level, on XLR connectors.
OUTPUT:	1 balanced audio, line or mic level, on an XLR connector.
BANDWIDTH (-3dB):	25kHz.
SWITCHING SYSTEM:	Mechanical, Break-before-Make.
CROSSPOINTS:	1 of 8.
MAX SIGNAL LEVELS:	+30dBm.
DIMENSIONS:	25.5cm x 10.2cm x 4.5cm (10" x 4" x 1.8", W, D, H).
WEIGHT:	0.82kg. (1.8lbs.) approx.
OPTIONS:	RK-81X, 19" rack adapter.

