


VS-88A


8x8 Balanced Stereo Audio Matrix Switcher

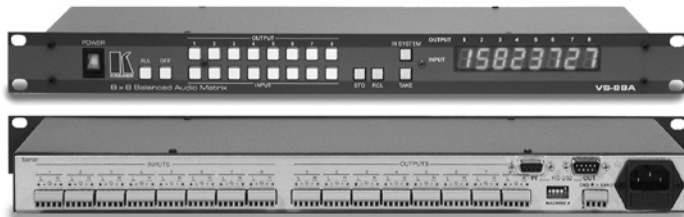

The **VS-88A** is a high performance matrix switcher for balanced stereo audio signals. It can route any or all inputs to any or all outputs simultaneously.

FEATURES

- **S/N Ratio** - 84dB unweighted (1Vpp).
- **Control** - Front panel, RS-232 (K-Router™ Windows® - based software is included), & RS-485.
- **Take Button** - Execute multiple switches all at once.
- **Memory Locations** - Store multiple switches as presets to be recalled and executed when needed.
- **Worldwide Power Supply** - 85-264V AC.
- **Standard 19" Rack Mount Size** - 1U.

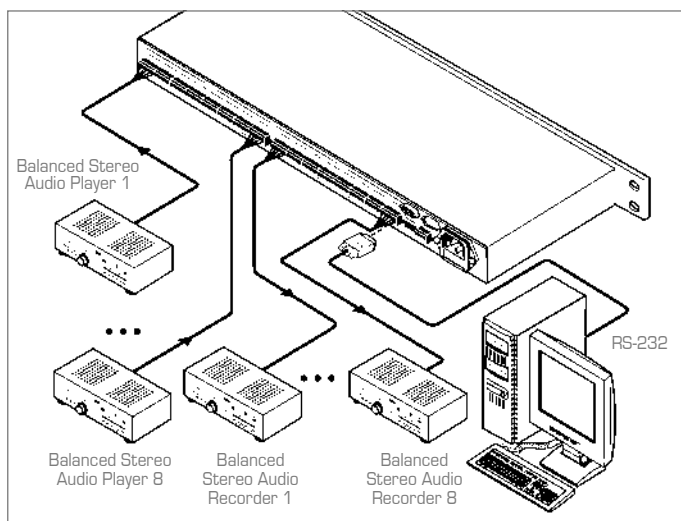

TECHNICAL SPECIFICATIONS

INPUTS:	8 balanced audio stereo, + 4dBm/33kΩ on detachable terminal blocks.
OUTPUTS:	8 balanced audio stereo, + 4dBm/50Ω (20Vpp max) on detachable terminal blocks.
AUDIO BANDWIDTH (-3dB):	100kHz.
AUDIO S/N:	84dB unweighted (1Vpp).
CONTROL:	22 front panel touch switches, RS-232 and RS-485 control interface.
AUDIO THD:	0.025% (1Vpp, 1kHz).
2nd HARMONIC:	0.013%.
MAXIMAL AUDIO:	> 25dBm.
DISPLAY:	Current switcher status on 8 7-segment bright LEDs.
POWER:	Universal, 85-264VAC, 47-440Hz, 25VA max.
DIMENSIONS:	19-inch (W) x 7-inch (D) x 1U (H), rack mountable.
WEIGHT:	3.5kg. (7.8lbs.) approx.