



SPACESAVA™MODULES

STEREO TRANSMITTER/RECEIVER UNITS

CD AUDIO TO REMOTE SPEAKERS WITHOUT WIRES

CONVERT ORDINARY POWERED SPEAKERS TO WIRELESS OPERATION

Transmit high end **Line Output** CD/DVD quality Wireless Sound to remote Speakers using DSS (Direct Sequence Spread Spectrum) that ensures the highest quality sound is always transmitted.

Any number of Speakers can operate from one Transmitter. In cases where the Speakers need to operate independently, additional Transmitters are required. Unique Data Encryption and 8 Channel Selection allows these speakers to operate using their own ID Address.

WORKS PERFECTLY WITH WIRELESS MICS WITH NO INTERFERENCE

To avoid interference from other devices, we use Addressable ID codes and 8 Channels that resynchronizes the Transmitter/Receivers signal to avoid any offending device. Although our Transmitter/Receivers operate in the 2.4 GHz band CD quality sound is not interfered by standard wireless mics, or nearby VHF or UHF Signals, Radio & TV Stations, Emergency Vehicles etc,. Because the 2.4 GHz band is Legal and Licence free throughout the world, our units are safe to use throughout the Americas, Europe and Asia without problems from the authorities.

FOR STAND ALONE USE*

Each Module can also be used without the Rack Frame.

PANEL MOUNTING

There is also a 1 Module Panel Mount that allows the the unit to be installed into a Desktop or Lectern

STEREO TRANSMITTER UNIT

2400-2884 GHz Frequency Band
16 Bit Resolution
48KHz Sampling Rate
20Hz - 20KHz Frequency Response
85 Db Dynamic Range @1KHz
85 Db Crosstalk @ 1KHz
85 Db Signal/Noise Ratio @ 1KHz
Pi/4 DQPSK with DSSS Modulation
8 Channels with 10MHz Channel Spacing
XLR, RCA & 1/4" Jack and Mini Line In Connections

POWER SUPPLY

External 110 v AC 6 v DC 500ma included

RECEIVER UNIT

Automatic Synchronization to Transmitter
Line Level Analog Output using XLR & RCA Connectors

POWER SUPPLY

External 6 v DC 500 ma included



RACK MOUNTING USING THE NIGEL B 1U OR 2U RACKFRAME™




There are more than 20 different modules to choose from each can be installed in either the 1U or 2U RackFrame™

TRANSMITTER/RECEIVER UNITS DO NOT REQUIRE LINE OF SIGHT

Using RF, these units transmit CD Quality Audio. Outside expect a distance of about the length of a Football Field. Inside* typically you can expect slightly less distance

* Depending on type of building etc.

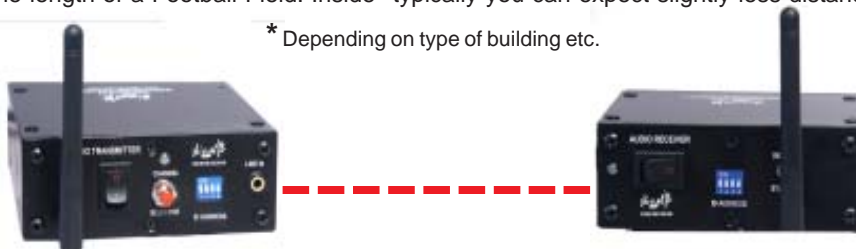

A typical Stereo Set up will require 1 Stereo Transmitter and 2 Receiver Units. There is no limit on the number of additional Speakers that can operate on the same Channel ID, however each additional Speaker will require its own Receiver Unit.

OPTIONS COMMON TO BOTH UNITS

Part# NB-TX	Stereo Transmitter	List Price \$ 599.95
Part# NB-RX	Stereo Transmitter	List Price \$ 399.95

Part # NB-1UF	1U Rack Frame	List Price \$ 89.95
Part # NB-1BP	1U Blanking Panel	List Price \$ 19.95
Part # NB-1PM	Panel Mount	List Price \$ 39.95



Nigel B Design, Inc. CA USA. Tel: (818) 487-9323 Fax: (818) 766-9805
Web Site: www.nigelbdesign.com. E-Mail: sales@nigelbdesign.com