

FIT FOR SOUND



KEY FEATURES:

- Large transport controls and selection wheel
- XLR balanced and RCA unbalanced (x2) output
- 19" rack-mountable design
- Infrared remote control with lanyard
- Large, easy-to-use navigation buttons
- Solid steel, industrial construction


GENERAL DESCRIPTION:

Fit For Sound is a 2U rack-mountable media center for iPod, enabling you to control content from your iPod via the integrated controls on the front panel or with the included remote control from a distance. The Fitness Rack-mount Player allows you to output audio from your iPod to three different locations, such as P.A. speakers and amplifiers. Balanced XLR outputs are included to ensure pristine, superb audio quality.

As an added bonus, Fit For Sound comes bundled with MixMeister Express, a software application for constructing great mixes right on your PC only. Simply install the software from the included CD and follow the quick video tutorial to learn how to create flawless music transitions. With MixMeister Express you can even dynamically change the tempo of the music, independent of its pitch. Once you have created your mix, you can load it onto your iPod and play it from the Fitness Rack-mount Player.

iPod is a trademark of Apple, Inc., registered in the U.S.A. and other countries.

THE REMOTE CONTROL:




1. >|| - This button functions as the '>||' button of your iPod.
2. |<< - This button functions as the '|<<' button of your iPod.
3. >>| - This button functions as the '>>|' button of your iPod.
4. **LANYARD** - The remote may be secured to your wrist using this lanyard.


SPECIFICATIONS:

DIMENSIONS	3.5" (H) x 19" (W) x 4.7" (D)	
WEIGHT	3.775 lbs	
AUDIO OUTPUTS	Balanced XLR	
	Unbalanced RCA (x2)	
INPUTS	4G iPod and later (with dock connector)	
POWER	AC IN, 100 ~ 240V	
	50/60 Hz, 17W	
RCA OUTPUTS	Output Level	8.2dBv +/-1dBv
	THD	Less than 0.01%
	S/N Ratio	Better than 85dB
	Frequency Response	Flat within 2dB from 20Hz to 20kHz
XLR OUTPUTS	Output Level	22.5dBu +/- 1dBu
	THD	Less than 0.01%
	S/N Ratio	Better than 85dB
	Frequency Response	Flat within 2dB from 20Hz to 20kHz
ACCESSORIES	Stereo RCA Cable (x2)	
	Software CD	
	Quickstart Manual	
	Remote Control	30 ft. range
	Power Cable	
	Safety and Warranty Information	



FRONT PANEL:

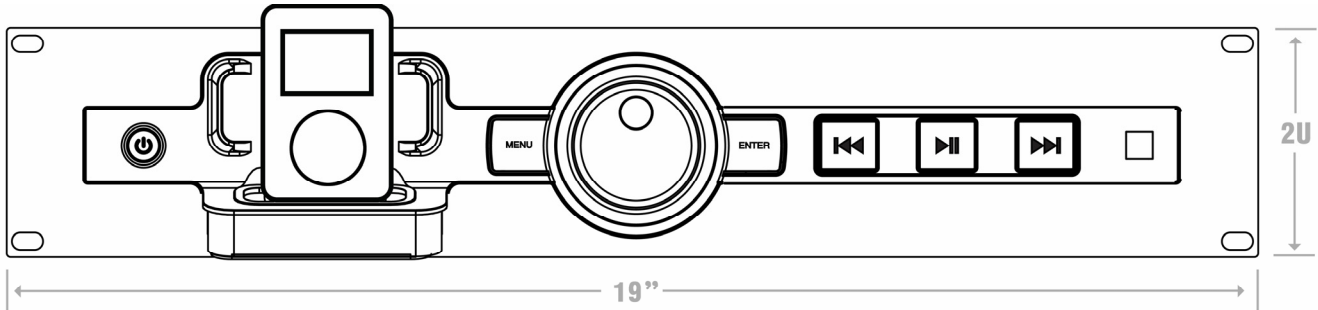

REAR PANEL:

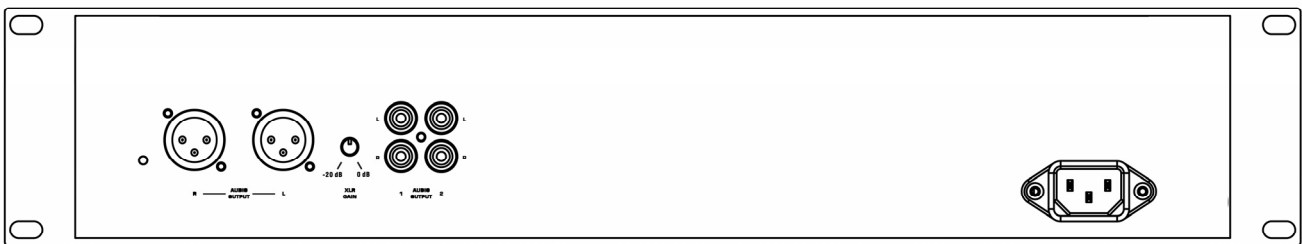

HOOKUP DIAGRAM:

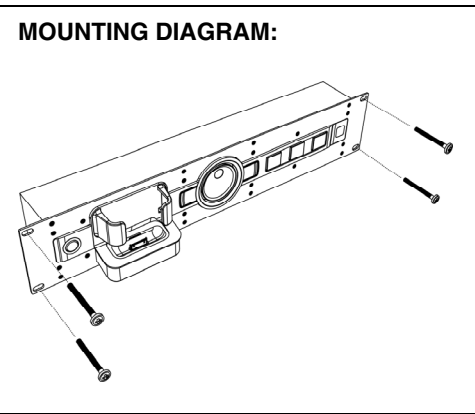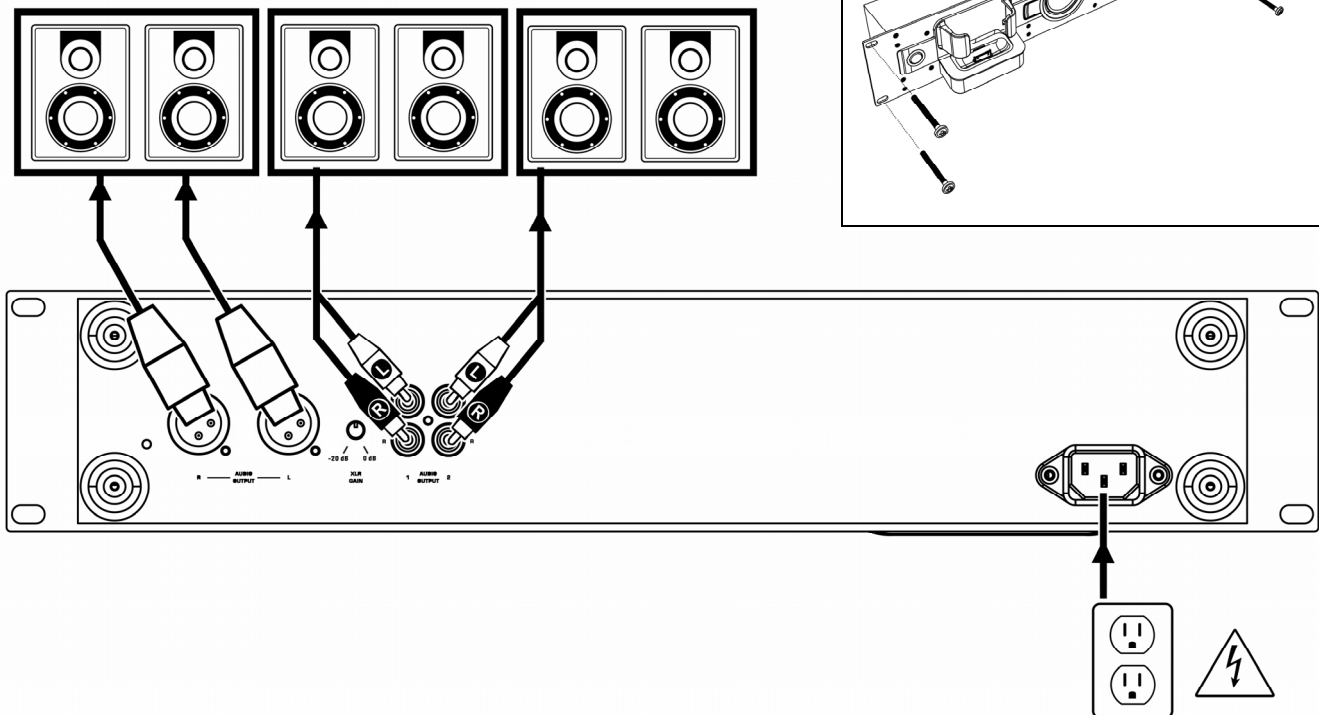

BLOCK DIAGRAM:

