

LCD TV HDTV

5-Series



Syntax-Brillian Corporation 20480 East Business Parkway City of Industry, California 91789 USA 1-866-9-OLEVIA

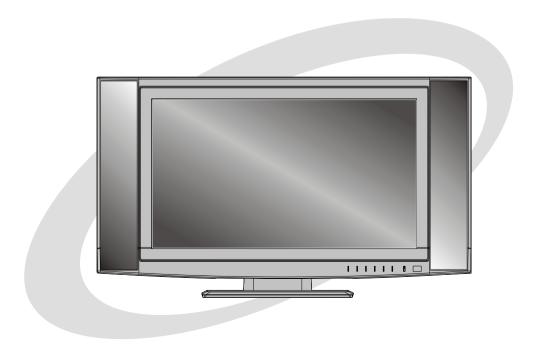


Table of Contents _____

	1
Important Safety Precautions	2
Introducing the Syntax-Brillian OLEVIA TV	5
Accessories	7
TV Installation And Connection Guide	0
Identifying Front Controls and Rear Panels	8
- Descriptions of Connector Types	10
- Connecting the Power Cord	11
Installation	
- Connecting to an Antenna or Video Equipment with Antenna Outlet	13
- Connecting to a Set-Top-Box with HDMI Cables	
- Connecting to a Satellite Receiver or Cable Box with Component Connectors	
- Connecting to a DVD Player with A/V or S Video Cables	
- Connecting to a DVD Player with Component Cables	17
- Connecting to a DVD Player with HDMI Cables	
- Connecting to a Satellite Receiver or Cable Box with A/V Cables	19
- Connecting to a VCR, PVR, or DV with A/V Cables	20
- Connecting to a Blue-Ray DVD Player or HD-Receiver with HDMI Cables and a	
PC with VGA Cables	21
- Connecting to a D-VHS with HDMI Cables	22
- Connecting to a D-VHS with Component Cables	23
- Connecting to an Audio Receiver/Home Theater System - Other Audio Connections	24
- Uner Audio Connections - Instruction for Uploading New Firmware	25
	26
Remote Control Guide - Regular Buttons	
- Battery Installation	
On Screen Display (OSD)	30
Introduction	31
0 " 1 " 00"	
PICTURE OSD Adjusting TV Picture Settings	32
- Description of Settings	32
- Initial Screen	32
- Selecting the Picture Mode	33
- Adjusting the Picture Quality	34
AUDIO OSD Adjusting Sound Quality	35
- Description of Settings	
- Adjusting the Audio Settings	
- MTS System for Stereo TV	
SCREEN OSD Adjusting Screen Modes	37
- Description of Settings	
- Changing the Screen Mode	37
- Selecting the Picture/Video Source	38
SETUP OSD Adjusting Personal TV Settings	39
- Description of Settings	
- Searching the TV Channels	
- Editing Channels	41
- Closed Caption Options	45
- Setting up Parental Control Password	46
- Activating the Parental Control Feature	46
- Resetting the Password	52
- Setting the Date and Time	
- Setting the TV Timer	54
- Timeout Settings for OSD Menu	54
- TV OSD Languages	55
- Setting DPMS	55
	55
- Displaying the Firmware Version	55
	56
Timing Mode for VGA and DVI	58
Pixels Policy	59
Glossary	60
Code Number Lists for Remote Control	64

Important Information



Caution

Risk of electronic shock Do not open



To reduce the risk of electronic shock, do not remove cover (or back).

No user-serviceable parts inside.

Refer service to qualified Repair Technician or Repair Center.



Read the following context indicated by the following symbol to the left. It indicates important literature in operating the product.



Read the following context indicated by the following symbol to the left. It indicates a potential high voltage hazard that may compromise your safety.



Caution

Take caution when moving the product on a cart.

Quick stops, excessive force, and uneven surfaces may cause the display unit and cart combination to overturn.

Caution

To prevent electric shock, match wide blade of plug to wide slot, fully insert.

Caution

This product satisfies FCC regulations when shielded cables and connectors are used to connect the unit to other equipment. Prevent electromagnetic interference from electrical appliances such as radios and televisions. Please use shielded cables and connectors for connections.

Warning

FCC Regulations state that any unauthorized changes or modifications to this equipment not expressly approved by the manufacturer could void the user's authority to operate this equipment.

Important Safety Precautions

Cleaning

Remember to unplug the AC cord from the AC outlet before cleaning the display unit.

Then spray small amount original WINDEX window clearer (blue stuff), not Ammonia-added clearer, on cloth to clean the display.

Remember to use only soft cotton cloth such as an old 100% cotton T-shirt, not sponges brillo abrasive material, to clean the display.


No drips allowed.



Ventilation

Do not cover or block these vents and openings located on the top and back of the display. Inadequate ventilation may cause overheating and shorten the lifespan of the display. Do not place in an enclosed area such as a built-in shelf, unless proper ventilation is provided or the manufacturer's instructions are followed. Keep the distance of 10cm minimum between the display unit and wall. Never install the display unit as indicated in the picture below.

Air circulation is blocked



Stand

Do not place the display unit on an unstable place. The TV may fall resulting in serious personal injuries to nearby people as well as damage to the display unit.





Air circulation is blocked



Never insert objects or spill liquid into the display unit

Never insert any object into the display unit through openings or spill liquid on the display unit. High voltage flows in the display unit, and inserting an object can cause electric shock and/or short internal parts.



Keep away from water and moisture

Do not place the display in areas where moisture is present or where the unit may get wet such as bathrooms, kitchen, pool area or in a wet basement.

Keep away from heat sources

Keep the display unit away from heat sources such as radiators, heaters, stoves and other heat-generating products.

The liquid crystal panel used in this product is made of glass

Do not hit the panel. Be careful to prevent from getting hurt by broken glass pieces in case the panel breaks.

Follow operating instructions


All operating instructions must be followed.

Servicing

Do not attempt to service the display unit yourself. Removing covers expose you to high voltage and other dangerous conditions. Request a qualified service technician to perform the service.

Precautions when transporting the display

Carrying the display requires two or more people.



Attachments

Do not use attachments not recommended by the manufacturer. Use of inadequate attachments may result in accidents to nearby poeple or to the unit.

Power source

This product must operate on a power source specified on the specification label. If you are not sure of the type of power supply used in your home, consult your dealer or local power company. For units designed to operate on batteries or another power source, refer to the operating instructions.

AC cord protection

The AC cords must be routed properly to prevent people from stepping on them or objects from resting on them. Check the cords at the plugs and product.

Wall mounting

Be sure to install the display unit according to the method recommended by the manufacturer. Use only the mounting hardware recommended by the manufacturer.

Overloading

Do not overload AC outlets or extension cords. It may result in electric shock or start a fire.

Replacement parts

In case the display unit needs replacement parts, make sure that the service technician uses replacement parts specified by the manufacturer, or those with the same characteristics and performance as the original parts. Use of unauthorized parts can result in fire, electric shock and/or other danger.

Safety checks

Upon completion of service or maintenance, request the service technician to perform safety checks to ensure that the display unit is in proper operating condition.

Repair

When the display unit displays an abnormal condition, any noticeable abnormality in the display unit indicates that the display unit needs servicing. If any of the following conditions occurs, unplug the AC cord from the AC outlet, and request a qualified service person to perform repairs.


- **1.**A liquid was spilled on the display unit or objects have fallen into the display unit.
- **2.**The display unit has been exposed to rain or water.
- **3.**The display unit has been dropped or damaged.

Environment

The display unit only operates within the temperature 0°C to 40°C. Operation outside of the recommended may cause damage to your product.

Warning

When installing or realigning an outside antenna system, extreme care should be taken to keep from touching such power lines or circuits. Contact with them could be fatal.



Antenna and satellite grounding

Reference	Grounding component
1	Electric service equipment
2	Power service grounding electrode system (NEC Art 250. Part H)
3	Ground clamps
4	Grounding conductors (NEC Section 810-21)
5	Antenna discharge unit (NEC Section 810-20)
6	Grounding clamp
7	Antenna lead-in wire

Introducing the Syntax-Brillian™ OLEVIA TV

Welcome!

Thank you for purchasing a Syntax-Brillian[™] OLEVIA LCD HDTV. This manual is to be used with the following model:

OLEVIA 5 Series

This manual is designed to help you through setting up and operating your LCD HDTV as quickly as possible. The model and serial numbers are on the back cover of your TV. Write these numbers in the space provided in this manual for your records. Please read all the safety and operating instructions carefully, and keep this manual for future reference.

Owner's Record

The model and serial numbers are located at the rear of the display unit, or on the side of the media receiver unit on the cartons (white label). Record these numbers in the spaces provided below. Refer to them whenever you call Syntax-Brillian Groups Corporation or local dealer regarding this product.

Model No			
Serial No			

Package Contents

- -Syntax-Brillian[™] OLEVIA display unit
- -Remote Control
- -1 AC power cord
- -Quick Start Guide
- -Warranty Card

These items are all you need to set up and operate the TV in its basic configuration.

Note: Most components (VCRs, DVD players, etc.) come with the necessary cables to connect them. If you want to set up a complex system, you may need to buy extra cables, connectors, etc. Be sure to have these on hand before you start to connect your system.

Syntax-Brillian[™] OLEVIA LCD HDTV includes many features, you will enjoy throughout the usage of your TV. These highlighted features include:

Fully Integrated HDTV (High Definition TV):

HDTV delivers a stunning picture far beyond the quality of standard televisions. These programs offer crystal clear video with amazing detail played with enhanced audio quality of digital television programs. You can enjoy better sound and picture in movies, prime time TV shows, and other HD broadcasts in dynamic television settings through cable, satellite or even free broadcasts over the air.



HDMI (High Definition Multimedia Interface):

The next generation of DVI, HDMI provides the best interface between a DVD player and compatible products such as digital set top box for uncompressed digital audio/video connections. When matched with a Syntax-Brillian OLEVIA TV, multi-channel digital audio signals, uncompressed DVI digital video and intercommunication between high multimedia interfaces are combined through a single interconnecting cable.



ATI:

For a true high definition cinematic experience, your Syntax-BrillianTM TV uses the XilleonTM image processing chip from ATI. The XilleonTM chip offers many advanced features.



The XilleonTM chip allows your new Syntax-BrillianTM TV to display a spectrum of over 16 million colors, so you can enjoy a true color viewing experience with vivid tones and natural hues.

XilleonTM uses advanced digital image processing technologies to convert standard definition signals (such as those usually found in analog TV broadcasts, DVDs, and cable set-top boxes) to the brilliant 1366 x 768 format used by your Syntax-BrillianTM TV.

With analog video still being broadcast, XilleonTM integrates a 3D comb to virtually eliminate problems like dot crawl and keep your Syntax-BrillianTM display looking its finest.

Xilleon™ uses advanced deinterlacing technology to reduce artifacts such as jagged lines in moving pictures. Contrast, sharpness, saturation and many other parameters are also automatically optimized 60 times per second.

Enjoy your new Syntax-Brillian[™] TV powered by ATI Xilleon.[™]



Supplied Accessories

Remote control & batteries (AAA x 2)



Power cord x 1



User manual (CD-ROM) x 1



QSG x 1



Warranty Card x 1




Optional Accessories

Wall Mount Set

Model # WM10D : available for 20" \sim 23" Models



Model # WM30D : available for 26" above Models




- 1. Before using the wall mount, please read its Quick Start Guide and follow assembly guide.
- 2. For safety purpose, please purchase wall mount that will support the LCD HDTV weight.
- 3. Following installation instruction is only for your reference.
- 4. Please consult authorized service personnel for the installation of wall mount.

TV Installation and Connection Guide

Identifying Front and Rear Panels

Front Panel

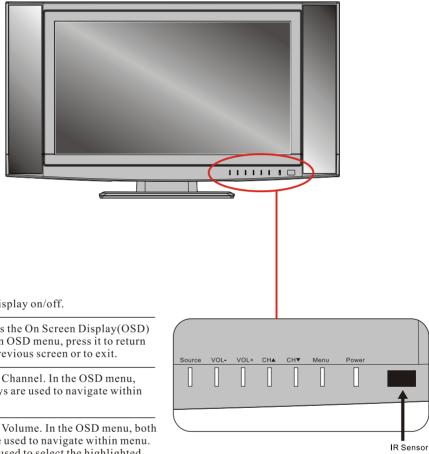

POWER Turns display on/off.

MENU Displays the On Screen Display(OSD) menu. In OSD menu, press it to return to the previous screen or to exit.

CH▲ / **CH**▼ Adjusts Channel. In the OSD menu, both keys are used to navigate within menu.


VOL+/VOL- Adjusts Volume. In the OSD menu, both keys are used to navigate within menu. Vol+ is used to select the highlighted option.

SOURCE Press to switch the input sources.

IR SENSOR Contains Infra-red light for digital data transmission by the remote control. Please point remote control at IR Sensor for function.

Identifying Front and Rear Panels

Rear Panel



1 Power Connections					
AC In	The power cord connects here.				
2 Compute	2 Computer / TV Signal Connections				
RF Terminal	To receive signals from VHF / UHF antennas or a cable system (For TV Models Only)				
Component R Pr/Cr	(5 RCA jacks) Used to connect A/V equipment with component video outputs, such as a DVD player, Digital Satellite Receiver, or compatible Video Game System.				
L Pb/Cb	NOTE: The component inputs have a superior quality of picture than the S-Video or AV (composite video) inputs.				
R Video R S-Video	AV (Composite Video: 3 RCA jacks): Used to connect a VCR, Super VHS (S-VHS), DVD player, or other video devices to the TV. OR S-Video: (1 DIN and 2 RCA jacks) Used to connect video devices to the TV. However, they have a better quality of picture than a composite video signal.				
HDMI/DVI	Used to connect digital video equipment with a HDMI/DVI output. NOTE: Preferred connection for HDMI/DVI Satellite or Set-Top-Box equipment.				
VGA/Audio Input (PC) Port R L	Used for analog RGB signals from a personal computer. VGA has one set of Audio R/L inputs. OR As a computer input with VGA to RCA Adapter.				
Audio Input	To send an AV receiver or other equipment to the TV's connected audio signals				
USB Service Port	To download some information from website to TV for user				
RS232 Service Port	Only for Service Technician use, not an interface for other devices. Warning! This RS232 control port is for service purpose only, and should be used by trained serviceman only. Any random connection may cause damage to this unit.				
Earphone ∩ ●	Used for audio output to earphone.				

Descriptions of Connector Types


You may find it necessary to use some of the following cable types during setup.

75-ohm Coaxial Cable	For TV/cable connection
S-Video Cable	Used for transferring video signal, which is split into two signals, brightness and color. Through this connection, you can view a better picture than AV (Composite Video) connection.
Audio/Video Cable	Used for transferring audio and video signal.
Video (Yellow) Left Audio (White) Right Audio (Red)	This connection is the most commonly found on A/V equipment.
Component Cable Y (Green) Pb/Cb (Blue) Pr/Cr (Red)	Used for transferring video signal, which is split into three signals, one brightness and two color. Through this connection, you can view a better high definition picture than S-Video or AV (Composite Video) connection.
HDMI Cable	Used for transferring digital uncompressed video and audio signals to the TV. HDMI signal is purely digital and provides a crystal clear technology better than component, S-Video or Video connections. It is strongly recommended to use this connection if you have this function on your equipment.

Connecting the Power Cord

Complete other connections prior to connecting the power cord:

1. Connect the power cord to the AC IN connector of the TV.

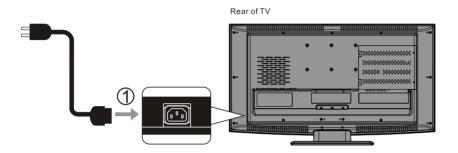

2. Connect the other end of the power cord to the wall outlet.



Installation


In the following pages, you will find directions on how to install your tv and choice of video equipment.

- Connecting to an Antenna or Video Equipment with Antenna outlet
- Connecting to a Set-Top-Box with HDMI Cables (Preferred TV connection)
- Connecting to a Satellite Receiver or Cable Box with Component Connectors (Secondary Preferred after HDMI)
- Connecting to a DVD Player with A/V or S Video Cables
- Connecting to a DVD Player with Component Cables
- Connecting to a DVD Player with HDMI Cables
- Connecting to a Satellite Receiver or Cable Box with A/V Cables
- Connecting to a VCR, PVR, or DV with A/V Cables
- Connecting to a Blue-Ray DVD Player or HD-Receiver with HDMI Cables and a PC with VGA Cables
- Connecting to a D-VHS with HDMI Cables
- Connecting to a D-VHS with Component Cables
- Connecting to an Audio Receiver/Home Theater System
- Other Audio Connections
- Instruction for Uploading New Firmware

Connecting to an Antenna or Video Equipment with Antenna outlet (For TV and DTV Source)


⚠ Disconnect all power sources before making any connection.

1. Connect a 75-ohm coaxial cable (or choice of Antenna Cable) from your cable or antenna to the TV's VHF/UHF jack (RF Terminal).

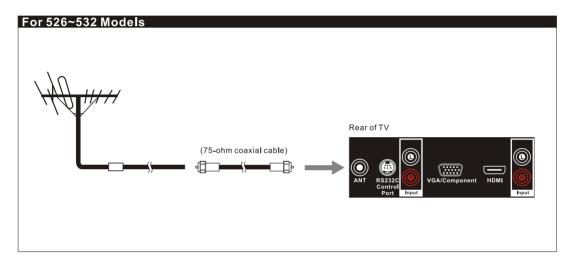

If connecting to Video Equipment with Antenna outlet


- 1. Connect a 75-ohm coaxial cable (or choice of Antenna Cable) from your cable or antenna to the Video Equipment's IN jack.
- 2. Connect another 75-ohm coaxial cable from the Video Equipment's OUT jacks to the TV's VHF/UHF jacks (RF Terminal).

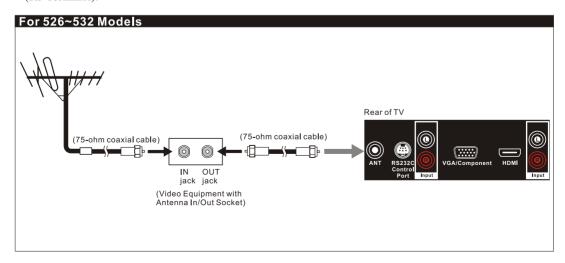

Connecting to a Set-Top-Box with HDMI Cables

⚠ Disconnect all power sources before making any connection.

- 1. Connect a 75-ohm coaxial cable (or choice of Antenna Cable) from your cable or antenna to the Set-Top-Box's VHF/UHF jack (RF Terminal).
- 2. Connect a HDMI cable from the Set-Top-Box's HDMI OUT jacks to the TV's HDMI IN jacks.

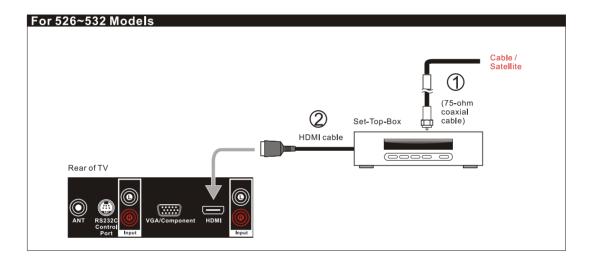

Note: HDCP is a copy protected digital connection that receives analog or digital video and audio signals from equipment with a HDMI output that features the HDCP function. HDMI allows the transfer of digital uncompressed data to the TV. This connection is superior when compared to the Component, S Video or AV (composite) connections.

Note: HDMI signal is purely digital and provides a better picture, it is better than component, S-Video or Video connections. It is strongly recommended to use this connection if you have this function on your equipment.

Connecting to a Satellite Receiver or Cable Box with Component Connectors (Secondary Preferred after HDMI)

⚠ Disconnect all power sources before making any connections.

Use this method of connection if your Satellite Receiver or Cable Box has component (Y, Pb, Pr) jacks.

1. Using a component video cable, connect the Satellite Receiver or Cable Boxes' Y, Pb and Pr jacks to the Y, Pb and Pr jacks on the TV.

Colors on Component Video connectors:


Y: Green

Pb (also identified as Cb, CB or B-Y): Blue

Pr (also identified as Cr, CR or R-Y): Red

Note: The Y, Pb and Pr jacks on your Satellite Receiver or Cable Box are sometimes labeled as Y, Cb and Cr, or B-Y and R-Y. If so, connect the cables to the matching colors.

2.Using an Audio cable, connect the Satellite Receiver or Cable Boxes' Audio OUT jacks to the TV's Audio in jacks.

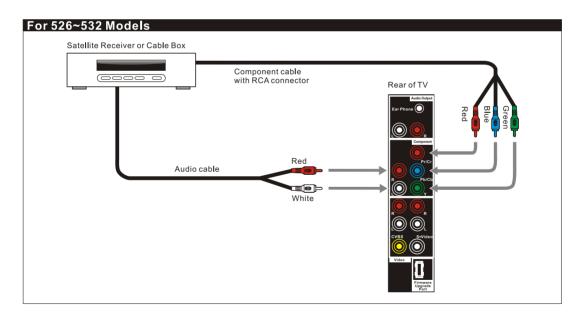

Note: The Y, Pb and Pr jacks do not provide audio, so audio cables must be connected to provide sound.

Note: The YPbPr connection provides the best quality of video signal compared to AV (composite) and S-Video connection.

Note: YPbPr is set at default to best perform with HD 720p and 1080i content, set Input to "Interlace DVD" for best performance with regular 480i and 480p content. (Menu - Picture - Mode - Input = "Interlace DVD")


Connecting to a DVD Player with A/V or S Video Cables

⚠ Disconnect all power sources before making any connections.

Use this method of connection if your DVD player does not have component (Y, Pb, Pr) jacks.

Note: If your DVD player has component video output connectors, for best picture quality, use the connection described for *Connecting to a DVD Player with Component Connectors*. (See page. 17)

- 1. Using an A/V cable, connect the DVD player's Audio OUT jacks to the TV's Audio IN jacks.
- 2.Using an S-Video Cable, connect the DVD player's S Video OUT jack to the TV's S Video IN jack.

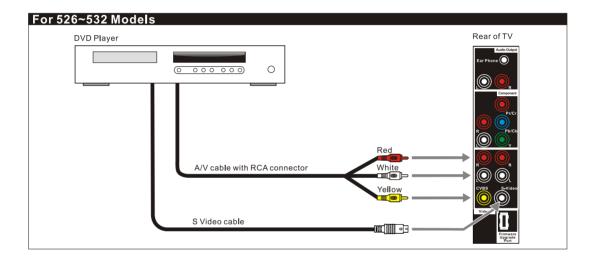

Note: When you connect video equipment to both the same Video and S-Video input jacks, the display will automatically select S-Video first.

To view Video signal, please disconnect the S-Video jack or turn off the Video signal on the video equipment.

- S-Video is strongly recommended for use if your VCR or video equipment has the option.
- S-Video input has better quality of picture than a composite Video signal.

Connecting to a DVD Player with Component Cables

⚠ Disconnect all power sources before making any connections.

Use this method of connection if your DVD Player has component (Y, Pb, Pr) jacks.

1.Using a component video cable, connect the DVD Player's Y, Pb and Pr jacks to the Y, Pb and Pr jacks on the TV.

Colors on Component Video connectors:


Y: Green

Pb (also identified as Cb, CB or B-Y): Blue

Pr (also identified as Cr, CR or R-Y): Red

Note: The Y, Pb and Pr jacks on your DVD player are sometimes labeled as Y, Cb and Cr, or B-Y and R-Y. If so, connect the cables to the matching colors.

2. Using an Audio cable, connect the DVD player's Audio OUT jacks to the TV's Audio in jacks.

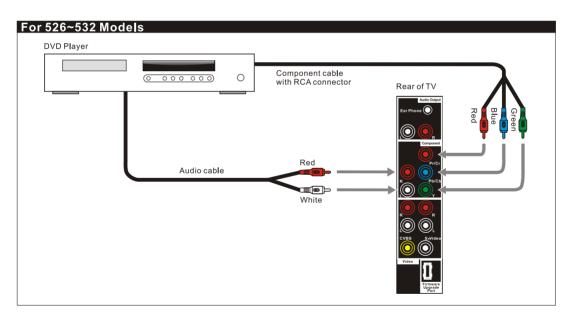

Note: The Y, Pb and Pr jacks do not provide audio, so audio cables must be connected to provide sound.

Note: The YPbPr connection provides the best quality of video signal compared to AV (Composite) and S-Video connection.


Note: YPbPr is set at default to best perform with HD 720p and 1080i content, set Input to "Interlace DVD" for best performance with regular 480i and 480p content. (Menu - Picture - Mode - Input = "Interlace DVD")

Connecting to a DVD Player with HDMI Cables

⚠ Disconnect all power sources before making any connections.

Use this method of connection if your DVD Player has HDMI jacks.

1.Using a HDMI cable, connect the DVD Player's HDMI output terminal to the TV's HDMI-HDCP input terminal.

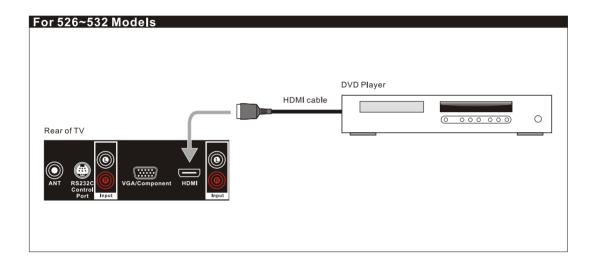


Note: HDCP is a copy protected digital connection that receives analog or digital video and audio signals from equipment with a HDMI output that features the HDCP function. HDMI allows the transfer of digital uncompressed data to the TV. This connection is superior when compared to the Component, S Video or AV (composite) connections.

Note: HDMI signal is purely digital and provides a better picture, it is better than component, S-Video or Video connections. It is strongly recommended to use this connection if you have this function on your equipment.

Connecting to a Satellite Receiver or Cable Box with A/V Connectors

⚠ Disconnect all power sources before making any connections.

- 1.Connect a 75-ohm coaxial cable from your Cable TV to the Satellite Receiver's or Cable Box's Ant (Antenna) jack.
- 2.Using Audio and S Video cables, connect the satellite receiver's Audio and S-Video OUT jacks to the TV Audio and S Video IN jacks.

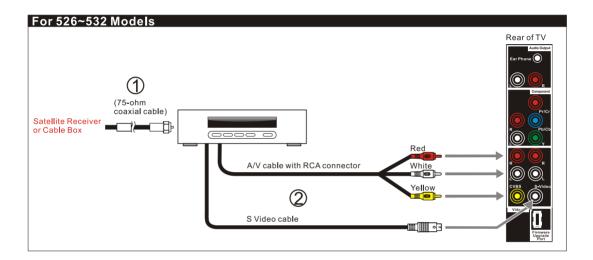

Note: When you connect video equipment to both the same Video and S-Video input jacks, display will automatically select S Video first.


To view S-Video signal, please disconnect Video jack or turn off the Video signal on the video equipment.

S-Video is strongly recommended for use if your VCR or video equipment has it because S-Video input has better quality of picture than a composite Video signal.

Connecting to a VCR, PVR, or DV with A/V Cables

⚠ Disconnect all power sources before making any connections.

1. Using A/V cable and S-Video cables, connect the video equipment's Audio and S-Video OUT jacks to the TV's Audio and S-Video In jacks.

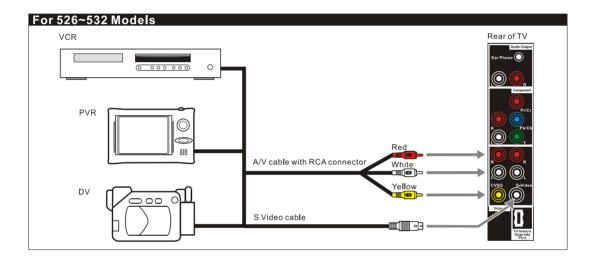

Connecting both Video IN and S-Video IN

Note: When you connect video equipment to both the same Video and S-Video input jacks, display will automatically select S-Video first.

To view Video signal, please disconnect the S-Video jack or turn off the S-Video signal on the video equipment.


S-Video is strongly recommended for use if your VCR or video equipment has it. S-Video input has a better quality of picture than a composite Video signal.

Connecting to a Blue-Ray DVD Player or HD-Receiver with HDMI Cables

- ⚠ Disconnect all power sources before making any connections.
- 1.Using a HDMI cable, connect the DVD's HDMI output terminal to the TV's HDMI-HDCP input terminal.


Note: HDCP is a copy protected digital connection that receives analog or digital video and audio signals from equipment with a HDMI output that features the HDCP function. HDMI allows the transfer of digital uncompressed data to the TV. This connection is superior when compared to the Component, S Video or AV (composite) connections.

Note: HDMI signal is purely digital and provides a better picture, it is better than component, S-Video or Video connections. It is strongly recommended to use this connection if you have this function on your equipment.



Connecting to a PC with VGA Connector


- <u>M</u> Disconnect all power sources before making any connections.
- 1.Using a D-Sub 15 pin cable, connect the VGA output terminal of the PC to the TV's VGA signal input terminal.
- 2. You may need to use a Stereo mini jack to Audio in connectors to receive audio.



Connecting to a D-VHS with HDMI Cables

⚠ Disconnect all power sources before making any connections.

- 1. Connect a 75-ohm coaxial cable from your cable or antenna to the Set-Top-Box's Antenna jack.
- 2.Using Audio and S-Video (YPbPr, or HDMI is strongly recommended) cables, connect the Set-Top-Box's Audio and S-Video OUT jacks to the TV's Audio and S-Video IN jacks.
- 3. Connect an I-Link cable from the Set-Top-Box to the D-VHS equipment for video transmission and record.
- 4.Using a HDMI cable, connect the D-VHS's HDMI OUT jack to the TV's HDMI IN jacks for watching the recorded videos.

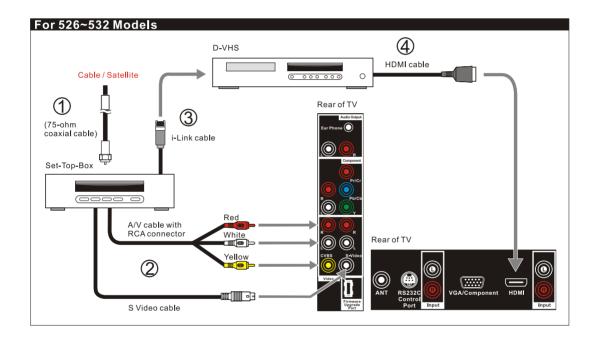

Note: HDCP is a copy protected digital connection that receives analog or digital video and audio signals from equipment with a HDMI output that features the HDCP function. HDMI allows the transfer of digital uncompressed data to the TV. This connection is superior when compared to the Component, S Video or AV (composite) connections.

Note: HDMI signal is purely digital and provides a better picture, it is better than component, S-Video or Video connections. It is strongly recommended to use this connection if you have this function on your equipment.

Connecting to a D-VHS with Component Cables

⚠ Disconnect all power sources before making any connections.

Use this method of connection if your D-VHS has component (Y, Pb, Pr) jacks.


- 1. Connect a 75-ohm coaxial cable from your cable or antenna to the Set-Top-Box's Antenna jack.
- 2.Using Audio and S-Video (YPbPr, or HDMI is strongly recommended) cables, connect the Set-Top-Box's Audio and S-Video OUT jacks to the TV's Audio and S-Video IN jacks.
- 3. Connect an I-Link cable from the Set-Top-Box to the D-VHS equipment for video transmission and record.
- 4. Using Audio and Component video cables, connect the D-VHS's Audio and Y, Pb and Pr OUT jacks to the TV's Audio and Y, Pb and Pr IN jacks for watching the recorded videos.

Colors on Component Video connectors:

Y: Green

Pb (also identified as Cb, CB or B-Y): Blue

Pr (also identified as Cr, CR or R-Y): Red

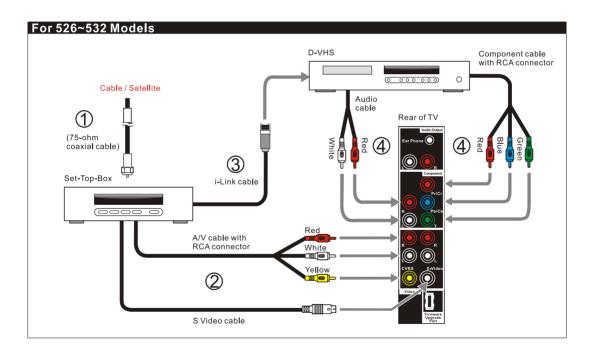

Note: The Y, Pb and Pr jacks do not provide audio, so audio cables must be connected to provide sound.


Note: The YPbPr connection provides the best quality of video signal compared to AV (Composite) and S-Video connection.


Note: YPbPr is set at default to best perform with HD 720p and 1080i content, set Input to "Interlace DVD" for best performance with regular 480i and 480p content. (Menu - Picture - Mode - Input = "Interlace DVD")

Connecting to an Audio Receiver / Home Theater System

⚠ Disconnect all power sources before making any connections.

1.Using the audio cable, connect the TV's audio OUT jack to the audio receiver's or Home Theater System's audio IN or AUX IN jacks.

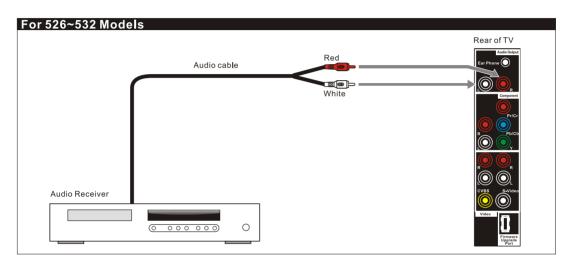

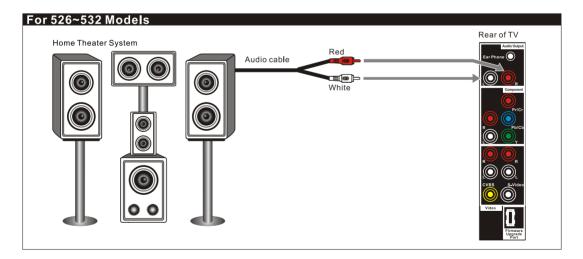

Note: When connecting an Audio output signal, an external Audio amplifier is necessary to amplify the signal for external speakers.


Note: If you connect a Home Theater Sound System, please disable the TV's speakers in the OSD by selecting off in audio section. Volume adjustment must be made on the Home Theater Receiver. By not disabling the TV's speakers it may cause the speakers or the TV itself damage.


Other Audio Connections

⚠ Disconnect all power sources before making any connections.

See setup instructions for: Connecting to an Audio Receiver on page 24.

Note: Speakers must be amplified using an audio receiver such as a Home Theater System to amplify the audio from the TV.

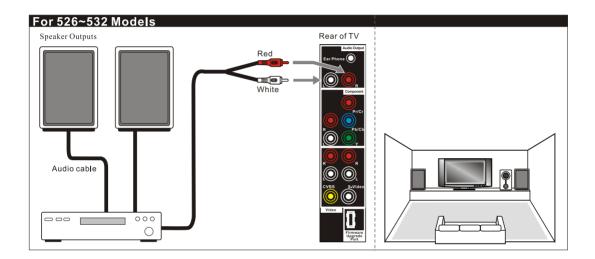

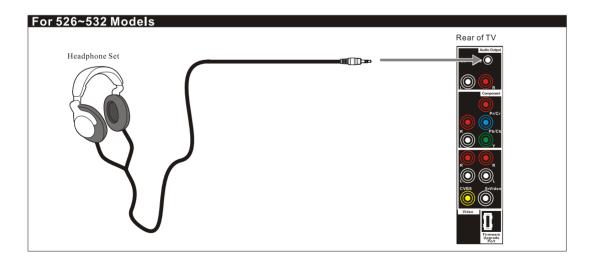

Note: When headphone is plugged in the speaker, it will turn into mute mode.

Instruction for Uploading New Firmware

- 1.Please visit our website for the detail information.
- 2.Please register LCD TV on our website.
- 3. Please log on to the firmware download section by following the instructions.
- 4. Please review the available downloads, the bugs fixed, and the new features added.
- 5.Please follow the instructions on the website for their specific model for downloading the new firmware and for loading the firmware into the TV.


Remote Control Guide _____

Remote Function Keys & Description (For 526~527 Models)

Regular Buttons

- **POWER** Press to turn display on/off.
- **2 LIGHTING** Press to switch the lighting mode between Dark, Medium, Bright Room.
- **3 ASPECT** Press to switch the aspect ratio between Aspect, Full, Panoramic, Zoom, 1:1 mode.
- 4 FREEZE Press to freeze the picture. Press again to unfreeze the picture.
- **5 NUMBER BUTTONS** Press to select channels on the display.
- 6 **RETURN** Press to return the previous-channel.
- **7** VOL+/VOL- Press to adjust the volume.
- 8 MUTE Press to mute the sound.
- **9** DIRECTION BUTTONS:
 - ▲/▼ Press to select between four main sections or select the function item.
 - ◄/► Press to enter to Sub-Menu, select the function item or adjust the value bar.
- **SOURCE** Press to switch the source input between Tuner, Composite, S-Video, Component, HDMI, VGA, and VGA Component.
- **AUDIO** Press to switch the TV Audio System between SAP, Mono or Stereo mode.
- **AUTO** Press to adjust screen position automatically when the screen image is not centered under VGA mode.
- 3 C.C. Press to call up the Closed Caption (CC) and Caption Service (CS) list.
- **FAVORITE** Press to select favorite channels. Can be preset in OSD Menu.
- **IS SLEEP** Press to automatically shut off the TV after a preset period of time has passed.
- **CH+/CH-** Press to adjust channel up and channel down.
- **TIME** Press to set the display to automatically turn off at the set time.

- **MENU** Press to activate or close the On Screen Display menu.
- **ENTER** Press to enter to Sub-Menu, or highlight and set up menu.
- **DISPLAY** Press to display the information of current channel number and time.

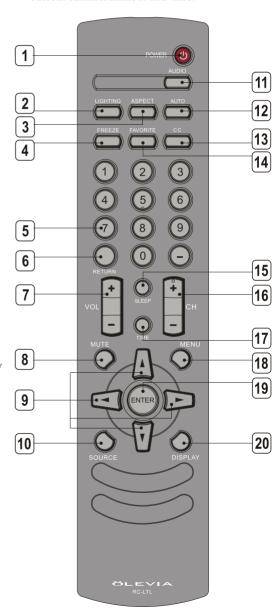


Remote Function Keys & Description (For 532 Model)

- **POWER** Press to turn display on/off.
- **2 FUNCTION** Press to select the equipment item you want to program or operate.
- **3 NUMBER BUTTONS** Press to select channels on the display.
- 4 Press to select sub-channel.
- **5 AUDIO** Press to switch the TV Audio System between SAP, Mono or Stereo mode.
- **6** DIRECTION BUTTONS:
 - ▲/▼ Press to select between four main sections or select the function item.
 - →/➤ Press to enter to Sub-Menu, select the function item or adjust the value bar.
- **SOURCE** Press to switch the source input between Tuner, Composite 1, Composite 2, S-Video 1, S-Video 2, Component 1, Component 2, HDMI, VGA.
- 8 VOL+/VOL- Press to adjust the volume.
- **9 CH RTN** Press to return the previous-channel.
- **MENU** Press to activate or close the On Screen Display menu.
- **ENTER** Press to enter to Sub-Menu, or highlight and set up menu.
- 12 MUTE Press to mute the sound.
- 13 CH+/CH- Press to adjust channel up and channel down.
- **14 HotKeys** Press to directly access certain Shortcut TV functions.
 - **1. SLEEP** Press to automatically shut off the TV after a preset period of time has passed.
 - **2. FAVORITE** Press to select favorite channels. Can be preset in OSD Menu.
 - **3. DISPLAY** Press to display the information of current channel number.
 - **4. LIGHTING** Press to switch the lighting mode between Dark, Medium, Bright Room.
 - **5. FREEZE** Press to freeze the picture. Press again to unfreeze the picture.
 - **6. C.C.** Press to turn on/off the Closed Caption (CC) function.
 - **7. AUTO** Press to adjust screen position automatically

when the screen image is not centered under VGA mode.

- **8. ASPECT** Press to switch the aspect ratio between Aspect, Full, Panoramic, Zoom, 1:1 mode.
- **9. SWAP** Press to swap the positions of the source when in PIP or Split Screen modes.
- **10. VIEW** Press to select and program Full Screen, PIP and Split Screen viewing options.
- 11. GUIDE Press to see the Channel Guide.
- **12. INFO** Press to see the current program name and relevant information.
- **15** Other Buttons They only can work when operating the other equipments such as DVD, or VCR device.

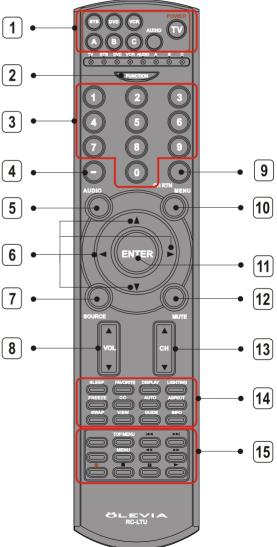

Programming the Remote Control (For 532 Model)


If you have the other equipment you want to operate with the TV's remote control, do the following procedures to program the remote control.

- 1. Select the 4-digit code number for the equipment you want to operate from the lists on Page 64.
- 2. Press the "FUNCTION" button repeatedly to select the equipment item you want to operate.
- **3.** Press the "ENTER" and "FUNCTION" buttons at the same time for 4-5 seconds.
- **4.** Once the Indicator LED for the equipment item you select flashes orange light once, enter the 4-digit code number using the numeric buttons.

Note: If there are more than one code on the list, try entering the code one by one until it is correct for the equipment.


- **5.** Afterwards, the Indicator LED will flash orange light for a while, and then stop flashing.
- 6. Check if the code number is correct by aiming the TV's remote control at the equipment and then press the equipment's POWER button, such as STB, DVD, or VCR...etc.


Note: If it responds, the programming is completed. If not, try the other code again following the steps above.

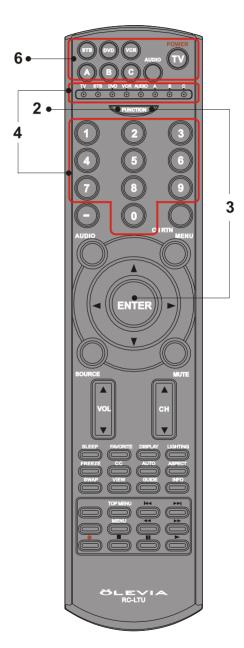

Battery Installation

- 1. Push the tab and pull it out as illustrated below.
- 2.Insert two size AAA (for 526~527 models) or AA (for 532 model) batteries (supplied) by matching the (+) and (-) on the batteries to the diagram inside the remote control's battery department.
- 3.Replace the cover back and make sure the cover "snaps" into the remote control.





Note:

- 1. The display unit comes with two new AAA (for 526~527 models) or AA (for 532 model) batteries as accessories.
 - However, due to uncontrollable causes, the electricity of the accessory batteries may be partially or completely drained. We do not warrant the quality of the batteries in any case since many factors are considered. If replacement is needed, please purchase two AAA (for 526~527 models) or AA (for 532 model) batteries.
- 2. Handle remote with care. Avoid dropping it, placing in direct sunlight, near a heater, high areas of humidity or getting it wet. If the remote gets wet, please wipe it dry immediately. In the event of the remote not working properly or is in operational, a replacement of remote control may be required.
- 3.If you do not use the remote control for a long period of time, please remove the batteries and store in a cool place to preserve battery life.
- 4.Do not mix new and used or with different types of batteries for operation.

On Screen Displays (OSD).

Introduction

After you have finished connecting your TV, you are now ready to choose and personalize your TV settings in the OSD (On Screen Display) menu.

There are four main sections in the OSD Menu:

Picture OSD



Screen OSD



Audio OSD




Setup OSD



Operating in the OSD

- 1. Press " button to enter OSD menu mode.
- 2. To select between four main sections, press the keys "▲" and "▼".
- 3. To enter to Sub-Menu,press the keys
 "◄","▶" or "♠
 ".
- 4. To select the function item, press the keys "\(\Lambda \)", "\(\V \)", "\(\Rightarrow \)", or "\(\Rightarrow \)".
- 5. To adjust the value bar, press the keys "◀" and "▶".
- 6. To select and set up, press " [NTER] ".
- 7. To go back to last OSD Menu or exit the OSD menu, press " again or without action for 12 seconds of inactivity.

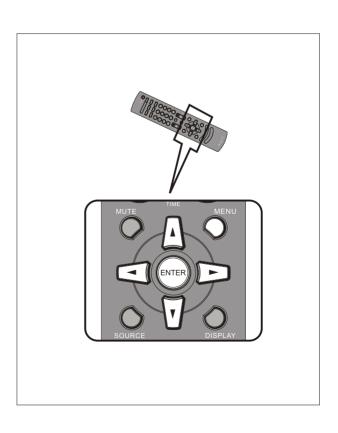

Picture OSD Adjusting TV Picture Settings

Description of Settings

Itam	Adirotmont	Function
Item	Adjustment	Function
Brightness		To adjust brightness contrast of the picture
Contrast		To adjust color contrast of the picture
Color temp		To adjust image color intensity
6500		
6500 User	Red Gain / Green Gain	To allow User to adjust RGB value
	Blue Gain / Red Offset	
	Green Offset / Blue Offset	
9300		
9300 User	Red Gain / Green Gain	To allow User to adjust RGB value
	Blue Gain / Red Offset	
	Green Offset / Blue Offset	
Color		To adjust the color intensity
Tint		To decrease or increase red or green tones of the picture
Sharpness		To adjust sharpness or softness of the picture
Mode		
Lighting	Dark / Medium / Bright Room	To adjust darkness or lightness of the screen
Input	VCR / Interlaced DVD /	To select the video input source with varied qualities
	Progressive DVD / Standard	·
	Def TV / High Def TV / User	

Initial Screen




The first time you power on the TV, the options below will appear for your selection.

Show Room:

You may select it when watching in the show room.

Home:

You may select it when watching at home.

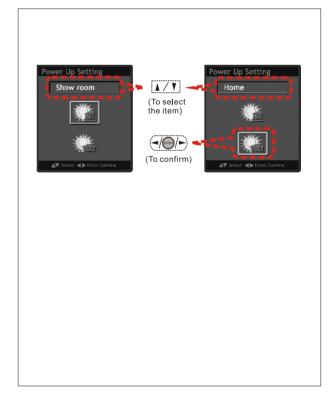

Selecting the Picture Mode

▶ Mode

In this "Mode" Index, you can select one of the picture modes which is suitable for the program you are watching.

Lighting:

To adjust darkness or lightness of the screen

* Dark Room: To darken the screen


* Medium Room

* Bright Room : To brighten the screen

Input:

To select the video input source with varied qualities

- * VCR
- * Interlaced DVD
- * Progressive DVD
- * Standard Def TV
- * High Def TV
- * User

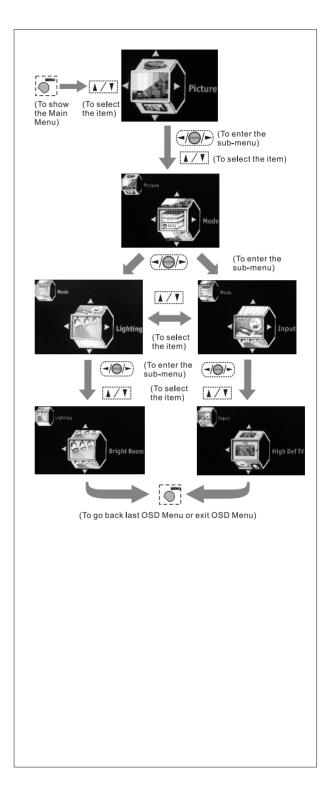

Adjusting the Video or Picture Quality

In this Setup Index, you can adjust the video and picture settings to suit your personal preferences.

Brightness

To darken or brighten the picture

Contrast

To reduce(soften) or enhance(deepen) color contrast of the picture

Color

To decrease or increase color intensity of the picture

> Tint

It allows you to decrease or increase red or green tones of the picture.

Sharpness

To soften or sharpen the picture

Color Temp

To customize the RGB settings

6500

6500 User:

- * Red Gain- To increase red tones of the picture
- * **Green Gain-** To increase green tones of the picture
- * Blue Gain- To increase blue tones of the picture
- * Red Offset- To decrease red tones of the picture
- * Green Offset- To decrease green tones of the picture
- * Blue Offset- To decrease blue tones of the picture


9300


9300 User:

The settings are as the same as the "6500 User" option.

Native:

To select the nature color tones of the picture



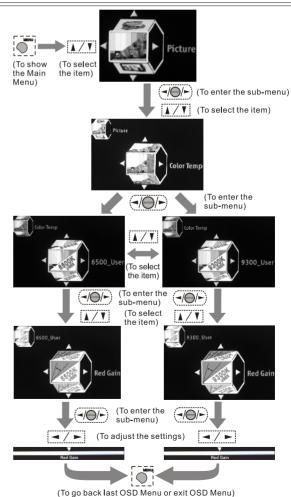

Audio OSD Adjusting Sound Quality

Description of Settings

**		
Item	Adjustment	Function
Treble		It allows to adjust higher pitched sounds.
Bass		It allows to adjust lower pitched sounds.
Balance		It allows to adjust volume balance of the R/L speakers for
		the best stereo reproduction.
Language	English, Français, Español	There are three language formats available for program
		broadcasting.
MTS (Multi-channel	Mono, SAP, Stereo	It allows to select the sound reception of stereo, bilingual
Television Sound)		and mono programs between the TV Audio System.
Mute	On, Off	It allows to mute the sound.
Speaker	On, Off	It allows to turn On/Off the speakers of the TV when using
		a Receiver or Home Theater System.

Adjusting the Audio Settings

In this Setup Index, you can adjust the audio settings to suit your personal preferences.

> Treble

Decreases/Increases high pitch sounds.

Bass

Decreases/Increases low pitch sounds.

Balance

Adjusts volume to R/L speakers for the best stereo reproduction.

Language


There are three language formats available for program broadcasting. You may select from: English, Español, Français.

Mute

Mutes sounds.

Speaker

Turns TV speakers On/Off when using Home Theater System.

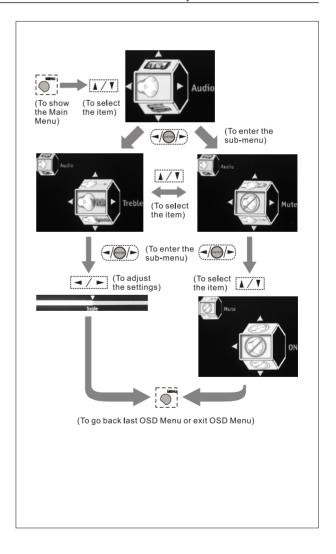

MTS System for Stereo TV

In this Setup Index, you can adjust the audio settings to suit your personal preferences.

➤ MTS

Toggles audio through Stereo, SAP and Mono.

Mono:


Selects Mono reception. (Uses to reduce noise during weak stereo broadcasts)

SAP:

Selects audio to Secondary Analog Program. (If no SAP signal is present, the TV remains in Stereo Mode)

Stereo:

Selects Stereo reception when viewing a program.

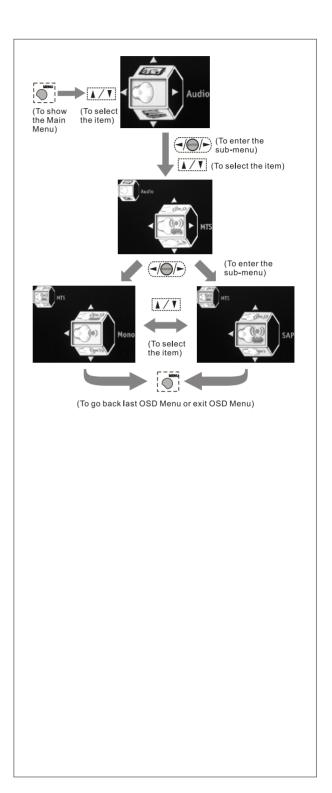

Screen OSD Adjusting Screen Modes

Description of Settings

Item	Adjustment	Function
Adjustment		
H.Position		It allows you to adjust the picture position horizontally.
V.Position		It allows you to adjust the picture position vertically.
Fine Tone		It allows you to enhance the picture quality.
Aspect Ratio	Aspect, Full Screen,	It allows you to select the aspect ratio of the picture you
	Panoramic, Zoom 1,	are watching.
	Zoom 2, 1:1 Mode	
Cropping	On, Off	Once activating this function, the picture you are watching
		will be enlarged. Then its edges will be cropped
		automatically.
Source	Tuner, Composite,	It allows you to select one of the picture or video sources
	S-Video, Component,	you want to view.
	HDMI, VGA, VGA	
	Component	

Changing the Screen Mode

In this Setup Index, you can adjust the screen settings to suit your personal preferences.

Adjustment (Analog Source Only)

Adjusts the picture position and its quality.

H.Position:

Moves the picture left and right in the "Full Screen, Panoramic, and Zoom" modes.

V.Position:

Moves the picture up and down in the "Full Screen, Panoramic, and Zoom" modes.

Fine Tone:

Enhances picture quality by reducing horizontal flickering. (VGA mode only)

Auto Sync:


Adjust the image to its best position and automatically displays on the screen.

Aspect Ratio

It allows you to select the aspect ratio of the picture you are watching.

Aspect:

Toggles picture between 16:9 / 4:3 aspect ratio.

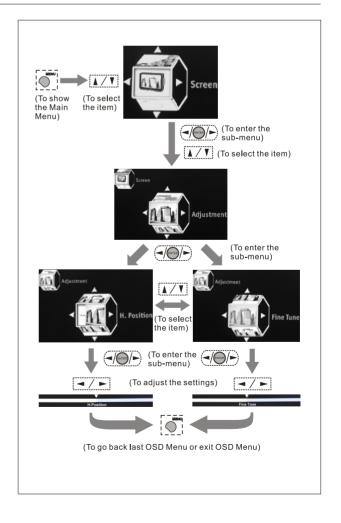

Full Screen:

Enlarges a 4:3 picture to fill the 16:9 screen.

Panoramic:

Enlarges a picture from 4:3 to 16:9 by stretching it horizontally.

Zoom 1:

Stretches the image both horizontally and vertically.

Zoom 2:

Stretches the image both horizontally and vertically, which will lose part of the image on both ends.

1:1 Mode:

Returns the image to its original mode.

> Cropping

Crops image and then enlarges it to fill the screen.

(Note: This feature helps remove any noise visible under both vertical and horizontal edges of the image)

Selecting the Picture or Video Source

In this Setup Index, you can select the input source of the picture or video you want to view.

➤ Main Picture Source

It allows you to view images from optional video equipment connected to this unit by selecting the appropriate input source.

Tuner:

Composite:


S-Video:


Component:

HDMI:

VGA:

VGA Component:

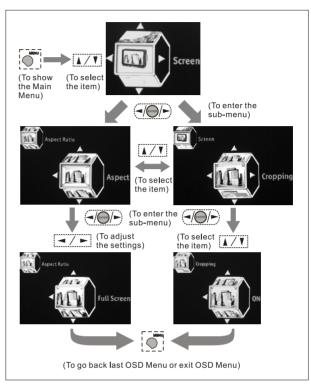

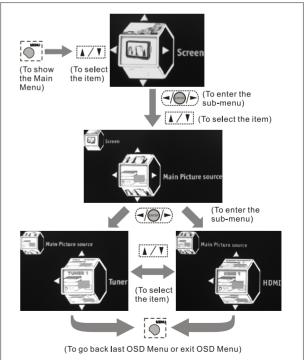

Setup OSD Adjusting Personal TV Settings

Description of Settings

Item	Adjustment	Function
TV		
Channel Setup	Favorite, Skip, Name	It allows you to set up Channel functions.
Auto Channel Search	Cable Standard, Air	It can auto scan the available channels of the TV or CATV.
Channel Add		It allows you to add channels to your favorite channel list.
Closed Caption		It allows you to select the Closed Caption type shown on
		the TV program.
Analog Type	Off, CC1~4, T1~4	
Digital Type	Off, CS1~6	
Font	As Broadcaster, Stype1~7	,
Size	As Broadcaster, Large,	
	Medium, Small	
Font Color	Black, White, Green, Blue	,
	Red, Cyan, Yellow, Magen	ıta
Background Color	Black, White, Green, Blue	,
	Red, Cyan, Yellow, Magen	nta
Parental Control		
Enter Password		
Rating	On, Off	
MPAA Rating	G/PG/PG-13/R/NC-17/X	
Block Unrating	On, Off	
TV Rating	TV-Y/ TV-Y7/ TV-Y7-FV	
	TV-G/TV-PG(V,S,L,D)/	
	TV-14(V,S,L,D) / TV-MA	
	(V,S,L)	
Canada English Rating		
Canada French Rating		
Channel Block		
Change Password		
Timers	Sleep, Timer # 1,	It can be set to turn on / off the TV automatically at the set
	Timer # 2	time.
Date and Time		It allows you to set the information of "Date and Time".
Menu Timeout	10, 20, 30	It can be set to shut off the TV automatically after a preset
		period of time has passed.
Language		It allows you to set the OSD Menu language.
DPMS	On, Off	TV and Backlight will shut off automatically when no video
		source is detected when DPMS is active.
Factory Settings		It can reset all parameters in OSD Menu Mode for all input
		sources.
Factory Settings by Input		It can reset all parameters in OSD Menu Mode for the
		source yo u select currently.
Firmware Version		

Searching the TV Channels

In this Setup Index, you can pre-search all channels before watching the programs.

> Auto Channel Search

Will scan and preset all receivable channels automatically.

Cable:


Selects cable if using tuner as the input.

- * Auto
- * Standard
- * HRC
- * IRC

Air:

Selects air if using antenna.

(NOTE: The Auto Scan is set to scan cable TV channels by default. You cannot receive and set the cable TV channels and VHF/ UHF channels at the same time.)

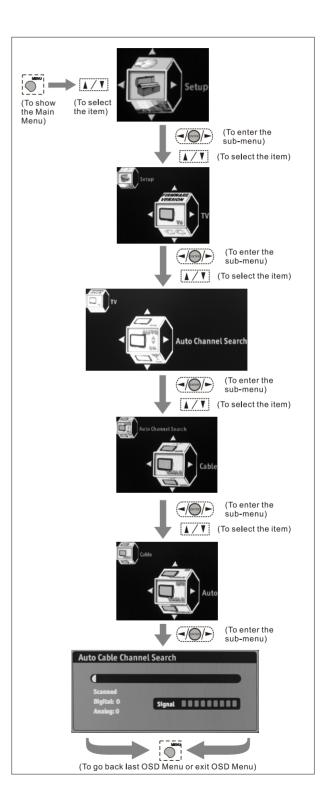

Editing Channels

In this Setup Index, you can edit channels to suit your personal preferences.


> Channel Setup

Will scan and preset all receivable channels automatically.

Favorite:

Selects and stores a list of favorite channels.


Browses through favorite channels by pressing Hotkey "FAVORITE".

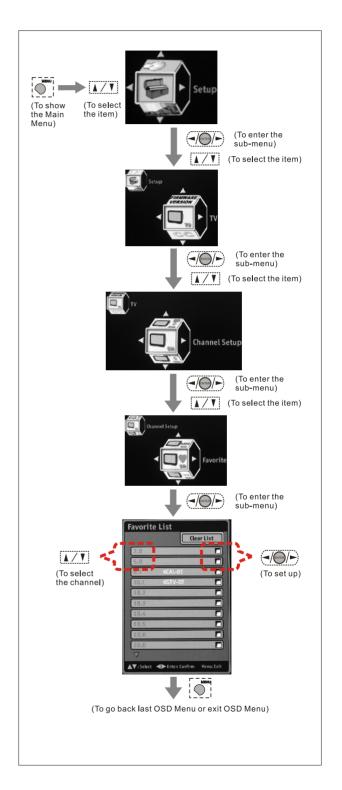

Skip:

Skips channels from viewing.


(NOTE: Once this function is set, the skipped channels will not be displayed after searching. If you wish to view later, enter the channel number by pressing the numeric keys on the remote control.)

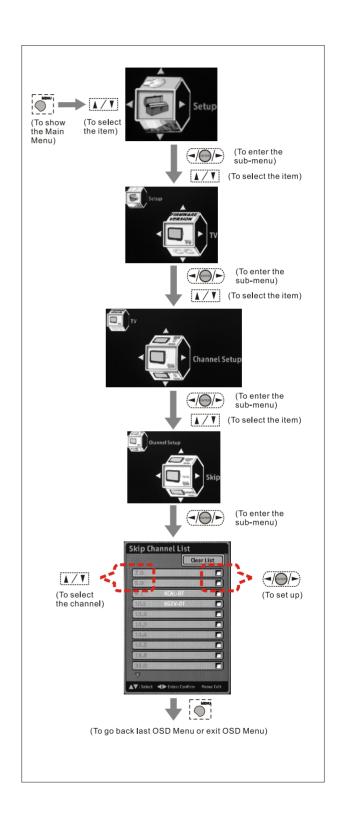

Name:


Creates a personal name for each channel.

(Name will appear in the upper-right corner of the screen)

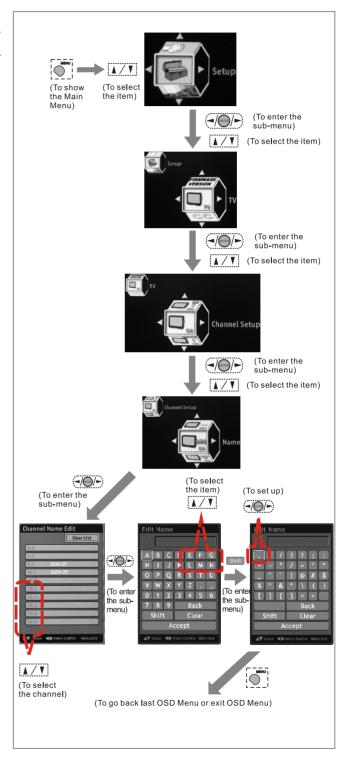

> Channel Add:

Adds channel currently on display to the FAVORITE channel list.

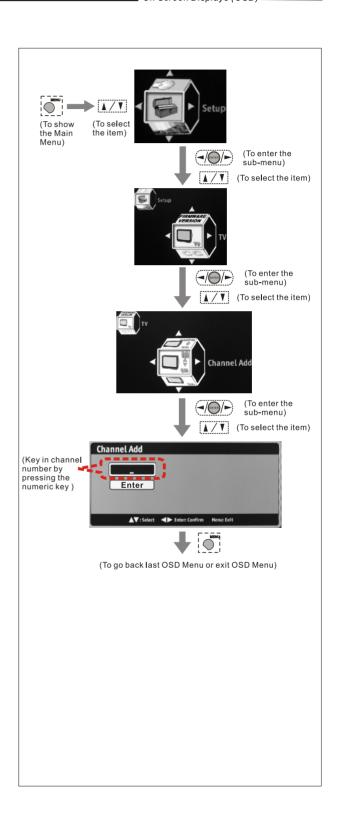

Closed Caption Options

Displays the audio portion of a television signal as text on the television screen.

> Analog Type

If there is Closed Caption data shown on the analog TV channel, you can select your preferred Closed Caption type by scrolling through CC1~4, T1~4.

CC1: is used for most programs
CC2: may be used for alternate languages
Text: is used for network and station
information, such as channel guides,
schedules, or bulletin board, for Closed
Caption programs.

Digital Type

Selects preferred Close Caption type by scrolling through CS1 - 6.

> Font

Selects preferred font by scrolling through As Broadcaster, Style 1-7. (Digital TV channel only)

> Size


Selects preferred font size by scrolling through As Broadcaster, Large, Medium, Small. (Digital TV channel only)

> Font Color

Selects preferred font color by scrolling through As Broadcaster, Black, White, Green, Blue, Red, Cyan, Yellow, Magenta. (Digital TV channel only)

➤ Background Color

Selects preferred background color by scrolling through As Broadcaster, Black, White, Green, Blue, Red, Cyan, Yellow, Magenta. (Digital TV channel only)

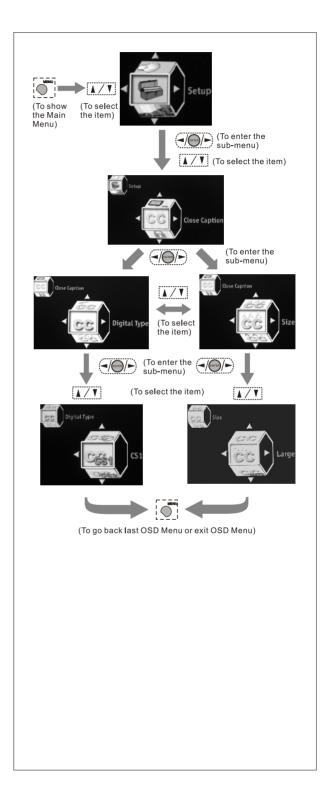

Setting up Parental Control Password

This function allows programs to be restricted and controlled by parents.

Enter Password

Password is necessary to enter and re-enter the Parental Control Menu screen.

(NOTE: The Factory Default password is "99999".)


Activating the Parental Control Feature

Blocks programs based on programing rating system.

The TV Parental Control features by receiving the rating signal from your local broadcasting station or cable service provider.

Rating

- * On- To activate rating function
- * Off- To disable all of rating functions

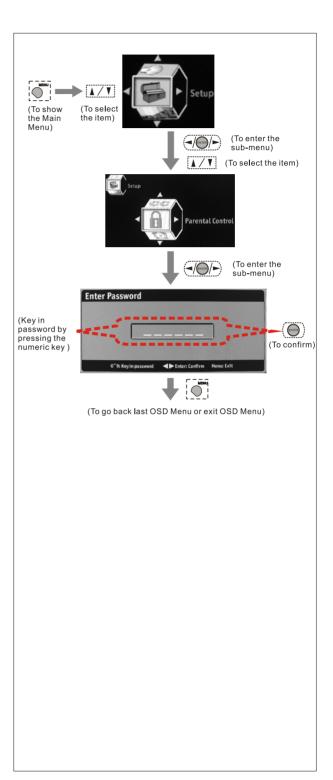

> MPAA Rating

Motion Picture Association of America provide movie ratings, including those shown on TV.

G: (General Audience) No restriction.


PG: (Parental guidance suggestion) Children under 13 should be accompanied by an adult.

<u>PG-13</u>: (Parents strongly cautioned) Children under 13 should be accompanied by an adult.

 $\underline{\mathbf{R}}$: (Restricted) Viewers should be 17 or older.

 $\underline{\text{NC-17}}$: (Not classified) Viewers should be 17 or older.

 \mathbf{X} : (Adults only)

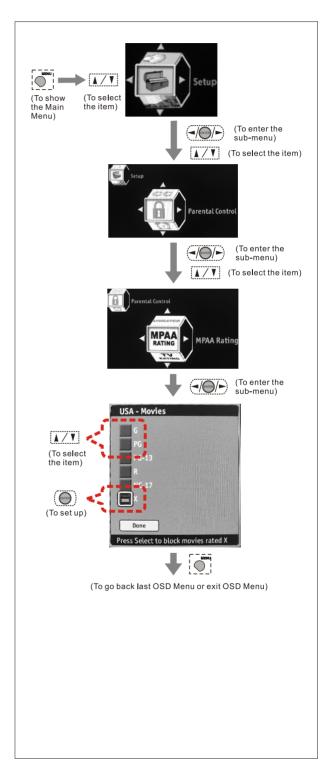

> TV Rating

U.S. TV ratings are for TV programs rated according to the U.S. Television Parental Guidelines.

TV-MA/V/S/L: (Mature audiences only)

<u>TV-14/V/S/L/D</u>: (Parents strongly cautioned)

TV-PG/V/S/L/D: (Parental guidance suggested)

TV-G: (General audience)

<u>TV-Y7/FV</u>: (Directed to children under 7 or older)

TV-Y: (All children)


(NOTE: When you block the lower rating, the higher age-based ratings are blocked automatically.)

Block Unrating

You may select "On" for MPAA Unrated and TV Unrating. This allows you to block programs or movies that are broadcast without a rating.

To watch unrated channels, re-activate MPAA Unrated and TV Unrating to "Off".

(NOTE: The unrated option is available only when you have selected U.S.A. as your country/ region.)

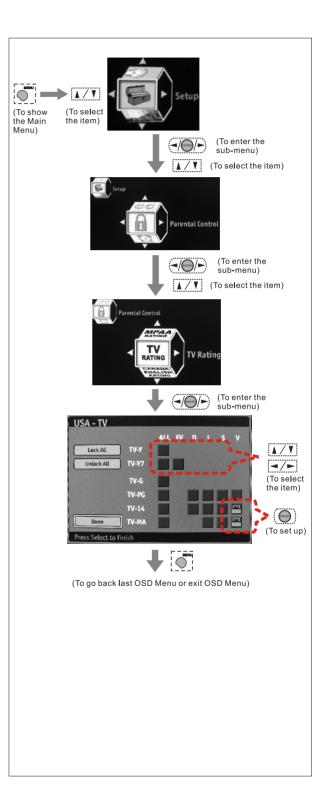

Canada English Rating

It is available for TV programs in English broadcast in Canada.

C: (Intended for children under 8)

<u>C8+</u>: (Generally considered acceptable for children aged 8 and older to watch on their own)


G: (General Audience)

PG: (Parental Guidance) Parents may consider some content inappropriate for unsupervised viewing by children aged 8-13.

14+: (Not suitable for viewers under the age of 14)

18+: (Adult)

NOTE: When you block the lower rating, the higher age-based ratings are blocked automatically.

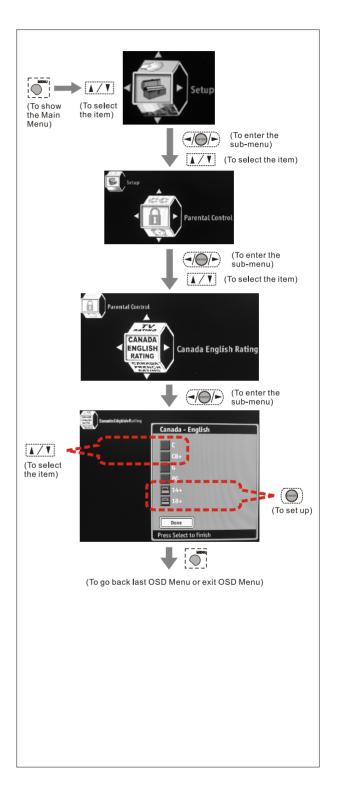

Canada French Rating

It is available for TV programs in French broadcast in Canada.

G: (General Audience)


<u>8 ans+</u>: (8+ General--Not recommended for young children under the age of 8)

13 ans+: (Not suitable for children under the age of 13)

16 ans+: (Not suitable for children under the age of 16)


-----,

18 ans+: (Restricted to adults)

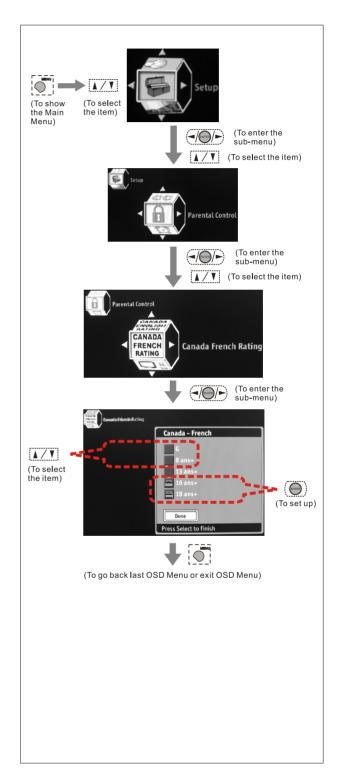

> Channel Block


In this Setup Index, you may select the blocked ratings to suit your personal preferences.

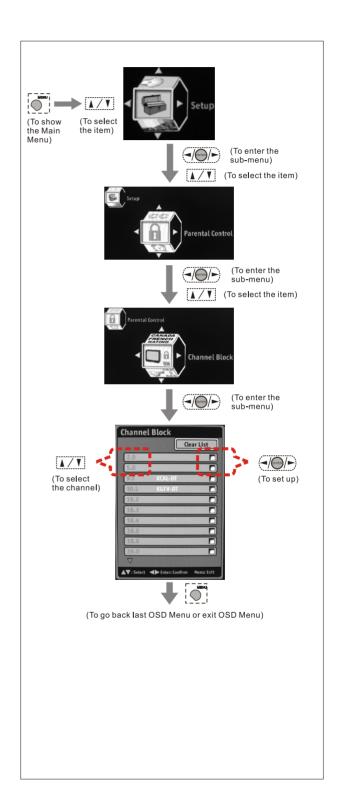

Resetting the Password

> Change Password

You may change to a new preferred password by pressing the numeric key within 6 numbers,

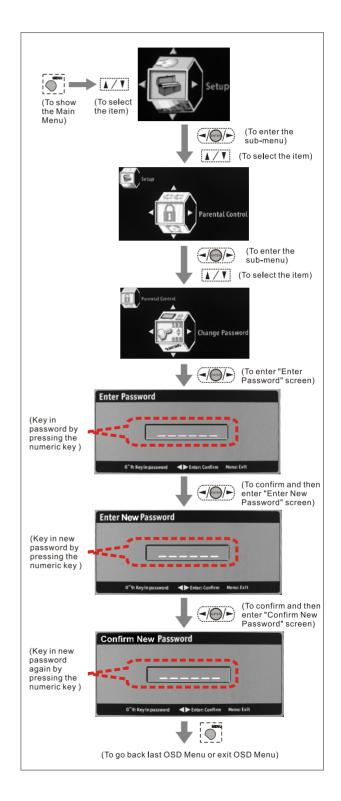

Setting the Date and Time

> Date and Time

In this Setup Index, you can setup the Date, Week, Time Zone, and Current Time on the TV.

Date:

Date is set automatically when NTSC source is used. (Manual adjustment is necessary however, if not used)

Week:

It will be automatically displayed according to the Date setting.

Time Zone:

You can select available time zone where you live.

Current Time:

Time is set automatically when NTSC source is used. (Manual adjustment is necessary however, if not used)


Daylight Savings:

Option will be selected automatically based on settings above.

Auto Calibration:

Once activating this function, the information of "Date and Time" will be corrected automatically based on accurate time.

NOTE: Once marking the "Auto Calibration" setting, all settings shown on the "Date and Time" screen will be invalid.

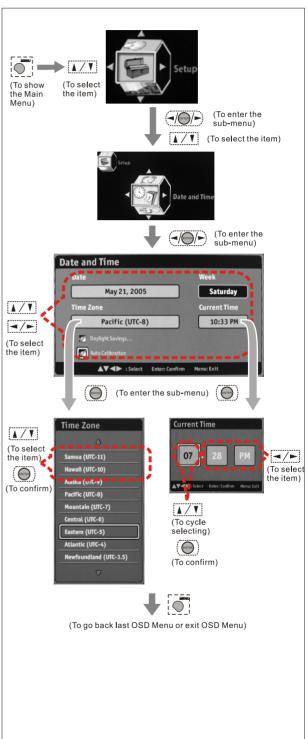

Setting the TV Timer

> Timers

In this Setup Index, you can setup the Sleep Time, Start Time, and Stop Time on the TV.

Sleep:

Shuts off TV after a preset period of time has passed by scrolling through 30, 60, 90, 120 minutes.

Timer#1:

Turns display on/off at a set time by entering Week, Start time and Stop time.

Timer#2:

You can set another unit of timer.

(NOTE: Please preset the "Date and Time" before setting the "Timer # 1 and 2" functions.)

(NOTE: If the "Timer # 1" and "Timer # 2" settings are overlap, they will be combined to be one.)


(NOTE: If the "Stop Time" is less than the "Start Time", the setting will be carried over to the next day.)

Timeout Settings for OSD Menu

Menu Timeout

In this Setup Index, you can setup the OSD Menu display time before disappeared when no action is taken.

- Press the ▲▼ button to select 10, 20, or 30 second.
- 2. Press the "ENTER" button to confirm.

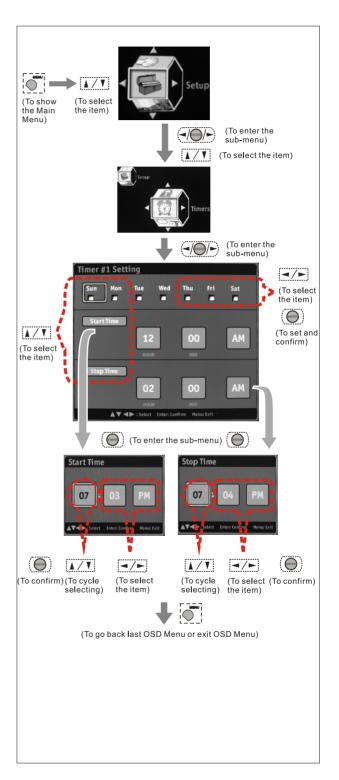

TV OSD Languages

Languages

There are three language formats available for the OSD Menu. You may select it doing the following:
English, Français, Español.

Setting DPMS

> DPMS

TV and Backlight will shut off automatically when no video source is detected when DPMS is active.

- * On- To activate this function
- * Off- To disable this function

Factory Default Option

Factory Settings

You can reset all OSD settings to original manufacture settings for all input sources.


Factory Settings by Input

You can reset all OSD settings to original manufacture settings for the source you select currently.

Displaying the Firmware Version

Firmware Version

You can see the firmware version here that installed in the HDTV unit.

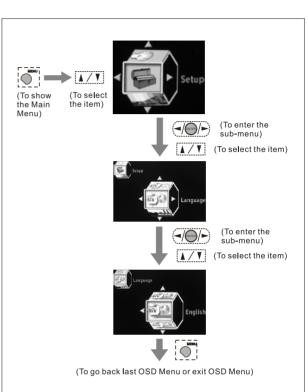

Specifications _____

TFT LCD Panel


Specifications						
Panel Size	26"	27"	32" (Bottom Speaker)	32" (Side Speaker)		
Aspect Ratio	16:9	16:9	16:9	16:9		
Pixels	1366 X 768	1366 X 768	1366 X 768	1366 X 768		
Dynamic Contrast Ratio	1600:1	1000:1	1000:1	1000:1		
H/V(View Angle)	178 · (H) / 178 · (V)	178 - (H) / 178 - (V)	176 · (H) / 176 · (V)	176 · (H) / 176 · (V)		
Gray to Gray Response	8 ms	8 ms	8 ms	8 ms		
Time						
Video/Graphic Processing						
PC Compatible Frequency	30~85 KHz(H) / 50~80Hz(V)	30~85 KHz(H) / 50~80Hz(V)	30~85 KHz(H) / 50~80Hz(V)	30~85 KHz(H) / 50~80Hz(V)		
	Max. 1360x768 @60Hz	Max. 1360x768 @60Hz	Max. 1360x768 @60Hz	Max. 1360x768 @60Hz		
Video Compatibility		NT	SC			
DTV & HDTV Compatibility		480i, 480p,	720p, 1080i			
Aspect Ratio Adjustment		Zoom, Full Sc	reen, 4:3, 1:1,			
		Panoramic				
3D Comb Filter	Υ					
3:2/2:2 Pull Down	Υ					
Digital Noise Reduction	Υ					
Adjustable Color	Native, 6500, 6500-User,					
Temperature	9300, 9300-User					
De-interlacer	Υ					
VGA Auto Frequency	Υ					
Correction						
TV Auto Frequency	Υ					
Detection	·					
Audio Processing						
Auto Sound Level Control			Υ			
Output Watt	2 (10W +10W)					
Sound Effect	MTS (Mono / Stereo / SAP)					
Input Terminals						
TV Tuner	Combo RF (NTSC/ATSC) Tuner x1					
Video Input	Composite (CVBS) x1, S-Video x1, Y/Pb/Pr, Y/Cb/Cr x1, R/L x3					
HDTV & Video Input	VGA/Component x1, HDMI x1, R/L x2					
Service Port	RS232C Port (Mini DIN 8 Pins) x1, Firmware Upgrade Port (A Type) x1					
Output Terminals						
Audio Output	Output : Earphone, R/L x1					


^{*} NOTE : Product Specification is Subject to Change without Notice.

TFT LCD Panel

Other	·s	26"	27"	32" (Bottom Speaker)	32" (Side Speaker)
Powe	r (Voltage)	100~240 VAC / 50-60 Hz	100~240 VAC / 50-60 Hz	100~240 VAC / 50-60 Hz	100~240 VAC / 50-60 Hz
	(Power Consumption)	162W	162W	164W	164W
	Stand-by	< 1W	< 1W	< 1W	< 1W
Dime	nsions (W x D x H)	33.46 in x 7.52 in x 19.56 in	33.46 in x 7.52 in x 19.56 in	31.89 in x 9.37 in x 24.60 in	37.76 in x 9.37 in x 22.2 in
Carto	n Dimensions (W x D x H)	35.82 in x 8.66 in x 23.42 in	35.82 in x 8.66 in x 23.42 in	35.43 in x 11.02 in x 27.36 in	42.80 in x 12.40 in x 25.35 in
Weigh	nt w/ stand	34,62 lbs	30.8 lbs	33.1 lbs	35.42 lbs
Gross	Weight	43.44 lbs	39.62 lbs	38,81 lbs	45.32 lbs

Dimensional Drawing





Size Model	Α	В	С	D	E	F
26"	17.48 in	33.46 in	18.90 in	7.52 in	19.56 in	4.63 in
27"	17.48 in	33.46 in	18.90 in	7.52 in	19.56 in	4.63 in
32" (Bottom Speaker)	23.60 in	31.89 in	23.58 in	9.37 in	24.60 in	4.92 in
32" (Side Speaker)	20.67 in	37.76 in	23.58 in	9.37 in	22.20 in	4.92 in

Timing Mode for VGA and DVI_____

Source	Resolution	Vertical frequency (Hz)
YPbPr	480p	59.94
	720p	60
	1080i	30
VGA	640x480	60
		75
	800 x 600	60
		75
	1024 x 768	60
		75
	1280 x 768	60
	1280 x 1024	60
	1360 x 768	60
DVI	640 x 480	60
		75
	800 x 600	60
	1024 x 768	60
		75
	1280 x 720	60
	1280 x 768	60
	1360 x 768	60

Pixels Policy_

Syntax-Brillian's D.O.A. Policy for LCD HDTVs for Defective Pixels on LCD Panels

(Applicable to the LCD HDTV sold within USA & Canada only)

Syntax-Brillian™ LCD HDTVs are evaluated at a distance of approximately 50 centimeters (approximately 20 inches) between the LCD panel and the eyes of the user at a 90 degrees viewing angle. All LCD panels have been tested to ensure they comply with our factory standards. Our evaluation is based on the number of defective pixels and the distance between any two defective pixels. Bright dots are dots that appear bright and unchanged in size when a LCD HDTV screen displays under a black pattern; dark dots are dots that appear dark and unchanged in size when a LCD HDTV screen is displayed under pure red, green, or blue patterns ("defective pixels"). Adjacent dots are dots located directly next to each other.

Customers are required to check their LCD panel immediately after purchase. To identify defective pixels, the LCD panel should be examined under normal operating conditions as mentioned above, preferably in its native display resolution, and with a 90 degrees viewing angle.

A LCD HDTV will be considered dead on arrival (D.O.A.) with regards to defective pixels on the LCD panel when any one of the following criteria is met:

- A total of 7 defective pixels including both bright dots and dark dots are present (the typical 30" LCD Television screen has 16.7 million pixels), or
- 2 or more pairs of adjacent bright dots are present, or
- 3 adjacent bright dots are present, or
- 3 adjacent dark dots are present.

In view of customers' concerns about dead pixels, Syntax-Brillian™ would like to address that defective pixels are not ultimately avoidable with the current LCD industry standard panel manufacturing processes. We always strive to improve our technology and minimize the chance of occurrence of defective pixels by applying strict screening processes in our factory production processes. However, Syntax-Brillian cannot guarantee that a return unit to our customers will be 100% free of defective pixels.

For questions, please call our toll free service number in the USA at 888-Syntax-Brillian-8.

"At Syntax-Brillian™ Groups, a satisfied customer is our most important focus."

Glossary .

3:2 pull down - Process of converting 24 frames per second film to video by repeating one film frame as three fields, then the next film frame as two fields.

1 1 1 2 2 1 1 1 2 2

480I - 480 lines of display every 1/60 of a second; image is displayed by interlace scanning. See also Interlaced

480P - 480 lines of display every 1/60 of a second; image is displayed by progressive scanning. See also Progressive.

720P - 720 lines of display every 1/60 of a second; image is displayed by progressive scanning. See also Progressive.

1080I - 540 lines of display x 2 every 1/30 of a second; image is displayed by interlace scanning. See also Interlaced

16:9 - Aspect ratio under Hi Def. and theater movie formats. Also known as widescreen; see Aspect Ratio

4:3 - Aspect ratio under SDTV; see Aspect Ratio

Active Matrix TFT (Thin Film Transfer) - A type of display technology where the three primary colors are modulated. Results in better contrast ratios suitable for video.

Alarm - Feature on the Syntax-Brillian Olevia models. Allows the unit to power on from the stand by mode.

Alarm Time - Time specified as to when the unit will power on. See Alarm.

Aspect Ratio - The ratio of an image according to the width and height of a picture.

ATSC - Advanced Television Systems Committee; international, non-profit organization that is committed to developing standards for digital television.

Reference: http://www.atsc.org

Bezel - Refers to the plastic or metal frame that acts like a shell around the LCD glass.

Backlight - Refers to the component, that lights up the LCD display.

Balance - Feature on the OSD for the Syntax-Brillian Olevia models that adjust the left and right sound output from the speakers.

Background - Feature on the OSD for the Syntax-Brillian Olevia models, which allows the user to change the OSD background, display to transparent or opaque.

Brightness - The measurement of color that is illuminated. Colors range from black to white.

CATV - Community Antenna Television (Cable Television)

Channel Favorite - Feature on the OSD for the Syntax-Brillian Olevia models that allows the user to scroll through a defined list of channels that the user sets up.

Channel Edit - Feature on the OSD for the Syntax-Brillian Olevia models that allows the user add or delete a channel.

Channel Source - Feature on the OSD for the Syntax-Brillian Olevia models that lets the user select the source of their channels. Select TV for antennae or CATV for cable television.

Channel Auto Scan - Feature on the OSD for the Syntax-Brillian Olevia models that when initiated, will determine which channels are available and which are not. If a desired channel is not accessible, you can add the channel in manually. See Channel Edit.

Channel Fine Tune - Feature on the OSD for the Syntax-Brillian Olevia models that enables the user to tune the channel for better reception.

Chroma - (Chrominance) Refers to the color characteristics of a video signal.

CC - Closed Caption

Color - The term refers to the amount of color present. This varies between each user, as each person perceives colors differently.

Color Temperature - Feature on the OSD for the Syntax-Brillian Olevia models that enables warm, normal or cool color settings. Warm emphasizes red, cool emphasizes blue, and normal doesn't emphasize any of the primary colors. This setting may affect each person individually depending on how color is perceived.

Comb Filter - A filtering system designed to removal unwanted artifacts by rejecting certain frequencies while permitting others.

Component - A three RCA type input that uses high quality cables (one for brightness, and two for color). Process increases bandwidth resulting in more color information to be carried to the TV producing a more accurate picture.

Composite - Also known as CVBS, Technology that permits the combination of color information and brightness under one wire. A single video signal that carries both brightness and color information are contained in a single wire.

Contrast - Difference in luminance between the white and black colors.

CRT - Cathode Ray Tube.

DB15 - Also referred to as VGA; See VGA

De-Interlace - Process of converting an interlaced video signal.

Display Area - The perimeter of the LCD glass the image is displayed on. See Video Resolution **Dual Link** - See Single Link; Supports a maximum bandwidth of 2×165 MHz (1920×1080 @ 60 Hz, 1280×1024 @ 85 Hz).

DVI - Digital Video Interface Describes the technology that is used to take full advantage of a signal when paired with a high-end video card and flat panel displays

DVI-A - Digital Video Hi-Resolution Analog

DVI-D - Digital Video Interface Digital; Cable is used for direct connection from one digital source to the TV; See DVI

DVI-I - Digital Video Interface Integrated; Cable that supports analog and digital signals; See DVI

DTV - Digital Television

Factory Default - Feature on the OSD for the Syntax-Brillian Olevia models that resets all menu options to factory default.

F-Connector - The standard connector found on video equipments that coaxial cables connect to.

Flat-Panel Display - ultra thin displays, usually found in notebooks are now entering the TV appliances sector as new technology enables wider/larger screens.

Frame - A complete picture that includes both even and odd lines. 30 video frames are present in 1 second.

Gain - Describes the amplification level of a particular signal.

HDCP - High bandwidth Digital Content Protection

HDTV - 1.High Definition Television 2. Designates as the unit having a built in ATSC tuner to decode High Definition signals (720P/1080I).

HD-Ready - A unit that supports the High Definition displays (720P/1080I) with the help of a Set-Top Box. **Horizontal Resolution** - Refers to the number of vertical black and white lines defined along a horizontal line.

IR - Infrared

Input - term used in the On Screen Display

Interlaced - Images are the result of lines of data reassembled. Interlaced refers to the process of an image's odd lines reassembled from top to bottom taking about 1/60 of a second, before reassembling the even lines which results in a full picture. Antonym: Progressive

Language - Feature on the OSD for the Syntax-Brillian Olevia models that enables the OSD to be read in different languages.

LCD - Liquid Crystal Display

LCoS - Liquid Crystal on Silicon

LED - Light Emitting Diode

Luminance - refers to the brightness of an image.

Lux - 1 Lux = 1 footcandle; measurement of brightness

Moire - A visual illusion in which a succession of parallel curved lines produces a pattern to the naked eye, but does not really exist. Otherwise known as the moire effect.

NCTA - National Cable Television Association

Noise reduction - Feature on the OSD for the Syntax-Brillian Olevia models that enables channels from the tuner box to reduce noise displayed on the LCD unit.

NTSC - National Television systems Committee

OSD - On Screen Display; brought up by pressing the menu button on the TV or the Remote.

Over Scanning - An image displayed is larger than the display area

PAL - Phase Alternating Line

Parental Control - The ability to block access to specified content from an unsuitable audience.

PIP - Picture in Picture; feature that enables one source to be displayed on top of another source.

Pixel Resolution - Refers to the number of rows horizontal and vertical that produces the image.

PIP - Picture in Picture; Allows an image to be displayed in front of another image.

Plug and Play - Describes the hardware or software that is installed and does not require any configuration before using.

Progressive - An image or lines of data that is reassembled from top to bottom sequentially.

Antonym: Interlaced

RGB - Red, green & blue These primary colors provide the basis for many different colors.

Refresh Rate - Refers to the maximum number of frames that the monitor can display per second. Usually measured in hertz.

Saturation - The amount of a particular color present in an image.

SCART - An industry standard for interconnecting audio-video equipment developed by Peritel. Usually associated with PAL video equipment.

SDTV - Standard Definition Television usually in 480I/P format.

SECAM - Sequential Color with Memory or Sequential Couleur Avec Memoire

Set-Top-Box - box that is capable of receiving and decoding digital transmissions (i.e. High Definition Cable Box, Digital Cable box).

Sharpness - Tries to artificially enhance the edges of a picture.

Single Link - supports a maximum bandwidth of 165 MHz

(1920 x 1080 @ 60 Hz, 1280 x 1024 @ 85 Hz).

Split screen - Feature that places two images side by side.

1	2

Swap - Button featured on the Olevia remote. Used in the POP3 or PIP12 views to swap the sub viewable boxes with the main viewable box.

Tint - Adjusts the whiteness level within the color. Similar to Hue.

Under- scanning Term used where the image displayed is smaller than the display area.

Up convert - Process of converting a 480P/I signals to 720P or 1080I.

V-Chip - Chip that controls access to forbidden content specified by an adult.

VGA - 1. Video Graphics Array (DB15) 2.

Video Display - Refers to the display resolution

Video Resolution

Aspect R	Aspect Ratio 4:3		atio 16:9
VGA	640 x 480	WXGA	1280 X 800
SVGA	800 x 600	SXGA	1280 X 1024
XGA	1024 x 768	WXGA+	1400 X 1050
QVGA	1280 x 960	WSXGA	1680 X 1050
SXGA+	1400 x 1050	WUXGA	1920 X 1200
UXGA	1600 x 1200	QSXGA	2560 X 2048
QXGA	2048 x 1536		
QSXGA+	2800 x 2100		
QUXGA	3200 x 2400		

QUXGA 3200 x 2400

Viewable Angle - Angle at which the screen is still viewable.

Widescreen - See 16:9

YCbCr - Used often with standard interlaced video equipment. See Component

YPbPr - Used often with progressive video equipment. See Component

Code Number Lists for Remote Control_____

	TV
Manufacturer	Code
Syntax-Brillian (OLEVIA) 3 Series 5 Series 7 Series	0000 (Remote Default)
Syntax-Brillian (OLEVIA) HVE Series HVM Series HVS Series HVX Series HVX Series DLT-2711M DLT-3212M DLT-3712 LT27HV LT30HV LT32HV LT27HVS LT30HVS LT30HVS LT30HVK LT30HVK LT30HVK	0001

DVD				
Manufacturer Code				
Aiwa	2073			
Apex	2000	2001	2003	
	2004	2016	2028	
	2029	2030		
Audiovox	2074			
Blaupunkt	2078			
BOSE	2062	2071		
Broksonic	2045			
Cherry	2025			
Clarion	2046			
Classic	2047			
Daewoo	2079	2080	2113	
Denon	2075	2095	2096	
Emerson	2048	2049		
Fisher	2050	2076		
Funai	2049	2064		
GE	2005	2051	2102	
Go Video	2068	2070		
GPX	2052			
Great Wall	2101			

DVD			
Manufacturer		Code	
Harman Kardon	2114		
Hitachi	2065	2067	
Irradio	2092		
JVC	2007	2010	2011
	2012	2013	
Kenwood	2097	2100	
Koss	2093		
Magnavox	2020	2035	
Marantz	2085		
Memorex	2087		
Mintek	2053		
Mitsubishi	2088	2089	2090
	2091		
NAD	2048	2081	
Nakamichi	2054		
Norcent	2055	2056	
Onkyo	2082	2086	
Oritron	2057		
Panasonic	2008	2036	2037
Philips	2002	2009	2021
	2022	2023	2043
Pioneer	2027		
Polaroid	2111		
Proscan	2005	2099	
Qwestar	2057		
RCA	2005	2024	2038
	2110		
Sampo	2058		
Samsung	2006	2017	2033
	2041		
Sansui	2060		
Sanyo	2059	2063	
Sharp	2014	2031	
Sherwood	2061		

DVD				
Manufacturer Code				
Sony	2015	2018	2034	
	2039			
Sylvania	2049	2072	2077	
Techwood	2083			
Toshiba	2019	2026	2040	
	2042			
Yamaha	2084	2098		
Zenith	2069	2094		

нтів			
Manufacturer		Code	
BOSE	2071		
Onkyo	2086		
RCA	2105		

DVD / VCR Combo			
Manufacturer Code			
Go Video	2068	2070	
Hitachi	2067		
JVC	2010		
Polaroid	2111		
Samsung	2017		
Sanyo	2063		
Zenith	2069		

DVD Recorder			
Manufacturer	Code		
Irradio	2106		
Panasonic	2103		
Philips	2107		
Pioneer	2104		
RCA	2105		
Sony	2108		
Yamaha	2109		

TV / DVD / VCR Combo			
Manufacturer		Code	
Samsung	2041		
Sylvania	2072		
Toshiba	2040		

Portable DVD				
Manufacturer		Code		
CyberHome	2112			

TV / DVD Combo			
Manufacturer	Manufacturer Code		
Aiwa	2044		
Apex	2016		
Broksonic	2045		
JVC	2011		
Sansui	2060		
Toshiba	2042		

Amplifier			
Manufacturer	Code		
Kenwood	5048		
Pioneer	5041		
RCA	5069		
Yamaha	5001	5053	

AUDIO			
Manufacturer	Code		
Cambridge	5011		
Ibiza	5037		

Digital Audio Tape			
Manufacturer		Code	
Sony	5043		

Audio Cassette			
Manufacturer		Code	
Aiwa	5039		
Curtis Mathes	5041		
Denon	5052		
Fisher	5042	5049	
GE	5070		
Kenwood	5048	5056	
NAD	5040		
Nakamichi	5054		
Onkyo	5055		
Optimus	5041	5047	
Panasonic	5015	5050	
Philips	5013		
Pioneer	5018	5041	5045
Proscan	5070		
Quasar	5050		
Radio Shack	5047		
RCA	5070		
Sansui	5057		
Sanyo	5044		
Sherwood	5047		
Sony	5043		
Technics	5050		
Yamaha	5053		

нтів			
Manufacturer		Code	
BOSE	5010		
Philips	5022		

Receiver / Amplifier			
Manufacturer		Code	
Yamaha	5001		

Audio System			
Manufacturer		Code	
Aiwa	5039		
Carver	5051		
Curtis Mathes	5041		
Denon	5052		
Harman Kardon	5046		
Kenwood	5048	5056	
Nakamichi	5054		
Panasonic	5015	5016	
Philips	5013	5014	
Pioneer	5018	5041	
RCA &	5031	5032	5033
Dimensia	5034	5035	
Sansui	5057		
Sanyo	5044		
Scientific Atlanta	5067		
Sony	5043		
Technics	5050		
Yamaha	5053		

Phono			
Manufacturer		Code	
Kenwood	5048		
Pioneer	5041		
Sony	5043		
Yamaha	5053		

DVR			
Manufacturer	Code		
Philips	1042		
RCA	1116		
RePlay	1115		
Tivo	1116		

Rece	Receiver / Tuner				
Manufacturer	Manufacturer Code				
Aiwa	5017	5036	5039		
BOSE	5010				
Carver	5051				
Curtis Mathes	5041				
Denon	5006	5026	5027		
	5052				
Fisher	5042	5044	5049		
Gradiente	5062				
Harman Kardon	5008	5038	5046		
Hitachi	5059				
JBL	5038				
Jensen	5061				
JVC	5007	5030			
Kenwood	5005	5028	5048		
	5056				
Luxman	5064				
McIntosh	5058				
NAD	5040				
Nakamichi	5054				
NEC	5040				
Nikko	5063				
Onkyo	5055				
Optimus	5041	5047			
Panasonic	5009	5012	5016		
	5029	5050			
Philips	5014	5022			
Pioneer	5004	5023	5041		
	5045				
Quasar	5050				
Radio Shack	5047				
RCA	5071	5072			
Sansui	5057				
Sanyo	5042	5044			
Sharp	5060				
Sherwood	5047				

Receiver / Tuner			
Manufacturer Code			
Sony	5024	5043	
Technics	5002	5020	5050
Yamaha	5048	5053	
Zenith	5065		

TV / VCR Combo			
Manufacturer		Code	
Action	1102		
Broksonic	1023	1106	
Daewoo	1014		
Emerson	1106		
GE	1040	1081	1087
Goldstar	1090		
Hitachi	1036	1037	
JVC	1019		
Panasonic	1002	1020	1090
Philips	1018		
Precision	1102		
Quasar	1090		
RCA	1012	1016	
Realistic	1105		
Samsung	1029	1035	
Sharp	1015		
Sony	1007		
Sylvania	1030		
Toshiba	1010		
Zenith	1038	1090	

DVD / VCR Combo			
Manufacturer		Code	
Go Video	1026	1028	
Hitachi	1025		
JVC	1000		
Samsung	1031		
Sanyo	1022		
Zenith	1027		

TV / VCR Tuner Combo				
Manufacturer Code				
Panasonic	1009			

TV / DVD / VCR Combo				
Manufacturer		Code		
Samsung	1039			
Sylvania	1032			
Toshiba	1011			

PVR			
Manufacturer		Code	
Tivo	1111		

VCR			
Manufacturer		Code	
Admiral	1073	1074	1101
Adventura	1055		
Aiko	1056		
Aiwa	1055		
Akai	1044	1045	1068
	1069	1080	1093
American High	1053		
Asha	1050		
Audio Dynamics	1046	1047	
Audiovox	1051		
Beaumark	1049	1050	1079
Bell & Howell	1048		
Broksonic	1023	1049	
Calix	1051		
Candle	1050	1051	1052
	1079	1083	1090
	1092	1095	1102
Canon	1053	1054	
Capehart	1067	1083	
Carver	1060	1110	
CCE	1056	1059	
Challenger	1001		

VCR				
Manufacturer Code				
Citizen	1050	1051	1052	
	1056	1095		
Colortyme	1046	1096		
Colt	1059			
Craig	1050	1051	1059	
	1085	1090	1105	
Criterion	1085			
Curtis Mathes	1043	1046	1050	
	1053	1054	1077	
	1079	1112		
Cybernex	1050			
Daewoo	1014	1052	1055	
	1056	1067	1083	
	1102			
Daytron	1067	1083	1102	
DBX	1046	1047		
Denon	1088			
Dimensia	1043	1112		
Dixon	1013	1103		
Dynatech	1055			
Electrohome	1051	1090		
Electrophonic	1051			
Emerson	1044	1049	1051	
	1052	1053	1055	
	1061	1069	1087	
	1090	1106		
Fisher	1048	1089	1105	
Fuji	1045	1053		
Funai	1055	1095	1113	
Garrard	1055			
GE	1040	1043	1050	
	1053	1054	1070	
	1079	1112		

VCR					
Manufacturer	Manufacturer Code				
Go Video	1021	1024	1026		
	1028	1079	1081		
	1085	1086			
Goldstar	1046	1051	1079		
	1090	1092			
Gradiente	1055	1090			
Harley Davidsor	1055				
Harman Kardon	1046	1110			
Harwood	1059				
Headquarter	1048				
Hitachi	1025	1036	1037		
	1057	1058	1065		
	1068	1070	1088		
Homeline	1090				
Instant Replay	1053				
JBL	1098				
JC Penney	1046	1047	1048		
	1049	1050	1051		
	1053	1054	1057		
	1058	1059	1060		
	1065	1079	1085		
	1088	1090			
JCL	1053				
Jensen	1057	1058	1068		
JVC	1000	1019	1046		
	1047	1048	1068		
	1071	1087	1088		
Kenwood	1046	1047	1048		
	1068	1071	1077		
KLH	1059				
Kodak	1051	1053			
LG	1051				
Lloyds	1077	1095	1105		
Lloyd's	1055				
Logik	1059	1085			

VCR				
Manufacturer Code				
LXI	1051			
Magnasonic	1085	1090	1102	
Magnavox	1008	1053	1054	
	1060	1064	1085	
	1110			
Magnin	1051	1079		
Marantz	1046	1047	1048	
	1053	1060	1077	
	1092	1110		
Marta	1051	1090		
Matsushita	1053			
MEI	1053			
Memorex	1033	1048	1050	
	1051	1053	1055	
	1064	1073	1074	
	1088	1090	1091	
	1097	1105	1114	
MGA	1061	1069		
MGN	1079			
MGN Technology	1050			
Midland	1095			
Minolta	1057	1058	1065	
	1088			
Mitsubishi	1003	1005	1006	
	1057	1058	1061	
	1069	1071	1090	
Montgomery Ward	1073	1074		
Motorola	1053	1073	1074	
мтс	1050	1085		
Multitech	1050	1055	1059	
NEC	1046	1047	1048	
	1068	1071	1077	
	1092			
Nikko	1051			
Noblex	1050			

VCR					
Manufacturer	Manufacturer Code				
Olympus	1053				
Optimus	1051	1073	1074		
	1090	1094			
Optonica	1062				
Orion	1087	1090	1106		
	1114				
Panasonic	1002	1004	1009		
	1020	1053	1054		
	1066	1085	1105		
Pentax	1057	1058	1065		
	1070	1077	1088		
Philco	1053	1054	1060		
	1088	1106			
Philips	1017	1018	1053		
	1060	1062	1110		
Pilot	1051				
Pioneer	1047	1057	1071		
	1075	1078	1104		
Portland	1067	1083			
Proscan	1043	1112			
Protec	1059				
Proton	1085				
Pulsar	1064	1079	1095		
	1102				
Quarter	1048				
Quartz	1048				
Quasar	1053	1054			
Radio Shack	1051	1062	1074		
	1090				
Radio Shack /	1048	1050	1051		
Realistic	1053	1054	1055		
	1062	1073			
Radix	1051				
Randex	1051				

VCR					
Manufacturer	Manufacturer Code				
RCA	1012	1016	1043		
	1044	1050	1053		
	1057	1058	1065		
	1070	1078	1079		
	1088	1107	1108		
	1112				
Realistic	1048	1050	1051		
	1052	1053	1054		
	1055	1062	1073		
	1074	1079	1090		
	1094	1097	1105		
Ricoh	1072	1076			
Runco	1064				
Samsung	1029	1031	1035		
	1039	1050	1052		
	1079	1095			
Sanky	1064	1073	1074		
Sansui	1047	1068	1071		
	1085	1114			
Sanyo	1022	1048	1050		
	1089	1097	1105		
Scott	1049	1052	1061		
	1090				
Sears	1048	1051	1053		
	1057	1058	1065		
	1077	1088	1089		
	1090	1097	1105		
Sharp	1015	1062	1073		
	1074	1091	1094		
	1101				
Shintom	1045	1058	1059		
	1085				
Shogun	1050				
Signature	1073	1074			
Signature 2000	1097	1101			

VCR				
Manufacturer Code				
Singer	1053	1059	1072	
	1076	1085		
Sony	1007	1045	1063	
	1080	1082	1084	
	1098	1099		
STS	1053	1065		
Sylvania	1030	1032	1053	
	1054	1055	1060	
	1061	1110		
Symphonic	1055	1077	1095	
	1105	1113		
Tandy	1048			
Tashiko	1051			
Tatung	1068			
Teac	1055	1068	1107	
Technics	1053	1066		
Teknika	1051	1053	1055	
	1090			
тмк	1050			
Toshiba	1010	1011	1052	
	1057	1061	1069	
	1100	1102	1105	
	1109			
Totevision	1050	1051	1090	
Unitec	1095			
Unitech	1050			
Vector Research	1046	1047	1052	
	1077			
Wards	1050	1051	1052	
	1053	1055	1057	
	1058	1059	1062	
	1065	1073	1074	
	1079	1090	1091	
	1094	1105	1108	
	1110			

VCR				
Manufacturer		Code		
Victor	1047			
Video Concepts	1046	1047	1052	
	1069	1077		
Videosonic	1050			
White Westinghouse	1095	1113		
XR 1000	1085			
XR-1000	1053	1055	1059	
Yamaha	1046	1047	1048	
	1068	1077		
Zenith	1027	1038	1045	
	1064	1072	1076	
	1093			

Satellite				
Manufacturer Code				
BSB	3003			
Directtv	3001			
Echostar	3049	3051	3052	
	3053			
GE	3046			
Hitachi	3045			
Hughes	3043	3047		
Mitsubishi	3002			
Panasonic	3036			
Philips	3000			
Proscan	3038	3044		
RCA	3037	3039		
Sony	3040	3042		
SuperDish	3025			
Uniden	3041			
Alphastar	3028			
Chaparral	3024			
DIRECTV	3048			
Drake	3027			
Echostar	3026			

Satellite						
Manufacturer	Manufacturer Code					
Express Vu	3030					
Fujitsu	3022					
GE	3004	3032	3033			
General Instruments	3018	3019				
Hitachi	3023					
Hughes	3023	3048				
Hughes Network	3048					
Hughes Network	3048					
Janeil	3022					
JVC	3015					
Panasonic	3005	3011				
Proscan	3032	3033				
Radio Shack	3018	3019				
RCA	3032	3033				
Realistic	3014					
Rural Cable	3018					
Samsung	3006	3028				
Sony	3007					
Star Choice	3031					
Star Trak	3021					
STS	3020					
Toshiba	3008	3029				
Uniden	3016	3017				
Video Pa ll	3022					
Zenith	3009	3022				

Satellite Receiver / Recorder				
Manufacturer Code				
Philips 3012				

SAT-DVR			
Manufacturer Code			
DISH Network	3050		
RCA	3010		
Sony	3035		
Zenith	3013		

Cable Box				
Manufacturer		Code		
ABC	4000	4001	4002	
	4030			
Antronix	4004			
Archer	4007			
Cabletenna	4004			
Cableview	4003			
Colour Voice	4009	4010		
Contec	4034			
Eastern	4035			
GE	4000			
Gemini	4012	4013		
General Instrument	4050			
General Instruments	4000	4032		
Hamlin	4036	4037	4038	
	4040	4044		
Hitachi	4000			
Jerrold	4000	4012	4015	
	4016	4026	4030	
	4032			
Motorola	4031	4051	4052	
Movie Time	4039			
NEC	4033			
NSC	4039			
Oak	4034	4041		
Panasonic	4027	4029		
Philips	4009	4010	4011	
	4013	4018	4019	
	4020			
Pioneer	4021	4022	4045	
Proscan	4000			
RCA	4003	4029	4032	
Regal	4038	4044		
Regency	4035			
Rembrandt	4000			

Cable Box					
Manufacturer :	Code				
Samsung	4022				
Scientific Atlanta	4002	4023	4024		
	4025	4048			
Signal	4012				
Signature	4000				
Sony	4049				
Sprucer	4029				
Standard Component	4042	4043			
Starcom	4012	4030			
Stargate	4012				
Starquest	4012				
Tocom	4001	4015			
Tusa	4012				
TV86	4039				
Unika	4004				
United Cable	4030				
Universal	4004	4007			
View Star	4034	4039			
Zenith	4028				