

Adjustable Mount
Model 75W A-8330A

What ' s the function?

Adapts the hole spacing of the infinitely adjustable 75 Series OmniMount to the attachment hole spacing of the lightweight JBL® 8330A plastic cabinet speaker.

What makes it so easy to install?

Quick four-phase installation by one technician.

1. Surface mounting bracket attaches with three lag screws into wood studs or framing members.
2. Adapter attaches to the back of the speaker.
3. OmniMount suspension arm assembly is placed in wall bracket and secured with lock nut.
4. Speaker assembly is placed on ball mount and tightened at the desired angle of adjustment. Panning angle fixed by tightening locknut. Vertical angle adjusted by loosening/tightening locknut on clamp with hex key.

What ' s the rated load?


Mounts objects up to 25 lbs. on walls.

Where and how would I use it?

- JBL® 8330A Plastic cabinet Surround Speaker (19 lbs.)
- JBL® 8330A is prepped by JBL for the OmniMount 100WA.
- Any lightweight speaker up to 25 lbs. with 100WA hole pattern.
- Adapter allows use of 75WA... Rated capacity more than adequate (25 lbs.) This mount provides a lower cost

Why did OmniMount create Utility Hardware?

- The original, highly adjustable, OmniMount clamp-and-ball assembly is a "do-everything" product-- for many applications, just what you need.
- Utility Hardware gives you *only* what you need for applications where functions can be more limited.

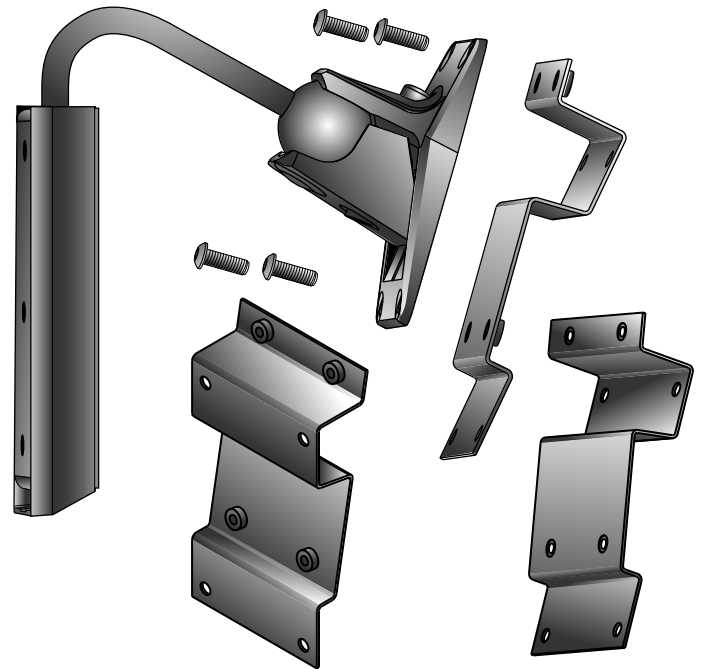


OmniMount ' s Utility Hardware provides ...

- Highly engineered design-- exceeds industry load standards. Testing data available on request.
- Efficient material use means mounts that weigh less.
- High levels of quality and safety: high load ratings.
- Simple, fast installation.
- Extremely competitive overall cost.

The total package equals superior value!

Adjustable Mount Model 75W A-8330A

Note: Secondary Support Cables are available in various lengths and configurations. See Price List for details.

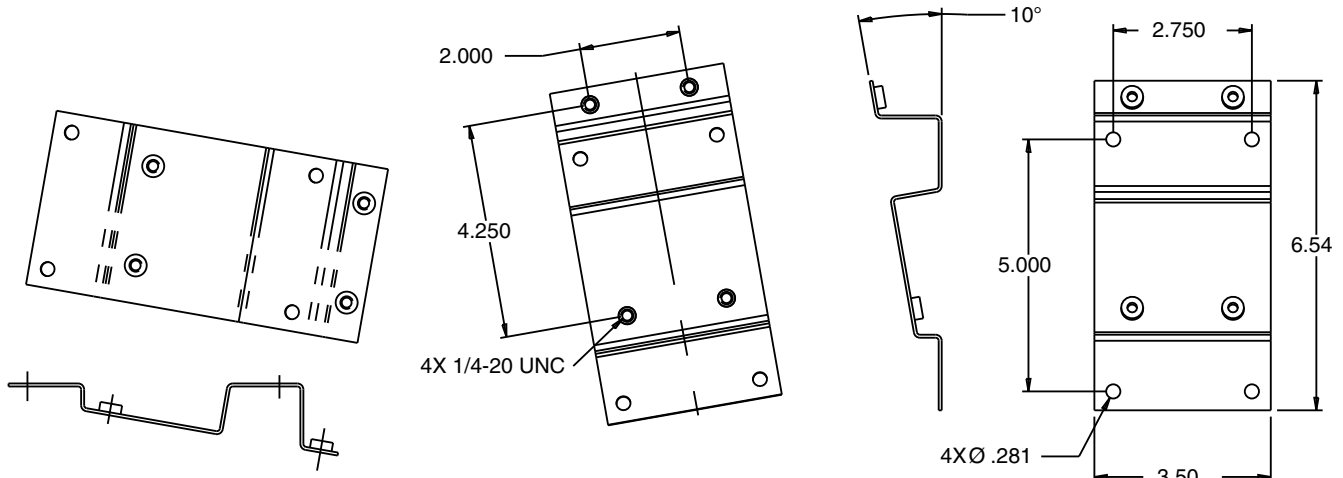

Specifications subject to change without notice

Architectural Specifications

Description: OmniMount Systems Utility Hardware, Model 75WA-8330A

Material: Adapter plate shall be fabricated sheet steel. Clamp/Jaw assembly shall be cast aluminum. Tube/Ball assembly shall be the OmniMount proprietary polymer material cast onto heavy gauge steel tubing.

Finish/Color: Fabricated components shall be deburred prior to application of black powder coat or baked finish.

Load Rating: Shall be up to 25 lbs. for wall installations and 25 lbs. for ceiling installations

Testing: Shall be tested to exceed the requirements of UL® Standard 1678.

Net Weight Each Unit: 2.25 lbs.

OMNIMOUNT® SYSTEMS
UTILITY
HARDWARE

Key Points of Competitive Difference OmniMount Products vs The Competition

Quality and Safety Testing

- An industry benchmark... All OmniMount metal mount components are deburred and powder coated. Tubular parts with an attached polymer ball are finished with a heavy-duty baked-on paint.
- All OmniMount products are tested in accordance with UL® Standard 1678 to exceed a minimum of four times the rated load. In many cases where we actually exceed this standard, our working load rating is based on many other factors, including field use information accumulated over years of practice by our broad customer base including contractors and professional installers.
- We are so confident of our total quality that we invite and welcome direct comparisons.

Packaging, Shipping, Weight and Freight

- Best packaging in the industry to ensure that products arrive clean and complete to the job site and stay complete until installation... We will also support special packing needs that work with your project flow.
- OmniMount's Utility Hardware maximizes functionality and safety while minimizing weight. The reduced weight reduces freight cost and makes installation easier. Drop-shipping to specific job sites is available.
- We have found some of our competitors' hardware to be excessively heavy for the task (Heavier is not necessarily better, stronger or safer). If you use over-designed mounts you will often pay a penalty in higher component cost, higher shipping cost and slower installation. All this adds up to a higher total cost of installation.

OmniMount's mission is to provide complete mounting solutions, not just mounting brackets.

Item # 1000258

Manufacturers and Marketers

- Many of our competitors outsource fabrication to job shops without fabricating anything themselves. This adds more cost with less control of quality. We design, engineer, test and manufacture in our own facility. OmniMount has made significant investments in people, facilities and equipment to be the leader in the mounting business for the "long haul."
- OmniMount is a real manufacturer, not just a marketer. In addition to standard products, our design experience and factory engineering support mean rapid response to your needs for application help as well as any requirements for customization.

The "Industry Standard"

- The OmniMount standard for hole center spacing has been adopted by major speaker manufacturers as well as our competitors. Without actually stating it, most of our competitors acknowledge that OmniMount is the industry standard for mounting speakers.

Communication and Customer Service

- We have digital and voice communications that support the coordination and efficiency of the entire business process from end-to-end... Sales... Customer Service... Scheduling... Production... Shipping... Technical support... Electronic Data Interchange.



OMNIMOUNT®
SYSTEMS



OmniMount Systems, Inc.
The Pointe at South Mountain
8201 South 48th Street
Phoenix, Arizona 85044-5355
Voice: 480.829.8000 Fax: 480.756.9000
email: hdqrs@omnimount.com

