





ST-MP

ST WITH OPTIONAL MOUNTING PLATE



ST-PA

ST WITH OPTIONAL PIPE ADAPTER

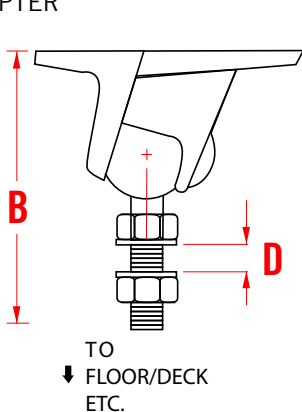

TECHNICAL SPECIFICATIONS

(Model number indicates weight capacity of the model in pounds)

20.5 ST

A	3 7/8"	98.40mm
B	3 7/8"	98.40mm
C	4 3/4"	120.70mm
D	1/2"	12.70mm

30.0 ST

A	4 5/8"	117.50mm
B	4 1/2"	114.30mm
C	5 3/4"	146.10mm
D	1/2"	12.70mm

60.0 ST

A	6 1/8"	155.80mm
B	6.00"	152.40mm
C	7 1/4"	184.20mm
D	1/2"	12.70mm

120.0 ST

A	7.00"	177.80mm
B	7.00"	177.80mm
C	8 1/4"	209.60mm
D	3/4"	19.10mm

240.0 ST

A	11 1/4"	285.80mm
B	10 3/8"	263.50mm
C	12.00"	304.80mm
D	1.00"	25.40mm



Shown with optional mounting plate.

The ST (and STX) Mounts are the most flexible of the Professional OmniMounts and are extraordinary problem solvers. If the enclosure is strong enough, ST mounts can be attached to any surface and provide a strong, flexible mount to provide coverage under the most challenging circumstances.