


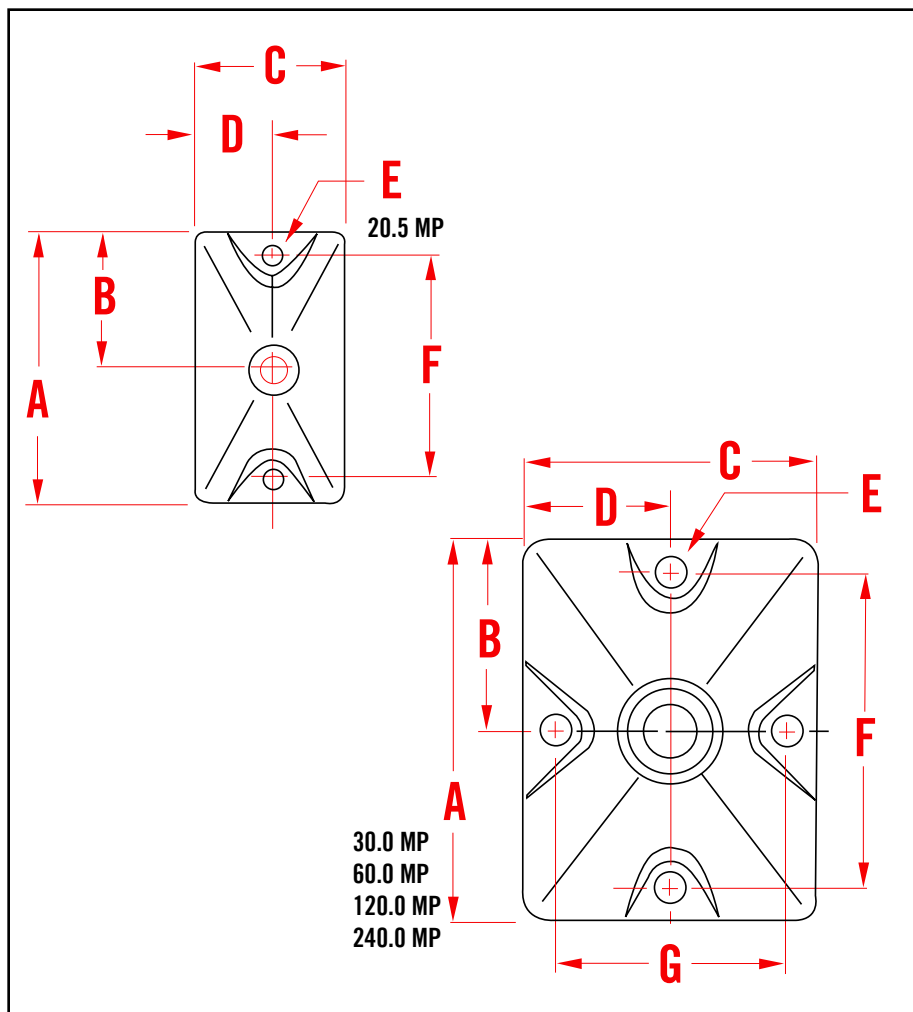

TECHNICAL SPECIFICATIONS

(Model number indicates weight capacity of the model in pounds)

20.5 MP

A	3 3/16"	81.00mm
B	1 19/32"	40.50mm
C	2 1/4"	57.20mm
D	1 1/8"	28.60mm
E	1/4"	6.40mm
F	2 9/16"	65.10mm
G	NA	NA

30.0 MP

A	4 1/4"	108.00mm
B	2 1/8"	54.00mm
C	3 5/16"	84.10mm
D	1 5/8"	41.30mm
E	5/16"-3/8"	7.90-9.50mm
F	3 1/2"	88.90mm
G	2 5/8"	66.70mm

60.0 MP

A	4 1/4"	108.00mm
B	2 1/8"	54.00mm
C	3 5/16"	84.10mm
D	1 5/8"	41.30mm
E	5/16"-3/8"	7.90-9.50mm
F	3 1/2"	88.90mm
G	2 5/8"	66.70mm

120.0 MP

A	6 7/8"	174.60mm
B	3 7/16"	87.30mm
C	4 7/8"	123.80mm
D	2 7/16"	61.90mm
E	3/8"	9.50mm
F	5 3/4"	146.10mm
G	4.00"	101.60mm

240.0 MP

A	12.00"	304.10mm
B	NA	NA
C	12.00"	304.10mm
D	NA	NA
E	NA	NA
F	NA	NA
G	NA	NA

Note: Mounting plate for 240.0 is designed differently from example shown.