


ProntoPro TSU6000



Home Theater Control Panel with Color LCD Touchscreen Display!

- Large, high-resolution **color LCD display**
 - *Dynamic, touch screen display with bright backlight and 256 color palette*
- Unique, intuitive and fully customizable **graphical user interface**
- **8MB** of flash memory for larger configuration files
 - *Easy to program and save commands in non-volatile memory*
- Total control of **IR** based consumer electronics products
- **RF** (radio frequency) for multi room control using optional RF extender
- Built-in **universal database** with pre-installed codes for over 500 brands in 15 device categories with user friendly on-screen setup
- Pick up sensor that activates screen
- Virtually unlimited macro functionality
- Recharging dock with NiMH battery pack included

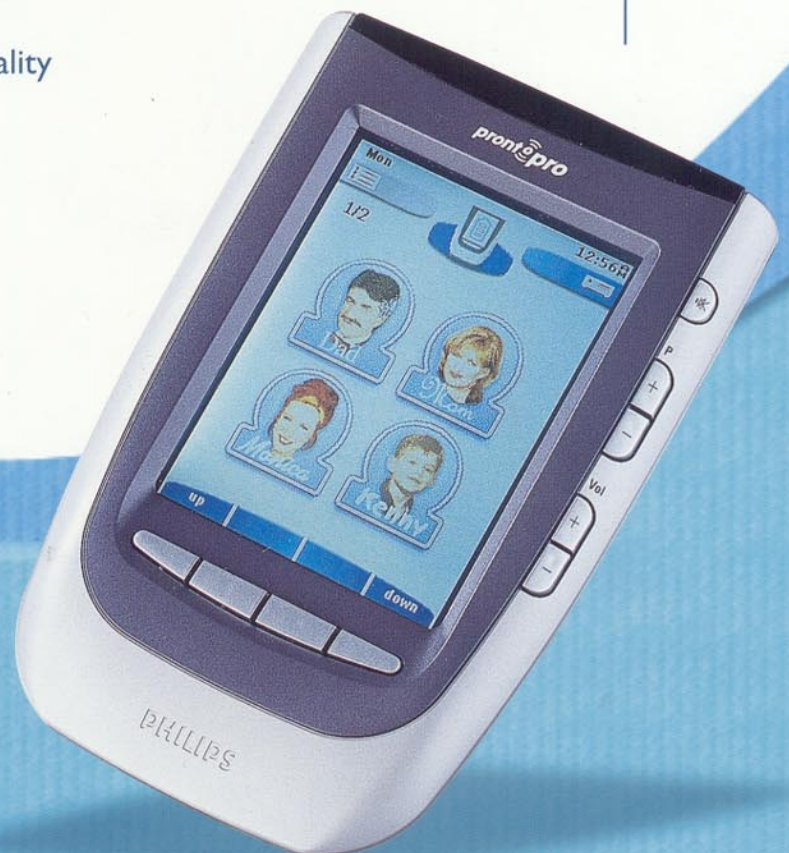

ProntoPro TSU6000



Home Theater Control Panel

The **cutting-edge design** reflects the elegance, flexibility and customization of the ProntoPro even more than the original Pronto. Its elegance is accentuated by the sleek silver casing, combined with a bright 256-color LCD display. Additionally, a pick-up sensor activates the LCD display upon lifting the device.

The **interactive user interface** allows maximum flexibility for even the most sophisticated home entertainment systems. The dynamic, user friendly graphical set up is supplemented with programmable direct access buttons to enhance its flexibility as well as its customization.

8MB of memory enables the creation of larger custom configuration files, thereby meeting the need of every home theater owner to create a user-friendly remote that allows them to operate their devices with one button press.

The built-in **universal database** contains IR codes for over 500 brands, as well as the option of RF transmission for multi-room control. The capability to send RF signals to an optional RF module expands your customization even further by allowing you to address components in other rooms or in cabinets.

Compatibility is guaranteed by the standard external ports, a two-way IR input/output coupled with a two-way RS232 communication serial port. These also make it easy to upgrade with future components and applications.

ProntoProEdit software to further customize the ProntoPro is included on CD-Rom and freely available on the Internet.

For more information, take a look at our website : www.pronto.philips.com

TSU6000 - 12 NC 3104 207 12091

Specifications

- Direct access buttons mute
channel up/down
volume up/down
page up/down
2 free programmable buttons
backlight button
 - Send/learning IR eyes
 - Hardware
 - Built-in IR codes 549 brands
 - IR operating distance up to 33 ft (10 m)
 - IR operating angle ± 30 degrees (@16ft or 5 m)
 - IR learning frequencies up to 56 kHz and 455 kHz
 - Automatic power mgmt auto power up/down
 - Battery type rechargeable AAA battery pack (included)
 - LCD
 - Display type FSTN
 - Dynamic LCD input finger or capped pen
 - Resolution 320 x 240, 0.24 mm pitch
 - Position portrait
 - Number of colors 256
 - Dimensions 3 x 2.3 inches (77 x 58 mm)
 - Environment
 - Operating temperature 40°F-113°F (5°C-45°C)
 - Storage temperature -13°F-158°F (-25°C-70°C)
 - Memory
 - SRAM 512 KB
 - Flash 8 MB
 - Backlight luminance output 45 Cd/m2
 - Audio Piezo with adjustable volume
 - Processor Motorola DragonBall mc68328
 - PC link RS232 serial port
 - Weight 8.8 oz or 250 g with batteries
 - Dimensions 5.6 x 3.7 x 1.3 inches (141 x 94 x 32 mm) (length x width x height)
- Warranty 1 year
- Package contents ProntoPro remote control, docking station, serial cable, instructional manual, warranty and registration cards, rechargeable battery pack and ProntoProEdit software package on CD rom



Specifications subject to change without notice.

© 2001 Philips Remote Control Systems.
Advertype - Printed in Belgium.



PHILIPS

Let's make things better.