



Revolabs Solo[®] Executive 4-Channel Wireless Microphone System

Benefits include:

Voice Optimized

Each microphone channel is optimized to the human voice for superior performance in any environment.

Interference Free Audio

Solo Microphones use digital spread spectrum and state of the art microphone technologies that reduce interference from other wireless devices and eliminate “buzzing” in the audio from cell phones.

Natural Interaction

An innovative compact size brings more mobility and natural interaction to any meeting.

Secure, Full Duplex Audio

Each wireless microphone uses its own secure communication channel to maximize quality, security and control.

Clean, Professional Environment

No wires means less clutter and more mobility!

Ease of Installation

Includes standard connectors to all major conferencing equipment.

Unmatched Conference Audio Performance

The Solo[®] Executive 4-Channel Wireless Microphone System provides unmatched audio performance in conferencing, distance learning and other mission critical applications. The system combines the advanced audio capabilities of full duplex, wideband quality with proven encryption for security in an innovative, wearable format.

It connects seamlessly to other A/V conferencing equipment such as installed audio mixers and video conferencing codecs, and it can be easily managed by room control systems.



Each Solo[®] Executive 4-Channel Wireless Microphone System provides two-way, secure communication for up to four microphones. If more microphones are needed, additional systems can be linked together up to a total of 24 microphones in a single room.

The Solo[®] wearable microphone design significantly improves the signal-to-noise ratio performance for every user by creating a constant fixed distance from the voice source to the microphone element, thereby reducing the impact of noisy conferencing environments without impacting natural meeting dynamics.

Applications include:


- Boardroom conferencing
- Group audio and video conferencing
- Audio augmentation for large conference rooms
- Mobile sound reinforcement in large auditoriums
- Automated transcription
- Distance education

Subject to change



63 Great Road, Maynard, MA 01754
1-800-326-1088
www.revolabs.com
info@revolabs.com

it's with you[®]





Solo[®] Executive 4-Channel Wireless Microphone System

Technical Specifications*

* Subject to change

Dimensions, (L,W,H) and Weight

Executive Base Station

- 16.9" (43.03 cm) x 8.0" (20.32 cm) x 1.7" (4.42 cm)
- 6.5 lbs (2.95 kg)

Charger Base

- 8.3" (21.1 cm) x 4.3" (10.9 cm) x 1.0" (2.56 cm)
- 1 lb (0.45 kg)

Wireless Microphones

- 0.9" (2.4 cm) x 0.8" (1.95 cm) x 2.6" (6.68 cm)
- 0.05 lb (0.01 kg)

Shipping Weight

- 12.0 lbs (5.45 kg)

Radio Frequency

01-EXESYS4 (US and Canada)

- 1.92 to 1.93 GHz (UPCS North America)
- 315.00 MHz (System Mute North America)

03-EXESYSEU4 (Europe)

- 1.88 to 1.90 GHz (DECT EU)
- 433.92 MHz (System Mute EU)

Connectors

Audio In/Out (4/4)

- Phoenix (3.5mm) quick connect terminal blocks

Sync BUS In/Out

- Phoenix (3.5mm) quick connect terminal block

Diversity Antennae

- SMA Plug (50 ohm)

System Mute Antenna

- SMA Jack (50 ohm)

Control Port

- DB25 Socket

Ethernet

- RJ45 (future use)

USB

- Type A (future use)

Charger Base

- DC power input port
- Proprietary 4 pin microphone charge jacks

Microphone

- Proprietary 4 pin charge plugs
- 2.5mm mono audio (8 ohm)

Power Requirements

Executive Base Station

- 100-240V AC, 50-60 Hz, 5W (Universal Inputs)

Charger Base

- 5V DC, 2 Amps (switching power supply varies by country)

Range

- 100' (30 meters) approx. (no obstructions)
- Out-of-range alarm

Channels

01-EXESYS4 (US and Canada)

- 4 per Solo Executive 4-Channel System
- 24 channels maximum

03-EXESYSEU4 (Europe)

- 32 channels maximum

Battery

- Lithium Polymer
- 8 hours talk time

Charge Time

- 2 hours

Audio Bandwidth

- 100-6800 Hz

Encryption

- 128-bit proprietary (per microphone channel)

Included Accessories

- 4 Earpiece with inline volume control
- 4 Lanyard


Environmental Requirements

Temperature

- 5° to 100° F (5° to 40° C) operating

Humidity

- 20% to 85%

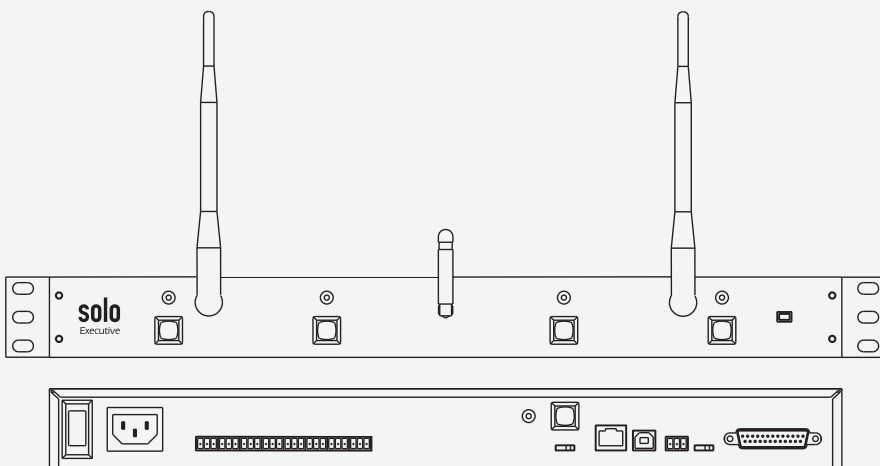

1. Channel LED indicators: Displays microphone and pairing states
2. Diversity Antennae: One set
3. Pairing Push Buttons: For pairing microphones to Base Station
4. Muting Antenna
5. Power On LED
6. On/Off Switch: Powers up unit
7. Power In Connector: AC In
8. Mini-Phoenix Connectors: Audio in and out connections (4 channels in, 4 channels out)
9. Pairing LEARN Button and Signal LED: For pairing Charger Mute to Base Station
10. Local/remote selector switch: Multi-base station synchronization
11. USB and Ethernet Ports: Future use
12. Mini-Phoenix Connectors: Multi-base station (BUS) synchronization connector
13. System Mute function switch: Remote mute control
14. DB25 Control Port (Parallel IO Port): Remote mute control

