

# STEREOMIXER™

## EIGHT-INPUT STEREO MIXER

### Product Description

StereoMixer is an 8-input, 2-output stereo mixer for line level sources. It is an ideal utility mixer that can be used to combine 4 stereo or 8 monaural sources.

StereoMixer can produce either a stereo or mono output, selected by the Output Mode switch. In Stereo mode, 4 stereo sources are combined to a stereo output. In Mono mode, all 8 inputs are combined to a mono output. Each input will accept either a balanced or unbalanced source.

A level control for each input provides adjustment from OFF to +10 dB of gain. All circuitry is direct-coupled and transformerless for absolute sonic integrity. Audio inputs and outputs are via plug-in euroblock connectors.

StereoMixer is 1/3 rack width and can be mounted in an optional rack shelf, or wall-mounted with optional wall/cabinet mounting brackets. StereoMixer is powered by an internal AC power supply.



Front





Back

### Technical Specifications

Input Level	-10 to +8 dBm
Input Impedance	20K ohms bal, 10K ohms unbal
Output Level	+4 dBm nominal, +26 dBm max
Output Load	600 ohms or higher per output, bal
Controls	Input gain, 8x
Gain	OFF to +10 dB
Frequency Response	DC to 20kHz, $\pm 0.25$ dB
Distortion	<.01% IM/THD
Noise	>80 dB below nominal output, typ
Power Requirements	115/230VAC, 50/60Hz, 3 W
Construction	Steel enclosure
Physical	5.7" w x 1.7" h x 6.0" d, 3lbs
Mounting	Table top, optional rack shelf, optional wall/cabinet mounting brackets
Approval	City of Los Angeles Elect. Test Lab

### Typical Application

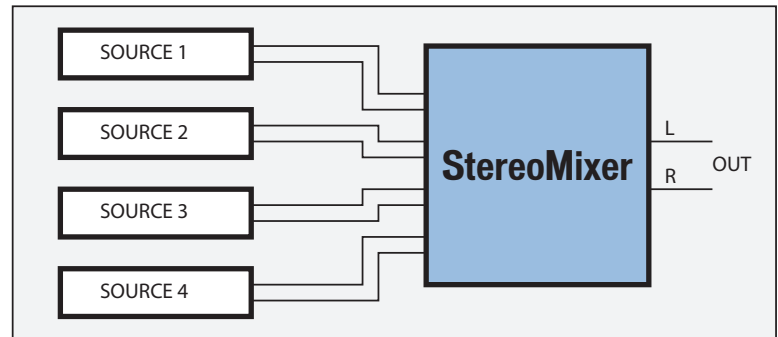

Plug-in Installation



No Wall-Warts!



Rack Mountable

Technical specifications subject to change without notice.