




SONY®

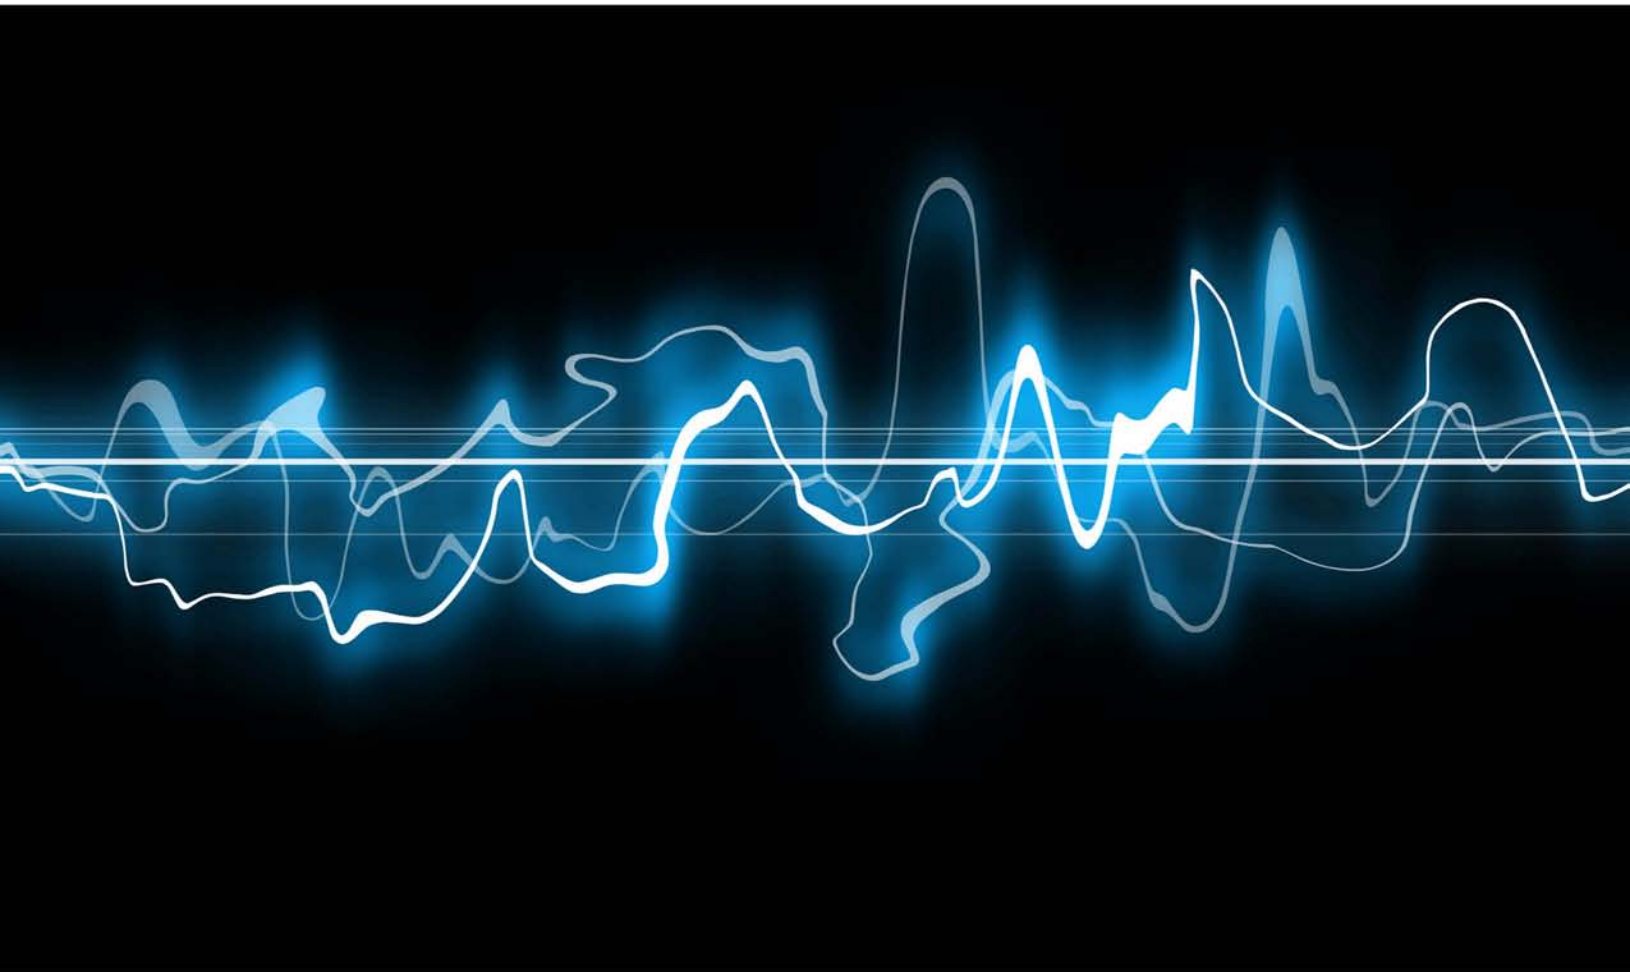

CONSUMER PRODUCTS GUIDE

WHAT'S INSIDE

SONY®



video

- VHS Video Cassette Recorders & Combos Page 2
- DVD Players Pages 3-4
- DVD Recorder Pages 4-5
- Video Projection (front & rear) Pages 9-10
- Flat Panel Displays Pages 10-13
- CRT TVs Pages 14-15
- Location Free TV Page 16
- Blu-Ray Player Page 16
- Global Positioning System Page 16
- Camcorders Page 17-19






audio

- CD Players & recorder Page 6
- Mini Disc Hi-MD Page 7
- Cassette Deck Page 8
- AV Receivers Page 8
- Headphones Pages 20-21

stay up-to-date with pricing at:
www.SonyPro.us




SONY™ VHS & DVD

Picture	Model/Description	
 <ul style="list-style-type: none"> • 2 Composite Video Inputs (1 Front/1 Rear) • RF A/V Input x 1 • Video Outputs : RF A/V Output x 1 • Composite Video Output x 1 • 2 Analog Audio Inputs (1 Front/1 Rear) • Audio Outputs : Audio Line Output x 1 • Power Requirements : AC120V, 60Hz <p>Supplied Accessories: Instruction Manual; Multi-brand Remote Control ; Size AA (R6) Batteries (2); 75-Ohm Coaxial Video Cable w/F Type Connector (1)</p>	<p>SLVN 750 VCR</p> <p>FEATURES</p> <ul style="list-style-type: none"> • 19 micron heads • Flash Rewind - Rewinds a T-120 in about 60-seconds • 17" home theater size chassis • Commercial Skip • Silver finish • Plug & Play : for easy set up for Auto Tuner Preset and AutoClock® set • Multi-lingual on-screen display • ChildLoc® circuitry • 1-Month/8 Event Recording Timer • Auto Head Cleaner • Instant Replay • Index Scan • Multi-Brand TV Remote Control • Quasi S-VHS Playback • VHS Hi-Fi Stereo; MTS Stereo TV Reception • Dual Azimuth 4 Head • Digital Auto Tracking System • Energy Star® Compliant • Linear Time Counter • Auto Repeat • Auto Play • Auto Power Off • RF input & RF Output <p>Specifications</p> <ul style="list-style-type: none"> • Weight: 6 lbs, 12 oz • Dimensions: 16-13/14 x 3-5/14 x 11-3/10" 	
 <p>Supplied Accessories: Instruction Manual; RM-T402C Remote Control ; Size AA Batteries; 75-Ohm Coaxial Cable</p>	<p>SLVN-900 HiFi VHS VCR</p> <p>FEATURES</p> <ul style="list-style-type: none"> • 19 micron heads • Flash Rewind - Rewinds a T-120 in about 60-seconds • 17" home theater size chassis • Black finish • as above with Jog Shuttle <p>Specifications</p> <ul style="list-style-type: none"> • Weight: 7 lbs, 1 oz • Dimensions: 16-13/14 x 3-5/14 x 11-3/10" 	<p>Discontinues late '06</p>
 <ul style="list-style-type: none"> • Composite Video Inputs (1 Back & 1 Front) • Composite Video Output for DVD and VHS • S-Video Output(s): for DVD only • Component Video (Y/Pb/Pr) Output for DVD only • RCA Audio Input(s) 1 Set Back and 1 Set Front • RCA Audio Output(s) 1 Set RCA Stereo • RF for VCR • Output(s): RF for VCR and DVD • Power Requirements : AC120V, 60Hz <p>Supplied Accessories: Instruction Manual; Multi-brand Remote Control ; Size AA (R6) Batteries (2); 75-Ohm Coaxial Video Cable w/F Type Connector (1)</p>	<p>SLVD 360P DVD/VCR</p> <p>FEATURES</p> <ul style="list-style-type: none"> • 4 Micron Heads HI-Fi VHS • Auto Head CleanerQuickset™ Timer Dial • Progressive Output (480p) • DVD-RW (Video/VR mode w/ CPRM) DVD-R/+RW/+R Playback • MP3 Playback (CD-R/RW, DCD-R/-RW/+R/+RW) • JPEG (CD-R/RW, DVD+RW/+R/-R/-RW, Kodak) Playback • CD-R/CD-RW)/VCD/SVCD Playback • 4-Head Hi-Fi Stereo • Flash Rewind: Rewind a T-120 Tape in around 60 seconds • VCR Plus+ Timer Recording • Cinema Illumination Multi-Brand TV Remote Control • Virtual Surround Sound • SQPB (S-VHS Quasi Playback) • 1 month/8 event Recording Timer • Auto Tracking for VHS Playback • Fast/Slow Playback with Sound • Frame Advance (Forward) • Slow Advance (Forward) • Instant Replay/Advance <p>Specifications</p> <ul style="list-style-type: none"> • Weight: 7 lbs, 15 oz (3.6 Kg) • Dimensions: 16-13/14 x 3-5/14 x 11-3/10" (430 x 85 x 287mm) 	<p>New Model: SLVD 370P April 2006</p>


SONY™ DVD PLAYERS

Picture	Model/Description
 <ul style="list-style-type: none"> • Coaxial Audio Digital Output 1 (Rear) • RCA Audio Output 1 (Rear) • S-Video Output 1 (Rear) • Composite Video Output 1 (Rear) • Component (Y/Pb/Pr) Out 1 (Rear) <p>Supplied Accessories: Remote Control; Batteries; Owners Manual; AV Cable</p>	<p>DVPNS55P-B (Black) DVD DVPNS55P-S (Silver) DVD</p> <p>FEATURES</p> <ul style="list-style-type: none"> • DVD+RW/+R playback • Precision Drive™ 3 System For Flaws in Discs • Precision Cinema Progressive™ Technology • 12 Bit Video DAC with 108Mhz • MP3 (CD-R/RW, DVD+RW/+R/-R/-RW) • JPEG (CD-R/RW, DVD+RW/+R/-R/-RW, Kodak) Playback • Remote Control: Limited TV Control for most models <p>Specifications</p> <ul style="list-style-type: none"> • Audio- Digital-to-Analog Converter: 24 Bit 192 kHz • Power Requirements: AC120V, 60 Hz • Power Consumption (in Operation): 10 Watts • Weight 3 lbs, 13 oz (1.72 Kg)
 <ul style="list-style-type: none"> • Analog Audio Outputs 5.1 Channels • Analog Video Outputs Component x1 S-Video x1 Composite x1 • Digital Audio Outputs Optical x1 Coaxial x 1 • Analog Audio Output(s) - (R+L) x1 <p>Supplied Accessories: Instruction Manual; Remote Control (RMT-D179A); AV Cable; AA Battery x 2</p>	<p>DVPNC 80 V/B (Black) DVD Changer New Model: DVPNC85H-B April 2006 DVPNC 80 V/S (Silver) DVD Changer New Model: DVPNC85H-S April 2006</p> <p>FEATURES</p> <ul style="list-style-type: none"> • 5-Disc DVD/SA-CD/CD Progressive Scan Changer • DVD/CD/SA-CD Text • HDMI 720/1080i Upscaling 5-disc Changer • Title and Chapter Viewer • DVD-RW (Video & VR Mode)/DVD-R/DVD+RW/DVD+R Playback • Precision Drive™ 3 System For Flaws in Discs • Video Equalizer • Precision Cinema Progressive™ Technology • Multi Channel Surround • 12 Bit Video DAC with 108Mhz • MP3 (CD-R/RW, DVD+RW/+R/-R/-RW) • JPEG (CD-R/RW, DVD+RW/+R/-R/-RW, Kodak) Playback • Remote Control: Limited TV Control for most models • Dolby® Digital and dts® Coaxial Output • Multi-Disc Resume- 40 Discs • Instant Replay and Instant Search • Full 3-2 Reverse Conversion • Advanced SmoothScan™; and SmoothSlow modes • Fast Play with Audio • Slow Play with Audio • Dolby® Digital and dts® Super Audio CD Playback (2 Channel/Multi Channel) <p>Specifications</p> <ul style="list-style-type: none"> • 192 kHz 24 Bit D-to-A Audio Converter • 12 Bit Video DAC 108Mhz • Power Requirements: AC120V, 60 Hz • Dimensions 17" x 3 7/15" x 16 1/8" • Weight • 9 lbs. 11 oz. (4.4Kg)
 <ul style="list-style-type: none"> • HDMI™ Connection Output x1 (Rear) • Component (Y/Pb/Pr) Out x1 (Rear) • S-Video Output x1 (Rear) • Composite Video Output x1 (Rear) • Coaxial Audio Digital Out x1 (Rear) • Optical Audio Output x1 (Rear) • RCA Audio Output x1 (Rear) <p>Supplied Accessories: Instruction Manual; Remote Control; AV Cable; AA Battery x 2</p>	<p>DVPNS 70 H DVD New Model: DVPNS75H April 2006</p> <p>FEATURES</p> <ul style="list-style-type: none"> • 720p/1080i Upscaling Video Output through HDMI™ • DVD+RW/+R playback • Precision Drive™ 3 System For Flaws in Discs • Precision Cinema Progressive™ Technology • MP3 (CD-R/RW, DVD+RW/+R/-R/-RW) • JPEG (CD-R/RW, DVD+RW/+R/-R/-RW, Kodak) <p>Specifications</p> <ul style="list-style-type: none"> • Audio- D-to-A Converter: 24 Bit 192 kHz • 12 Bit Video DAC 108Mhz • Power Requirements: AC120V, 60 Hz • Weight 4 lbs. 7 oz. (2Kg) • Dimensions 17" x 2-1/6" x 9-1/3" (430 x 55 x 237mm)

SONY™ DVD PLAYERS

Picture	Model/Description
 <ul style="list-style-type: none"> • HDMI™ Connection Outs: x1 (Rear) • i.LINK® Interface5 for Camcorders • Coaxial Audio Digital Outs: x1 (Rear) • Optical Audio Out x1 (Rear) • RCA Audio Ins x3 (2 Rear, 1 Front) • RCA Audio Outs x2 (Rear) • S-VIDEO Ins x3 (1 Rear, 2 Front) • S-Video outputs: x2 (Rear) • Composite Ins x3 (2 Rear, 1 Front) • Composite Video Outputs x2 (Rear) • Component(Y/Pb/Pr) Ins x1 (Rear) • Component (Y/Pb/Pr) Outs x1 (Rear) • RF Connection Input x1 (Rear) • RF Connection Output x1 (rear) • IR Blaster x1 (Rear) 	<p>DVP-CX995V</p> <p>FEATURES</p> <ul style="list-style-type: none"> •400 Disc DVD/SA-CD/CD Mega Changer • 720p/1080i Upscaling • Video Output - HDMI™4 Connection • SACD • Finish: black • Timer Clock: Easy timer recording on the on-screen TV Program Guide <p>Specifications</p> <ul style="list-style-type: none"> • Audio- 96 kHz 24 Bit D-to-A Converter • 12 Bit Video D-to-A Converter 108Mhz • Power Requirements: AC120V, 60 Hz • Weight 11 lbs 11 oz. (5.3 Kg) • Dimensions 17" x 3" x 13 " (430 x 75 x 328mm) <p>Supplied Accessories: Audio/Video Cord (1); Power Cord (1); 75 ohm Coaxial Cable; Set Top Box Controller; Remote Commander® Remote Control (RMT-D217A); AA Batteries (2); Instruction Manual; IR Blaster</p>

SONY™ DVD RECORDERS

 <ul style="list-style-type: none"> • i.LINK® Interface4 for DV & Digital8® Camcorders • Coaxial Audio Digital Output x1 (Rear) • Optical Audio Output x1 (Rear) • RCA Audio Inputs x2 (1 Front, 1Rear) • RCA Audio Outputs x2 (Rear) • S-Video Input x1 (Front) • S-Video Output: x1 (Rear) • Component (Y/Pb/Pr) Out x1 (Rear) <p>Supplied Accessories: Audio/Video Cord (1); Power Cord; 75 ohm Coaxial Cable; Remote Commander® Remote Control; AA Batteries (2); Instruction Manual</p>	<p>RDR-GX 315</p> <p style="text-align: right;">New Model: RDR-GX330 May 2006</p> <p>FEATURES</p> <ul style="list-style-type: none"> •DVDR Single, One-touch DV i.LINK recording from Camcrder • PCP • Non-Linear Editing (DVD-RW VR Mode) • DVD+RW/+R, DVD-RW/-R, DVD+R DL compatibility with +R double-layer DVD discs for longer recording time • MP3 on CD-R/CD-RW Playback • Variable Bit Rate Recording (HSP/SP/LSP/ LP/EP/SLP/SEP) • Dolby® Digital and dts® Decoding <p>Specifications</p> <ul style="list-style-type: none"> • Audio- Digital-to-Analog Converter: 24 Bit 192 kHz • Power Requirements: AC120V, 60 Hz • Weight 14.77 lbs. (6.7 kg) • Dimensions Width: 18 7/16" (468 mm) Height: 14 5/16" (364 mm) Depth: 3 5/16" (84 mm)
----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

SONY™ DVD RECORDERS

Picture Model/Description



RDR-VX515 DVD-R/VHS

New Model: RDR-VX530 July 2006

- i.LINK® Interface4 for DV & Digital8® Camcorders
- Coaxial Audio Digital Output x1 (Rear)
- Optical Audio Output x1 (Rear)
- RCA Audio Inputs x2 (1 Front, 1Rear)
- RCA Audio Outputs x2 (Rear)
- S-Video Input x1 (Front)
- S-Video Output: x1 (Rear)
- Component (Y/Pb/Pr) Out x1 (Rear)

FEATURES

- One Touch Dub • DVD+RW/+R, DVD-RW/-R, DVD+R DL Recording Compatibility • Progressive Scan Technology Output for DVD at 480P • 4 head Stereo VHS with 19 Micron Heads • DVD+RW/+R DVD-RW (Video Mode)/-R Recording and Playback • VHS & S-VHS (SQPB) Playback • Variable Bit Rate Recording (HSP/SP/LSP/LP/EP/SLP/SEP) • Silver

Specifications

- Audio- Digital-to-Analog Converter: 24 Bit 192 kHz
- Power Requirements: AC120V, 60 Hz
- Weight 12.6 lbs (5.7 Kg)
- Dimensions 17 x 3 2/5 x 13 1/10" (432 x 86 x 333mm)

Supplied Accessories:

Audio/Video Cord (1); Power Cord;
 75 ohm Coaxial Cable; Remote Commander® Remote Control; AA Batteries (2); Instruction Manual



RDR HX 715 DVD-R HARD DRIVE

New Model: RDR-VH830 Oct 2006

- HDMI™ Connection Output x1 (Rear)
- i.LINK® Interface5 for Camcorders
- Coaxial Audio Digital Output x1 (Rear)
- Optical Audio Output x1 (Rear)
- RCA Audio Inputs x3 (2 Rear, 1 Front)
- RCA Audio Outputs: x2 (Rear)
- S-VIDEO Inputs x3 (1 Rear, 2 Front)
- S-Video Outputs x2 (Rear)
- Composite Ins x3 (2 Rear, 1 Front)
- Composite Video Outputs: x2 (Rear)
- Component (Y/Pb/Pr) Ins x1 (Rear)
- Component (Y/Pb/Pr) Outs x1 (Rear)
- RF Connection Input(s) x1 (Rear)
- RF Connection Output x1 (rear)
- IR Blaster: x1 (Rear)

FEATURES

- DVD Recorder & Hard Disk Drive • 260 hours recording on 160 GB Hard Drive • 6-way One Touch Dub • 720p/1080i Upscaling through HDMI • TV Guide • Dynamic VBR High Quality Dubbing from Hard Disk Drive to DVD • 64 times High Speed Dubbing • i.LINK® Interface for DV & Digital8® Camcorders • Intelligent Scene Chaptering & Visual Search • Dolby® Digital and dts® • Up to 269 hrs recording on HD • Video Equalizer

Specifications

- 96kHz 24 Bit Audio Digital to Analog Converter
- Power Requirements: AC120V, 60 Hz
- Weight 11 lbs 11 oz. (5.3 Kg)
- Dimensions 17 x 3 2/5 x 13 1/10" (432 x 86 x 333mm)

Supplied Accessories: AVCord (1); Power Cord; 75 ohm Coaxial Cable; Set Top Box Controller; Remote Commander®; AA Batteries (2); Instruction Manual; IR Blaster

SONY™ CD PLAYERS

Picture Model/Description



CDP-CE375 CD PLAYER

FEATURES

- 5 disc CD changer; • 20 track music calendar; • CD-R/RW playback capability • Hybrid Pulse D/A Converter • Jog Dial™ Control with Direct Access™ Track Selection • Analog Variable Line Output • 32 Step Programming • Frequency Response 2Hz-20kHz ±0.5 dB • Dynamic Range More than 93 dB • Harmonic Distortion 0.0045%

- Analog Output (RCA Type) x 1
- Analog Out (Fixed/Variable) Variable
- Digital Output (Optical Type) x 1
- Headphone Jack 1/4"

Supplied Accessories:
 Audio Cord (1); Power Cord;
 AA Batteries (2); Instruction Manual

Specifications

- Power Requirements: AC120V, 60 Hz
- Weight 11 lbs. 1 oz. (5 kg)
- Dimensions 17" x 4 3/8" x 15 3/4" (430 x 110 x 400 mm)



CDP-CX455 CD PLAYER

FEATURES

- 400 disc CD changer with Advanced Mega Control Allows X-Fade Play/No-Delay Play Between Changers • Custom File™ Disc Memo™ Display 20 Characters • Headphone Jack

- Analog Output (RCA Type) x 1
- Analog Out (Fixed/Variable) Variable
- 2nd CD Input (RCA Type) x 1
- Digital Output (Optical Type) x 1
- Control A-1 II x 2
- Headphone Jack 1/4"

Supplied Accessories:
 Audio Cord (1); Power Cord;
 AA Batteries (2); Instruction Manual

Specifications

- Frequency Response 20Hz-20kHz ±0.5dB • Signal to Noise Ratio More than 108 dB • Dynamic Range More than 87 dB • Harmonic Distortion 0.009%
- Power Requirements: AC120V, 60 Hz • Power Consumption 16W
- Weight 19 lbs. 7 oz. (8.8 kg)
- Dimensions 17"x 7 1/2"x 21 1/4" (430 x 189 x 537 mm)

SONY™ CD RECORDER



RCDW500C CD RECORDER

FEATURES

- 5 CD/Dual Deck with 4x high speed dubbing • Records CD-Recordable and CD-ReWritable discs • CD-R/RW with MP3 playback capability • Super Bit Mapping® Recording





- Digital Input --- (Optical) x 1
- Digital Output --- (Optical) x 1
- Analog Input --- (RCA type) x 1
- Analog Output --- (RCA type) x 1

Supplied Accessories:
 Instruction Manual • Remote Commander® Remote Control • RCA Audio Cables x 2 • AA Batteries x 2


Specifications

- Frequency Response — 20Hz-20kHz ±0.5dB • Signal to Noise Ratio Playback — >100 dB • Dynamic Range Playback — >95 dB
- Power Requirements: AC120V, 60 Hz • Power Consumption 20W

SONY™ MINI DISCS

Picture	Model/Description
 <ul style="list-style-type: none"> • Optical Inputs x 1 • Line Input Jacks (RCA Type) L/R • Line Output Jacks (RCA Type) L/R <p>Supplied Accessories: Audio Cord (1); Power Cord; AA Batteries (2); Instruction Manual</p>	<p>MDS-JE480 MD Player/Recorder</p> <p>FEATURES</p> <ul style="list-style-type: none"> • ATRAC® DSP Type S/MDLP/MP3 • MD Long Play (MDLP) modes • Time Machine Recording with 6-second buffer memory; • Jog Dial™ Control • Remote Commander® Remote Control • 6-Second Buffer Memory • MP3 <p>Specifications</p> <ul style="list-style-type: none"> • Power Requirements: AC120V, 60 Hz • Weight: 6.5 lbs 6 oz (3 kg) • Dimensions: 17" x 3 3/4" x 11 1/4" (430 x 95 x 285mm)
 <ul style="list-style-type: none"> • Input USB (1.1) • Line in (Mic/Optical/Analog); • DC in 3V • Output Headphones/Remote (stereo mini) <p>Supplied Accessories: Nickel-Metal Hydride Rechargeable Battery; Dry Battery Case; Carrying Pouch; AC Power Adaptor; Earbuds; SonicStage® Software CD-ROM; USB Cable; 1GB Hi-MD™ Disc</p>	<p>MZ-M10 HI-MD Portable Player/Recorder</p> <p>FEATURES</p> <ul style="list-style-type: none"> • 1GB/ 675 Song Capacity with 1 Hi-MD MiniDisc • Large 5 Line LCD • Remote Control Supplied Records from Multiple Sources (USB, Line in, Mic in) • Record times- PCM Linear Mode (44.1kHz/16-bit) : 1 hour 34 minutes; Hi-SP Mode(ATRAC3plus 256kbs): 7 hours 55 minutes; Hi-LP Mode (ATRAC3plus 64kbs): 34 hours • ECM-DS70P Stereo Microphone <p>Specifications</p> <ul style="list-style-type: none"> • Power: Nickel metal hydride rechargeable battery NH-10WM, LR6 (Size AA) alkaline battery, AC power adapter DC 3V • Weight: 4.2.oz without battery 5.2.oz with • Dimensions:3 1/4" x 2 7/32" x 3 3/8" (80.2 x 20.7 x 84.3mm)
 <ul style="list-style-type: none"> • Input USB (1.1) • Line in (Mic/Optical/Analog); • DC in 3V • Output Headphones/Remote (stereo mini) <p>Supplied Accessories: Nickel-Metal Hydride Rechargeable Battery; Remote control; Dry Battery Case • AC Power Adaptor; Earbuds; SonicStage® Software CD-ROM • USB Cable • 1GB Hi-MD™ Disc</p>	<p>MZ-M100 HI-MD Portable Player/Recorder</p> <p>FEATURES</p> <ul style="list-style-type: none"> • SAME AS MZ-M10 EXCEPT: • 6 line large EL (Organic Electroluminescence) display is very bright and easy to see • internal rechargeable battery (NH-14WM) has a higher storage capacity • MZ-M100 is supplied with a basic remote control <p>Specifications</p> <ul style="list-style-type: none"> • Power: Nickel metal hydride rechargeable battery NH-14WM, LR6 (Size AA) alkaline battery, AC power adapter DC 3V • Weight: 4.2.oz without battery 5.2.oz with • Dimensions:3 1/4" x 2 7/32" x 3 3/8" (80.2 x 20.7 x 84.3mm)
 <ul style="list-style-type: none"> • DC In 3V, • Mic (stereo mini-jack) • Digital Line-in <p>Supplied Accessories: Headphone, Hand Strap, Carrying Pouch</p>	<p>MZ-B10 HI-MD Business Recorder</p> <p>FEATURES</p> <ul style="list-style-type: none"> • Record 320 minutes on an 80 minute MiniDisc. • Large 5 Line LCD • Remaining Recording Time Counter • 40 Hour Battery Life¹ <p>Specifications</p> <ul style="list-style-type: none"> • Power Requirements: "AA" Alkalinebattery x 1 • Weight: 3 oz (150g) • Dimensions: 8" x 7D 8" x 3" (117.2 x 23 x 74.4mm)

SONY™ CASSETTE


Picture	Model/Description
 <ul style="list-style-type: none"> • Line Input Jacks (RCA Type) L/R • Line Output Jacks (RCA Type) L/R <p>Supplied Accessories: Audio Cord (1); Power Cord; AA Batteries (2); Instruction Manual</p>	<p>TC-WE475 Cassette Player/Recorder</p> <p>FEATURES</p> <ul style="list-style-type: none"> • Dual auto reverse • Multi-AMS track search • High-speed dubbing • Dolby HX Pro circuitry • Black finish • Wide-range pitch control • Full-logic feather-touch transport controls • Super-density Permalloy heads <p>Specifications</p> <ul style="list-style-type: none"> • Power Requirements: AC120V, 60 Hz • Weight: 8 lbs., 13 oz. (4.0 kg) • Dimensions: 17" x 4-3/4" x 11-1/2" (430 x 120 x 290 mm)


SONY RECEIVERS

 <ul style="list-style-type: none"> • Video audio In & Out • Video audio (2nd) In • MD-Tape-CDR audio In & Out • CD/DVD audio (2nd) In • AM antenna • FM antenna <p>Supplied Accessories: Instruction Manual; FM Wire Antenna; RM-US185 Remote Commander® Remote Control; AM Loop Antenna; Size AA Batteries (2)</p>	<p>STR PE197 Stereo Receiver</p> <p>FEATURES</p> <ul style="list-style-type: none"> • 100 Watts Per Channel x 2 • Frequency Synthesis AM/FM Tuning with 30 Presets • 5 Function Input Selector • A or B Switch/A and B Switch • Black finish <p>Specifications</p> <ul style="list-style-type: none"> • Power Requirements: AC120V, 60 Hz • Power Consumption (in Operation): 190W • Power Consumption (Standby): 0.5W (When A.PWR is set to "No" in Menu) • Weight: 8 lbs., 13 oz. (4.0 kg) • Dimensions: 17" x 4-3/4" x 11-1/2" (430 x 120 x 290 mm)
--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

 <ul style="list-style-type: none"> • Component (Y/Pb/Pr) Inputs x2 • Component (Y/Pb/Pr) Outs: x1 • S-Video Inputs x3 • S-Video Output x2 • Composite Video Output x2 • Composite Video Ins x4 (3 Rr, 1 Frnt) • Optical Audio Inputs: x4 (3 Rr, 1 Frnt) • Optical Audio Output x1 • Coaxial Audio Digital Inputs x2 • Subwoofer Output(s): x1 • Antenna x1 AM Clip Type • RF x1 FM 75ohm Antenna • Headphone Jack: 1/4" • AC Outlet: x1 Switched 	<p>STR-DE698/B Surround Receiver New Model: STR-DG600 April 2006</p> <p>FEATURES</p> <ul style="list-style-type: none"> • 7.1 Channel Power Rating (90 Watts) • Digital Cinema Sound™ System with Cinema Studio EX; Dolby® Digital, Dolby® Digital EX, and dts® Decoding • 30 Total Station Presets • S-Video Up Conversion from Composite • 5.1 Multi-Channel Analog Input • Assignable HD Capable Component Video Inputs/1 Output • Screw Type Speaker Terminals: For A and B Speakers • Equalizer Bass/Treble <p>Specifications</p> <ul style="list-style-type: none"> • Power Requirements: AC120V, 60 Hz • Power Consumption: In use: 220 Watts; Standby: 0.2 Watts • Weight: 19 lbs, 13oz (9 Kg) • Dimensions: 17"x 6-1/5" x 14-9/16" (430 x 157.5 x 370mm) <p>Supplied Accessories: Instruction Manual; FM Wire Antenna; AM Loop Antenna; Size AA Batteries: 2 Remote Commander® Remote Control</p>
------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

SONY™ VIDEO PROJECTION

Picture	Model/Description
 <ul style="list-style-type: none"> • 12V Trigger: 1 (1 Side) Mini Jack • HDMI™ Connection(s): 1 (1 Side) • Digital RGB/Y/Cb(Pb)Cr(Pr) • Component Video (Y/Pb/Pr) In (1 Side) Y/Cb/Pb/Cr/Pr • Input A - HD D-sub 15-pins, Analog RGB/componen • Composite Video Input (1 Side) • Component Video (Y/Pb/Pr) • S-Video Input 1 • Remote Network Connection(1 Side) • RJ-45 10 BASE-T/100BASE-TX (• RS-232C: D-sub 9-pin (female) • DVI Connection Input DVI-D (TMDS) • Digital RGB 	<p>VPL-VW100 High Definition Projector</p> <p>FEATURES</p> <ul style="list-style-type: none"> • SXRDT™ 1080P Home Theater Front Projector • Supports HD with three SXRDT™ 1920 x 1080 Panels • Up to 15,000:1 Contrast Ratio (Advanced Iris On) • Low fan noise level of 22 dB • Pure Xenon Lamp (400W) • Advanced Iris Function (Auto, On, Off) • Lens Shift • Gamma Correction (Gamma 1, 2, 3 and Off) • Color Temperature (High, Medium, Low and Custom 1, 2, 3) • Auto Input Search • Image Flip • Vertical Keystone Lens: fl 8.7 to 33.7 mm/ F2.54 to 3.53 mm <p>Specifications</p> <ul style="list-style-type: none"> • Power Requirements: AC 100 to 240V, 0.8 to 1.95A, 50/60Hz • Weight: 41 lbs 13 oz (19 kg) • Dimensions: 19 1/2" x 6 7/8" x 22 5/8" (496 mm x 175 mm x 574 mm) <p>Supplied Accessories: Remote Control (RM-PJVW100); Instruction Manual</p> <p>Optional Accessories: Xenon Replacement Lamp (LMP-H400); Omnimount PM-2 ceiling mount</p>

 <ul style="list-style-type: none"> • RF Connection Inputs 2 (2 Rear) • CableCARD™ Slot • Composite Video Inputs 3 (1 Front / 2 Rear) • S-Video Inputs 3 (1 Front / 2 Rear) • Component (Y/Pb/Pr) Inputs 2 (2 Rear) • Audio In: 5 (1 Front / 4 Rear) • Analog Audio Out: 1 (1 Rear) • PC Input 1 (1 Rear) • Digital Input(s): i.LINK 3 (3 Rear) • HDMI™ Connection Ins 2 (Rear: 1 with Audio Ins, 1 without) • Memory Stick® Media Slot: 1 (1 Rear) • Control-S Input 1 (1 Rear) • Control-S Outpu: 1 (1 Rear) 	<p>KDS-R60XBR1 High Definition RPTV New Model: KDS60A2000 Aug 2006 Discontinued June</p> <p>FEATURES</p> <ul style="list-style-type: none"> • 60" Grand WEGA™ SXRDT™ Rear Projection HDTV; SXRDT™ Technology • Native Resolution: 1920 x 1080 • WEGA GATE™: Easy User Interface • Freeze Memo™ Screen Freeze: Picture and Picture (PAP) • Caption Vision: Closed Caption (Analog / Digital) • Favorite Channel • Channel Label • Channel Skip/Add • Speed Surf™ Channel Selection • Channel Jump • Info Banner • Parental Control (V-Chip) • Clock: with ON/OFF Timer • Sleep Timer: • Viewing Angle: Vertical = 60 degrees / Horizontal = 130 degrees • Tuner: ATSC/8VSB <p>Specifications</p> <ul style="list-style-type: none"> • Power Requirements: AC 100 to 240V, 0.8 to 1.95A, 50/60Hz • Weight: 112 lbs. 7 oz. (43 kg.) • Dimensions: 66" x 39 3/4" x 20 1/4" (1,674 x 1,009 x 514 mm) <p>Supplied Accessories: RM-Y914 Remote Control; Batteries (AAA x2); Quick Start Guide</p>
-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

SONY™ VIDEO PROJECTION

Picture

Model/Description



- PC Input (D-sub 15) + Audio Input (Stereo Mini) (1 Front)
- HDMI™ + Audio L&R 1 (1 Rear)
- Component(Y/Pb/Pr) In: 3 (1 Front / 2 Rear)
- S-Video Input 1 (1 Rear)
- Composite Video Inputs 3 (1 Front / 2 Rear)
- RF 75-ohm F-type 1 (1 Rear)
- ICable 75-ohm F-type (1 (1 Rear)
- CableCARD™ PCMCIA-type 1 Rear)
- Total Audio Input (LR, RCA-pin) excluding HDMI 5 (1 Front / 4 Rear)
- Digital Audio Out (Optical) (1 Rear)
- Audio Output: Audio Output (Variable/Fixed) 1 (1 Rear)

KDF-E42A10 Rear Screen TV
 Discontinued June

Switch to: KDL-40S2000 FP
 or **KDL-46S2000 FP**

FEATURES

- 3LCD Rear Projection HDTV. • Panel Type: LCD 0.73" (1280 x 720)
- Aspect Ratio: 16:9 • Tuner: Terrestrial (VHF/UHF/CATV) • Tuner: ATSC 8VSB, Clear QAM, POD QAM • WEGA Engine™ • Video Signal System: 480i, 480p, 720p, 1080i • Picture Modes: Vivid, Standard and Custom
- Brightness, Color, Hue, Sharpness • Video Function: Game Picture (On/Off) • DRC® Mode • Cinema Black Pro - Iris & Advanced Iris • Gamma (Max/High/Medium/Low/Off) • Video Freeze • Favorite Channel • Channel Label
- Channel Surf • Closed Caption • V Chip Parental Control
- TruSurround® XT Audio • Sound Mode: BBE Digital • SAP/MTS • Speaker On/Off

Specifications

- Power Requirements: AC 120V 60Hz
- Consumption: In Use: 210 Watts Standby: Less than 17 Watts
- Weight: 61lbs. 12oz (28kg)
- Dimensions: 39 3/8"x28 1/2"x14 1/8" (999x722x357mm)

Supplied Accessories:

RM-YD003 ; AA (R6) Batteries; Operating Instructions; Quick Setup Guide; Warranty Card; Product Registration Card

SONY FLAT PANEL DISPLAYS



- Audio In: 5 (1 Side / 4 Rear)
- Audio Out (Variable/Fixed) 1 (Rear)
- Component (Y/Pb/Pr) Ins 1 (Rear) 480i, 480p, 720p, 1080i
- Composite Video Ins 3 (1 Side / 2 Rear)
- HDMI™ Connection Inputs 1 (Rear) with Analog Audio
- RF Connection Inputs 1 (Rear)
- S-Video Inputs 3 (1 Side / 2 Rear)
- Headphone Out 1 (Side)
- PC Audio Inputs 1 (Rear)
- PC Video Inputs: 1 (Rear) - D-sub 15

KLV-S19A10 LCD FLAT PANEL TV
 Discontinued June

FEATURES

- 19" LCD panel • Native Resolution: 720p • Contrast Ratio: 800:1
- Horizontal Scan (KHz) for PC: 31/ 31.5 / 35.2 / 37.9 / 46.9 / 47.4 / 47.7 / 47.8 / 56.5 / 60 / 60.3 • Display Resolution: 1280 x 768 • VESA: VESA FDMI Compliant Mounting Holes


Specifications

- Power Requirements: AC 120-240V, 50/60Hz
- Power Consumption (in Operation): 95W
- Weight: 22.71 lbs. (10.3 kg) with tabletop stand 14.77 lbs. without stand
- Dimensions: 8.43" x 15.83" x 8.58" (468 x 402 x 218 mm) with stand 18.43" " x 14.33" x 3.31" (468 x 364 x 84 mm) without stand)

Supplied Accessories:


Remote Control (RM-YA001; Batteries (Type AA, x2); AC Power Adaptor; AC Power Cord; Support Belt; Securing Screws; Operating Instructions Quick Step Guide; Table Top Stand; Warranty Card; Installation of Wall Mount Bracket to TV Leaflet; On-Line Registration Card


SONY™ FLAT PANEL DISPLAYS

Picture	Model/Description
 <ul style="list-style-type: none"> • Audio In: 5 (1 Side / 4 Rear) • Audio Out (Variable/Fixed) 1 (Rear) • Component (Y/Pb/Pr) Ins 1 (Rear) 480i, 480p, 720p, 1080i • Composite Video Ins (1Side /2 Rear) • HDMI™ Connection Inputs 1 (Rear) with Analog Audio • RF Connection Inputs 1 (Rear) • S-Video Inputs 3 (1 Side / 2 Rear) • Headphone Outputs 1 (Side) • PC Audio Inputs 1 (Rear) • PC Video Inputs 1 (Rear) - D-sub 15 	<p>KLV-S23A10 (Discontinued) New Model: KDL-23S2000 Aug 2006 like 26 below</p> <p>FEATURES</p> <ul style="list-style-type: none"> • 23" LCD Flat Panel HD-Ready TV • Native Resolution: 720p • Contrast Ratio: 800:1 • ATSC Digital Tuner • Horizontal Scan (KHz) for PC: 31/ 31.5 / 35.2 / 37.9 / 46.9 / 47.4 / 47.7 / 47.8 / 56.5 / 60 / 60.3 • Display Resolution: 1366 x 768 • Limited Warranty: 1 Year Parts, 1 Year Labor • Audio Power Output: 10W Total (5W x 2) • Stand Tilt Range: L/R: 15° • Stand Swivel Range: Forward 3° / Back 8° • VESA: VESA FDMI Compliant Mounting Holes; • Energy Star™ <p>Specifications</p> <ul style="list-style-type: none"> • Power Requirements: AC 120-240V, 50/60Hz • Weight: 27 lbs. 2 oz.(12.3 kg) with tabletop stand 19 lbs. 3 oz. without stand • Dimensions: 22 3/8" x 17 3/4" x 8 5/8" (566 x 448 x 218 mm) with stand 22 3/8" x 16 1/4" x 3 5/8" (566 x 411 x 89 mm without stand) <p>Supplied Accessories: Remote Control (RM-YA001); Batteries (Type AA, x2); AC Power Cord; Support Belt; Securing Screws; Operating Instructions; Quick Setup Guide; Table Top Stand; Warranty Card; Leaflet Installing wall mounting bracket to the TV; On-Line Registration Card</p>

 <ul style="list-style-type: none"> • HDMI™1 1 Rear (with L/R RCA audio connections) • PC Input: 1 Rear (D-sub 15 and L/R stereo mini plug connection) • Component (Y/Pb/Pr) Ins: 2 (2 rear) • S-Video Input(s): 2 (1 side/1 rear) rear w/ Auto S Video Input Detection • Composite Ins 3 (1side/2 rear) • RF Connection Input(s): 1 Rear • Audio In: 5 (1 side/4 rear) • Audio Out (Variable/Fixed):1 Rear • Digital Audio Output 1 Rear • Headphone Output 1 Side 	<p>KDL-26S2000 LCD FLAT PANEL TV</p> <p>FEATURES</p> <ul style="list-style-type: none"> • 26" LCD Flat Panel HD-Ready TV • Native Resolution: 720p • Contrast Ratio: 800:1 • ATSC Digital Tuner • Horizontal Scan (KHz) for PC: 31/ 31.5 / 35.2 / 37.9 / 46.9 / 47.4 / 47.7 / 47.8 / 56.5 / 60 / 60.3 • Display Resolution: 1366 x 768 • Limited Warranty: 1 Year Parts, 1 Year Labor • Viewing Angle: Right/Left: 170°, Up/Down: 170° • Response Time: 10 msec • Audio Power Output: 10W Total (5W x 2) • Stand Tilt Range: L/R: 15° • Stand Swivel Range: Forward 3° / Back 8° • VESA: VESA FDMI Compliant Mounting Holes • Energy Star™ <p>Specifications</p> <ul style="list-style-type: none"> • Power Requirements: AC 100 to 240V, 0.8 to 1.95A, 50/60Hz • Weight: 28.7 lbs. (13 kg) with tabletop stand 25.25 lbs. without stand • Dimensions: 25 29/32" x 20 5/16" x 8 5/8" (658 x 516 x 219 mm) with stand 25 29/32" x 18 1/2" x 3 23/32" (658 x 470 x 94 mm) w/o stand <p>Supplied Accessories: Tabletop Stand; RM-YD005 Remote Control; AA x 2 Batteries; Coaxial Cable (x1); HD-15 to HD15 Cable (x1); Support belt and screws; Operation Manual</p>
---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

SONY™ FLAT PANEL DISPLAYS

Picture	Model/Description
 <ul style="list-style-type: none"> • HDMI™1 Rear (with L/R RCA audio) • PC Input 1 Rear (with D-sub 15 and L/R stereo mini plug) • Component (Y/Pb/Pr) Ins 2 (2 rear) • S-Video Inputs 2 (1 side/1 rear) rear w/ Auto S Video Input Detection • Composite Video Inputs 3 (1 side/2 rear) • RF Connection Inputs 1 Rear • Audio Ins 5 (1 side/4 rear) • Audio Out (Variable/Fixed) 1 Rear • Digital Audio Output 1 Rear • Headphone Output 1 Side 	<p>KDL-32S2000 LCD FLAT PANEL TV</p> <p>FEATURES</p> <ul style="list-style-type: none"> • 32" BRAVIA™ S-Series HD-Ready TV • Native Resolution: 720p 1366 x 768 • Contrast Ratio: 1300:1 • ATSC Digital Tuner • Horizontal Scan (KHz) for PC: 31/ 31.5 / 35.2 / 37.9 / 46.9 / 47.4 / 47.7 / 47.8 / 56.5 / 60 / 60.3 • Display Resolution: 1366 x 768 • Viewing Angle: 178 degrees (left/right) / 178 degrees (up/down) • Limited Warranty: 1 Year Parts, 1 Year Labor • Audio Power Output: 10W Total (5W x 2) • VESA: VESA FDMI Compliant Mounting Holes • Energy Star™ <p>Specifications</p> <ul style="list-style-type: none"> • Power Requirements: AC 120-240V (50/60Hz) • Weight: 37.47 lbs. (17 kg) with tabletop stand 33.06 lbs without stand • Dimensions: 31 3/16" x 23 11/32" x 8 5/8" (792 x 593 x 219 mm) with stand 31 3/16" x 21 1/2" x 3 7/8" (792 x 546 x 99 mm) without stand <p>Supplied Accessories: Tabletop Stand; RM-YD005 Remote Control ; AA x 2 Batteries; Coaxial Cable (x1); HD-15 to HD15 Cable (x1); Support belt and screws; Operation Manual</p>

 <ul style="list-style-type: none"> • HDMI™1 Rear (with L/R RCA audio) • PC Input 1 Rear (with D-sub 15 and L/R stereo mini plug) • Component (Y/Pb/Pr) Ins 2 (2 rear) • S-Video Inputs 2 (1 side/1 rear) rear w/ Auto S Video Input Detection • Composite Video Inputs 3 (1 side/2 rear) • RF Connection Inputs 1 Rear • Audio Ins 5 (1 side/4 rear) • Audio Out (Variable/Fixed) 1 Rear • Digital Audio Output 1 Rear • Headphone Output 1 Side 	<p>KDL-40S2000 LCD FLAT PANEL TV</p> <p>FEATURES</p> <ul style="list-style-type: none"> • 40" BRAVIA™ S-Series HD-Ready TV • Native Resolution: 720p 1366 x 768 • Contrast Ratio: 1300:1 • ATSC Digital Tuner • Horizontal Scan (KHz) for PC: 31/ 31.5 / 35.2 / 37.9 / 46.9 / 47.4 / 47.7 / 47.8 / 56.5 / 60 / 60.3 • Display Resolution: 1366 x 768 • Viewing Angle: 178 degrees (left/right) / 178 degrees (up/down) • Limited Warranty: 1 Year Parts, 1 Year Labor • Audio Power Output: 10W Total (5W x 2) • Panel Response Time: 8 ms (gray to gray) • VESA: VESA FDMI Compliant Mounting Holes; • Energy Star™ <p>Specifications</p> <ul style="list-style-type: none"> • Power Requirements: AC 120-240V, 50/60Hz • Power Consumption (in Operation): 200W • Weight: 59.5 lbs. (27 kg) with tabletop stand 46.3 lbs. without stand • Dimensions: 38 7/8" x 28 3/16" x 13 5/32" (988 x 716 x 334 mm) with stand 38 7/8" x 26 5/32" x 4 1/16" (988 x 664 x 103 mm) without stand <p>Supplied Accessories: Tabletop Stand; RM-YD005 Remote Control ; AA x 2 Batteries; Coaxial Cable (x1); HD-15 to HD15 Cable (x1); Support belt and screws; Operation Manual</p>
---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

SONY™ FLAT PANEL DISPLAY

Picture

Model/Description



KDL-46S2000 LCD FLAT PANEL TV

FEATURES

- 46" BRAVIA™ S-Series HD-Ready TV • Native Resolution: 720p 1366 x 768
- Contrast Ratio: 1300:1 • ATSC Digital Tuner • Horizontal Scan (KHz) for PC: 31/ 31.5 / 35.2 / 37.9 / 46.9 / 47.4 / 47.7 / 47.8 / 56.5 / 60 / 60.3 • Display Resolution: 1366 x 768 • Viewing Angle: 178 degrees (left/right) / 178 degrees (up/down) • Limited Warranty: 1 Year Parts, 1 Year Labor • Audio Power Output: 10W Total (5W x 2) • VESA: VESA FDMI Compliant Mounting Holes; • Energy Star™

Specifications

- Power Requirements: AC 120-240V (50/60Hz)
- Power Consumption (in Operation): 120W
- Weight: 74.96 lbs. (17 kg) with tabletop stand 61.73 lbs without stand
- Dimensions: 44 1/8" x 31 3/4" x 13 1/4" with stand
 44 1/8" x 29 3/4" x 4 5/8" without stand

- HDMI™1 Rear (with L/R RCA audio)
- PC Input 1 Rear (with D-sub 15 and L/R stereo mini plug)
- Component (Y/Pb/Pr) Ins 2 (2 rear)
- S-Video Inputs 2 (1 side/1 rear rear w/ Auto S Video Input Detection)
- Composite Video Inputs 3 (1 side/2 rear)
- RF Connection Inputs 1 Rear
- Audio Ins 5 (1 side/4 rear)
- Audio Out (Variable/Fixed) 1 Rear
- Digital Audio Output 1 Rear
- Headphone Output 1 Side

Supplied Accessories:

Tabletop Stand; RM-YD005 Remote Control ; AA x 2 Batteries; Coaxial Cable (x1); HD-15 to HD15 Cable (x1); Support belt and screws; Operation Manual

SONY 1080 HIGH DEFINITION FLAT PANEL DISPLAYS



New Model KDL- 40V2000 LCD FLAT PANEL TV Sept 2006

FEATURES




- 40" BRAVIA™ V-Series HD TV • Native Resolution: 1080p full HD 1920 x 1080 • HDMI x2 • WCG-CCFL BACKLIGHT, • bottom spkr • ATSC Digital Tuner

New Model KDL-46V2000 LCD FLAT PANEL TV Sept 2006




FEATURES

- 46" BRAVIA™ V-Series HD TV • Native Resolution: 1080p full HD 1920 x 1080 • HDMI x2 • WCG-CCFL BACKLIGHT, • bottom spkr • ATSC Digital Tuner

SONY™ CRT TVs

Picture	Model/Description
 <ul style="list-style-type: none"> • Analog Audio Inputs 3 (1 Front/2 Rear) • Component (Y/Pb/Pr) In 1 (Rear) • Composite Video Inputs 2 (1 Front/1 Rear) • RF Connection Inputs: 2 (Rear) - 1 Analog (UHF/VHF);1 Digital (ATSC) • S-Video In 1 (Rear) with Detection 	<p>KD-27FS170 FD Trinitron® WEGA® Digital TV</p> <p>FEATURES</p> <ul style="list-style-type: none"> • 27" Flat Trinitron® Picture Tube • 3-Line Digital Comb Filter • ATSC Digital Tuner • Program Palette™ Presets • Native Resolution: 480i • Aspect Ratio: 4:3 • Wide Screen Mode • Limited Warranty: 90 Days Labor / 1 Year Parts / 2 Years Picture Tube <p>Specifications</p> <ul style="list-style-type: none"> • Power Requirements: AC 120 (60Hz) • Power Consumption: 130W in use, < 1 W in Stand-by • Weight: 99 lbs. 9 oz. (45.2 kg) • Dimensions: 30 1/4" x 23 1/4" x 19 5/8" (768 x 589 x 497mm) <p>Supplied Accessories: Instruction Manual; Remote Control (RM-YD006); AA Battery x 2</p>
 <ul style="list-style-type: none"> • Analog Audio Inputs 3 (1 Front/2 Rear) • Component (Y/Pb/Pr) In 1 (Rear) • Composite Video Inputs 2 (1 Front/1 Rear) • RF Connection Inputs: 2 (Rear) - 1 Analog (UHF/VHF);1 Digital (ATSC) • S-Video In 1 (Rear) with Detection 	<p>KD-32FS170 FD Trinitron® WEGA® Digital TV</p> <p>FEATURES</p> <ul style="list-style-type: none"> • 32" Flat Trinitron® Picture Tube • 3-Line Digital Comb Filter • ATSC Digital Tuner • Program Palette™ Presets • Native Resolution: 480i • Aspect Ratio: 4:3 • Wide Screen Mode • Limited Warranty: 90 Days Labor / 1 Year Parts / 2 Years Picture Tube <p>Specifications</p> <ul style="list-style-type: none"> • Power Requirements: AC 120 (60Hz) • Power Consumption: 160W in use, < 1 W in Stand-by • Weight: 165 lbs. 6 oz. (75 kg) • Dimensions: 35 3/8" x 27 3/8" x 22 5/8" (898 x 696 x 576mm) <p>Supplied Accessories: Instruction Manual; Remote Control (RM-YD006); AA Battery x 2</p> <p>Optional Accessories: SU-32FS2 TV Stand</p>
 <ul style="list-style-type: none"> • Analog Audio Inputs 3 (1 Front/2 Rear) • Component (Y/Pb/Pr) In 1 (Rear) • Composite Video Inputs 2 (1 Front/1 Rear) • RF Connection Inputs: 2 (Rear) - 1 Analog (UHF/VHF);1 Digital (ATSC) • S-Video In 1 (Rear) with Detection 	<p>KD-36FS170 FD Trinitron® WEGA® Digital TV</p> <p>FEATURES</p> <ul style="list-style-type: none"> • 36" Flat Trinitron® Picture Tube • 3-Line Digital Comb Filter • ATSC Digital Tuner • Program Palette™ Presets • Native Resolution: 480i • Aspect Ratio: 4:3 • Wide Screen Mode • Limited Warranty: 90 Days Labor / 1 Year Parts / 2 Years Picture Tube <p>Specifications</p> <ul style="list-style-type: none"> • Power Requirements: AC 120 (60Hz) • Power Consumption: 130W in use, < 1 W in Stand-by • Weight: 216 lbs. 8 oz. (75 kg) • Dimensions: 38 3/4" x 30 1/2" x 24 7/8" (985 x 774 x 633mm) <p>Supplied Accessories: Instruction Manual; Remote Control (RM-YD006); AA Battery x 2</p> <p>Optional Accessories: SU-36FS2 TV Stand</p>

SONY™ CRT TVs

Picture	Model/Description
 <ul style="list-style-type: none"> • Analog Audio Inputs 3 (1 Front/2 Rear) • Component (Y/Pb/Pr) In 2 (Rear) 480p, 720p, 1080i • Composite Video Inputs 3 (1 Front/2 Rear) • RF Connection Inputs: 2 (Rear) - 1 Analog (UHF/VHF); 1 Digital (ATSC) • S-Video In 3 (1 Front/2 Rear) • Audio Out (Variable/Fixed) • Digital Audio Output 1 (Coaxial) • HDMI™ 1 Connection 1 Rear 	<p>KD-34XBR-970 Trinitron® WEGA® XBR Digital TV</p> <p>FEATURES</p> <ul style="list-style-type: none"> • 34" Flat Trinitron® Picture Tube • 3-Line Digital Comb Filter • ATSC Digital Tuner • Program Palette™ Presets • CineMotion® Inverse 3:2 Pull-down • DRC-MF® Circuitry • HDMI™ • Native Resolution: 480i • Aspect Ratio: 4:3 • Wide Screen Mode • Limited Warranty: 2 Years Parts and Labor / 2 Years Picture Tube <p>Specifications</p> <ul style="list-style-type: none"> • Power Requirements: AC 120 (60Hz) • Power Consumption: 240W in use, < 1 W in Stand-by • Weight: 190 lbs. 9 oz. (86.2 kg) • Dimensions: 39 1/8" x 25 3/4" x 23 3/4" (994 x 654 x 604mm) <p>Supplied Accessories: Instruction Manual; Remote Control (RM-YD007); AA Battery x 2</p> <p>Optional Accessories: SU-34XBR4TV Stand</p>
 <ul style="list-style-type: none"> • Component (Y/Pb/Pr) In 1 (Rear) • Composite Video Inputs 1 (Rear) • RF Connection Inputs: 1 (Rear) 	<p>KV-20FS120 FD Trinitron® WEGA® Digital TV</p> <p>FEATURES</p> <ul style="list-style-type: none"> • 20" Flat Trinitron® Picture Tube • Digital Comb Filter • Native Resolution: 480i • Aspect Ratio: 4:3 • Wide Screen Mode • Limited Warranty: 90 Days Labor / 1 Year Parts / 2 Years Picture Tube <p>Specifications</p> <ul style="list-style-type: none"> • Power Requirements: AC 120 (60Hz) • Weight: 55 lbs. 9 oz. (25.2kg) • Dimensions: 24 7/8" x 18 3/8" x 19 1/4" (631 x 468 x 490.5mm) <p>Supplied Accessories: Instruction Manual; Remote Control (RM-Y194); AA Battery x 2</p>
 <ul style="list-style-type: none"> • Component (Y/Pb/Pr) In 1 (Rear) • Composite Video Inputs 1 (Rear) • RF Connection Inputs: 1 (Rear) • S-Video In 1 (Rear) 	<p>KV-24FS120 FD Trinitron® WEGA® Digital TV</p> <p>FEATURES</p> <ul style="list-style-type: none"> • 24" Flat Trinitron® Picture Tube • 3-Line Digital Comb Filter • ATSC Digital Tuner • Program Palette™ Presets • Native Resolution: 480i • Aspect Ratio: 4:3 • Wide Screen Mode • Limited Warranty: 90 Days Labor / 1 Year Parts / 2 Years Picture Tube <p>Specifications</p> <ul style="list-style-type: none"> • Power Requirements: AC 120 (60Hz) • Power Consumption: 130W in use, < 1 W in Stand-by • Weight: 72 lbs. 5 oz. (32.8 kg) • Dimensions: 28 1/4" x 20 3/4" x 18 7/8" (718mm x 526.5mm x 480 mm) <p>Supplied Accessories: Instruction Manual; Remote Control (RM-Y194); AA Battery x 2</p>

SONY™ LOCATION FREE® TV

Picture

Model/Description



LF-X11 Location-Free TV



FEATURES

- You can access your favorite content virtually anywhere via the LF-X11 12 inch screen. LocationFree TV is dual-band wireless TV with excellent reception
- 12.1" LocationFree® TV • SVGA 12.1 inch Wireless8 Touch Screen LCD Monitor • Base Station unit • Advanced wireless TV with dualband WiFi technology (IEEE 802.11a/b/g)
- A/V control using on-screen universal remote with learning capability
- Web-browsing and e-mail functions
- Photo album function via Memory Stick® slot and on-screen hand drawing function
- Battery Duration Approx: 4 Hours (at Minimum Backlight)

- Ethernet Port
- USB (for Keyboard)
- Video Input (Mini Jack)
- Headphone Jack

Supplied Accessories:

LocationFree Player for PC; Lithium Ion Battery; IR Blaster; Stylus ; AC Adaptor (for Base Station and Monitor); Operations Instruction; DVD Instruction Video

Specifications

- Power Requirements: AC 120-240V (50/60Hz)
- Power Consumption (in Operation): 120W
- Weight: Monitor: 5 lbs. 1 oz. Base Station: 1 lb. 1 oz.
- Dimensions: Monitor: 13 1/2" x 7 1/4" x 5 1/8" Base Station: 1 13/16" x 7 1/4" x 5 1/8"

SONY BLU-RAY PLAYER



New Model BDPS1 High Definition DVD Aug 2006



FEATURES

- BlueRay Hi Capacity 50GB • Highest Data Xfer Speed • Full HD 1080P output, • DVD upscale 1080P • Rigid Frame • HDMI out x1

Specifications

- Power Requirements: AC 120-240V (50/60Hz)
 - Power Consumption (in Operation): 120W
 - Weight: 74.96 lbs. (17 kg) with tabletop stand 61.73 lbs without stand
 - Dimensions: 44 1/8" x 31 3/4" x 13 1/4" with stand 44 1/8" x 29 3/4" x 4 5/8" without stand
- HDMI™ Connection1 Output 1 (Rear)
 - Component (Y/Pb/Pr) Out 1 (Rear)
 - S-Video Output 1 (Rear)
 - Composite Audio Out 1 (Rear)
 - Optical Audio Output 1 (Rear)
 - Coaxial Audio Digital Output 1 (Rear)
 - Analog Audio Outputs 5.1 ch
 - Analog Audio Outputs: 2 ch; 1
 - IR Input 1 (Rear)

SONY GPS






NVU70 Portable Satellite Navigation System



- 3.5" High Brightness Touchscreen Display Built-in GPS antenna and 2-way speaker system • Dimensions • 4.1" x 3.5" x 1.8" (104.7mm x 87.5mm x 42.9mm)

SONY™ CAM CORDERS

Picture	Model/Description
 <ul style="list-style-type: none"> • Composite (Mini) • S-Video • Audio Input/Output (Stereo, Mini) • i.LINK®² DV Interface (IEEE1394): • Headphone Jack (Stereo, Mini) • Mic. Input (Stereo, Mini) <p>Supplied Accessories: AC-L15 Power Adaptor/ In-Camera Charger, NP-F570 InfoLithium® Rechargeable Battery, RMT-831 Wireless Remote Commander® Remote Control, AA Battery, Lens Hood, Lens Cap, Multi A/V Cable, Component Video Cable, Cleaning Cassette, Shoe Adapter, Large Eye Cup, Shoulder Strap</p>	<p>HDR-FX1 HDV Handycam® Camcorder</p> <p>FEATURES</p> <ul style="list-style-type: none"> • 1080i high definition video recording and playback • 3 - 1/3" wide aspect ratio Advanced HAD™ CCD imagers for enhanced color quality • Professional-level MPEG2 video compression with the Real-time HD Codec Engine • Carl Zeiss® Vario-Sonnar® T* lens with 12x optical zoom • 3.5" wide precision hybrid SwivelScreen™ LCD display <p>Specifications</p> <ul style="list-style-type: none"> • Power Consumption (VF/LCD/VF+LCD): 7.4W / 8.0W / 8.4W • Recording and Playback Times: HQ: 440 min., SP: 650 min., LP 1250 min Dimensions (WHD): 6" x 7 1D 8" x 14 3D 8" • Weight: 4 lbs 4 oz
 <ul style="list-style-type: none"> • LANC Terminal: (Stereo Mini) • Analog Audio/Video Out (Multi A/V) • Digital Audio/Video In/Out: (i.LINK®) • USB Port (1.1 compliant) <p>Supplied Accessories: Power Adaptor/ In Camera Charger (AC-L15); InfoLithium® Rechargeable Battery (NP-FM50); Wireless Remote Commander® Remote Control (RMT-831); Lens Hood; Lens Cap; A/V Cable; Component Video Cable; Shoulder Strap</p>	<p>HDR-HC3 HDV 1080i Handycam® Camcorder</p> <p>FEATURES</p> <ul style="list-style-type: none"> • 1080i high definition video recording and playback • Single 1/3" 2.1 Megapixel (Gross) ClearVid CMOS Sensor™ • Record in High Definition or Standard Definition • 10X Optical / 80X Digital Zoom • Carl Zeiss® Vario-Sonnar® T* Lens <p>Specifications</p> <ul style="list-style-type: none"> • Power Consumption (VF/LCD/VF+LCD): 7.4W / 8.0W / 8.4W • Dimensions (WHD): 6" x 7 1D 8" x 14 3D 8" • Weight: 4 lbs 4 oz
 <ul style="list-style-type: none"> • USB Port (2.0 compliant) • Mic In (thru Active Interface Shoe) • Analog Audio/Video Out (Multi A/V) • Digital Audio/Video In/Out: (i.LINK®) • S-Video I/O (optional accessory) <p>Supplied Accessories: Power Adapter/In-Camera Charger (AC-L200), InfoLithium® Rechargeable Battery (NP-FP60), Remote Commander Remote Control (RMT-835), A/V Cable (Stereo), ImageMixer for Hard Disk Drive, USB Cable</p>	<p>DCR-SR100 30GB Hard Drive Handycam®</p> <p>FEATURES</p> <ul style="list-style-type: none"> • 2 Megapixel (video) 1/3" Advanced HAD™ CCD • 3.3 Megapixel (still) • Professional Quality Carl Zeiss® Vario-Sonnar® T* lens • Dolby Digital 5.1ch Recording • Super SteadyShot® Picture Stabilization System • Switch between 4:3 and 16:9 aspect • Digital Still Memory Mode <p>Specifications</p> <ul style="list-style-type: none"> • Power Consumption (VF/LCD/VF+LCD): 7.4W / 8.0W / 8.4W • Dimensions: 3/8" x 2 3/4 "x 5 7/8" (82 x 69 x 149mm) • Weight: 1 lb. 6 oz (615g) with Battery

SONY™ CAM CORDERS

Picture	Model/Description
 <ul style="list-style-type: none"> • USB Port (2.0 compliant) • Mic In thru Active Interface Shoe) • Analog Audio/Video Out (Multi A/V) • Digital Audio/Video In/Out: (i.LINK®)) <p>Supplied Accessories:</p> <ul style="list-style-type: none"> • Supplied Accessories: Power Adapter/In-Camera Charger (AC-L200), InfoLithium® Rechargeable Battery (NP-FP60), Remote Commander Remote Control (RMT-835), A/V Cable (Stereo), Picture Package™ Software ver. 1.8 and Nero Express 6 (conversion Software), USB Cable, Cleaning Cloth 	<p>DCR-DVD405 DVD Handycam Camcorder</p> <p>FEATURES</p> <ul style="list-style-type: none"> • 1/3" Advanced HAD™ CCD imagers for enhanced color quality • DVD-R, DVD-RW and DVD+RW compatibility • Carl Zeiss® Vario-Sonnar® T* lens • 2.7" wide touch panel SwivelScreen™ hybrid LCD display • Dolby Digital 5.1ch Recording <p>Specifications</p> <ul style="list-style-type: none"> • Power Consumption:7.2V (battery pack); 8.4V (AC Adaptor) • Recording and Playback Times: HQ: 20 min., SP: 30 min., LP 60 min Dimensions: 2 5/8" x 3 5/8 "x 5 3/4" (66 x 90 x 143mm) • Weight: 1 lb. 5 oz (590g) with Disc and Battery
 <ul style="list-style-type: none"> • Video I/O- (Phone Jack and S-Video) • Audio Input/Output:Stereo, Special) • i.LINK®² DV Interface (IEEE1394) • Mic In • Headphone out <p>Supplied Accessories:</p> <p>AC-L15 Power Adaptor/ In Camera Charger, NP-F330 InfoLithium® Rechargeable Battery, RMT-811 Wireless Remote Commander® Remote Control, 8MB Memory Stick® Media: 2AA Batteries, A/V Cable, Lens Hood, Shoulder Strap</p>	<p>DCR-VX2100 Digital Handycam® Mini-DV Tape Camcorder</p> <p>FEATURES</p> <ul style="list-style-type: none"> • 1/3" Advanced HAD™ 3 CCD imagers with 380k gross pixels each • 12X optical zoom lens with 48X digital zoom • Aspherical ground glass 58mm lens • Manual zoom and focus rings • Super SteadyShot® optical stabilization system <p>Specifications</p> <ul style="list-style-type: none"> • Dimensions 4 3D 4" x 6 3D 8" x 15 1D 2" (120 x 159 x 393mm) • Weight: 3 lbs 6 oz
 <ul style="list-style-type: none"> • USB Port (1.1 compliant) • Analog Audio/Video Out (Multi A/V) • Digital Audio/Video In/Out: (i.LINK®) • S-Video I/O (optional accessory) <p>Supplied Accessories:</p> <p>Power Adapter/In-Camera Charger (ACL25), InfoLithium® Rechargeable Battery (NPFP30), Stereo A/V Cable, CD-ROM with USB Driver, (PicturePackage™ Software Ver. 1.5 for Sony), Lens Cap</p>	<p>DCR-HC26 Digital Handycam® Mini-DV Tape Camcorder</p> <p>FEATURES</p> <ul style="list-style-type: none"> • 1/6" Advanced HAD™ CCD imager with 340K effective pixels • 20X optical zoom lens with 800X digital zoom • Carl Zeiss® Vario-Tessar® T* lens • 2.5" touch panel SwivelScreen™ LCD • Super SteadyShot® Picture Stabilization System <p>Specifications</p> <ul style="list-style-type: none"> • InfoLithium® with AccuPower™ Meter System (NP-FP30) • Dimensions: 3/8" x 2 3/4 "x 5 7/8" (82 x 69 x 149mm) • Weight: 1 lb. 6 oz (615g) with Battery

SONY™ CAM CORDERS

Picture

Model/Description



- USB Port (2.0 compliant)
- Mic In thru Active Interface Shoe)
- Analog Audio/Video Out (Multi A/V)
- Digital Audio/Video In/Out: (i.LINK®)

Supplied Accessories:

- Supplied Accessories: Power Adapter/In-Camera Charger (AC-L200), InfoLithium® Rechargeable Battery (NP-FP60), Remote Commander Remote Control (RMT-835), A/V Cable (Stereo), Picture Package™ Software ver. 1.8 and Nero Express 6 (conversion Software), USB Cable, Cleaning Cloth

DCR-HV 96 Digital Handycam® Mini-DV Tape Camcorder

FEATURES

- 1/3" Advanced HAD™ (Hole Accumulation Diode) CCD with 2050K (effective) pixels • 10X optical zoom lens with 120X digital zoom • Carl Zeiss® Vario-Sonnar® T* lens • Digital Still Memory mode with Memory Stick Duo™

Specifications

- Power Consumption: 7.2V (battery pack); 8.4V (AC Adaptor)
- Recording and Playback Times: HQ: 20 min., SP: 30 min., LP 60 min
- Dimensions: 2 5/8" x 3 5/8" x 5 3/4" (66 x 90 x 143mm)
- Weight: 1 lb. 5 oz (590g) with Disc and Battery



GV-D1000 MiniDV Video Walkman® VCR

FEATURES





- 4" LCD display¹ for viewing you MiniDV video on the go • Built-in Memory Stick® terminal for still image capture • USB streaming for sharing your video over the internet • MPEG Movie Mode allows you to capture MPEG1 video directly to Memory Stick® media • Analog to Digital conversion with pass through

Supplied Accessories:


- AC-L10 Power Adapter, AV Cables, RMT-811 Remote Commander®, 2 AA batteries, CD-ROM Drivers (PIXELA ImageMixer 1.0)

- Video I/O: Mini Jack x 1 (Input),
- RCA Composite (Output)
- S-Video Input/Output:
- Audio Input/Output: Mini Jack x 1
- i.LINK® DV Interface (IEEE 1394):
- USB: In/Out
- Headphone Jack: Stereo (Mini)
- Control L (LANC) Stereo (Mini)





SONY™ STUDIO HEADPHONES

Picture	Model/Description
	<p>MDR-7502 Small diaphragm headphones. Headphone features include 30mm driver unit, closed ear design. Frequency response: 60Hz to 16kHz, Sensitivity: 98 db/mW</p>
	<p>MDR-7505 Small diaphragm foldable headphones. Headphone features include folding construction, 40mm driver unit, closed ear design. Frequency response: 10Hz to 25kHz, Sensitivity: 105 dB/mW Supplied Accessories: Carrying case</p>
	<p>MDR-7506 <u>Large diaphragm</u> foldable headphones. Headphone features include rugged design, folding construction, 40mm driver unit, closed ear design. Response: <u>5Hz to 30kHz</u>, Sensitivity: 106 dB/mW Supplied Accessories: Carrying case</p>
	<p>MDR-7509 <u>Large diaphragm</u> studio-reference full-cup headphones. Headphone features include rugged design, folding construction, 40mm driver unit, closed ear design. Response: <u>10Hz to 20kHz</u>. Supplied Accessories: Carrying case</p>


SONY Fontopia® HEADPHONES

	<p>MDREX71SL Super-Light In-The-Ear Design New, Super-Small 9 mm Drivers Soft, Silicon Earbuds . Response: : 6 - 23,000 Hz Weight: 0.1 oz. (4g), without cord Supplied Accesories: Carrying case Second set of earpads</p>
-------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

SONY™ HEADPHONES - DJ - Street - Wireless - Noise Cancelling

Picture	Model/Description
	<p align="center">MDR-V700DJ Disc Jockey Headphones</p> <ul style="list-style-type: none"> • <u>Large diaphragm</u> DJ headphones. • Neodymium Magnet • Impedance 24 ohms • Sensitivity 107 dB/mW • Power Handling Capacity 3000 mW • Frequency Response 5 — 30,000 Hz • Headbandwide, adjustable single headband with folding earcups • Earcups swivel and reversible for single-sided monitoring • auto-return mechanism • 50mm drivers • Supplied Accessories: Carrying case
	<p align="center">MDR G42 LP Street Style® Headphones; Behind-the-neck headband</p> <ul style="list-style-type: none"> • Drive Unit: 30 mm • Diaphragm: PET • Impedance: 24 ohms • Frequency Response: 16 - 20,000 Hz • Headband: Behind-the-neck, Single • Cord: Oxygen-free copper; Single-sided, 5 feet (1.5 m) • Plug: L-Shaped, stereo mini plug • Audio sensitivity: 104 dB/mW • Magnet: Ferrite • Power Handling Capacity: 1000 mW
	<p align="center">MDR-RF960RK Wireless Headphones</p> <ul style="list-style-type: none"> • 150 foot range. 900 MHz Radio Frequency (RF) Transmission. • Rechargeable NiMH batteries. • 30mm diameter, dome type • Automatic tuning • RF Carrier Frequencies: Ch.1: 913.5 MHz Ch. 2: 914.0 MHz Ch. 3: 914.5 MHz • Frequency Response: 20-20,000Hz • Sensitivity: 105 dB/mW • Power AC 120Vm 60Hz when used with supplied AC power adapter which connects to the DC 9V jack. • UniMatch® plug adapter • Weight: Headphones: 9.5 oz w/battery Transmitter: 6.7 oz (195g) • Dimensions: Transmitter: 5.2" x 4.9" x 5.35" (133 x 124 x 136mm)
	<p align="center">MDR-NC6 Noise Cancelling Headphones</p> <ul style="list-style-type: none"> • Reduces outside noise by 70% (10db) • Slim Swivel Folding Style • Impedance: Power On: 20 ohms at 1kHz; Power Off: 65 ohms at 1kHz • Frequency Range: 10 dB at 300 Hz • Noise Reduction: 40 - 1,500 Hz • Single AA battery required.)

SONY Microphone

	<p align="center">ECM 719 Miniature Stereo Microphone</p> <ul style="list-style-type: none"> • For Table-Top or Clip-On Us • Back Electret Condenser Pickup Capsules • Frequency Response: 100 Hz - 15 kHz • Mode Switch (music/speech) • Effective Output Level: -47dB, ±4dB (0dB = 1V/Pa, 1 kHz) • Output Impedance: 1.5k ohms ±30%, unbalanced • Maximum Sound Pressure Input Level: >110dB SPL • Dynamic Range: 80dB
-------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------



Starin is also your source for Sony professional audio & video





Professional AV Representatives

Strategic Manufacturers Group

P: 847-251-2765
F: 847-251-2906

Starin Marketing, Inc.

P: 219-929-4127
F: 219-929-4377



BC Electronics Sales Inc

P: 913-962-1990
F: 913-962-0718

Cowser-Lee Marketing

P: 817-572-6433
F: 817-478-5262

Sony Video

Nu-Way Technologies

P: 334-222-8950
F: 334-222-4317

Sony Audio

Quest Marketing

P: 305-993-1213
F: 305-993-1217

ALL SALES

All accounts are COD Certified/CIA/MasterCard/Visa until credit is approved. If credit is approved, terms will be COD (Company Check) or NET 30 as determined by credit department.

PAYMENT TERMS

30-day terms are allowed on credit approved accounts. Payments paid within the terms are defined as those payments received and posted to your account no later than 30 days from the invoice date.

SHIPPING

FOB Starin Distributing, 1531 South Calumet Road, Chesterton, IN 46304.

MINIMUM ORDER

There is no minimum order.

PAST DUE ACCOUNTS

All invoices are due according to the terms stated on the invoice. A finance charge of 1.5% per month will be assessed on the unpaid balance of all invoices past due. In the event a finance charge is not assessed on a monthly basis that shall not be deemed a waiver of our right to assess such charges at a later date. Accounts extending 45 days beyond the invoice date may be placed on COD Certified, CIA or Credit Card status. Accounts extending 65 days may be referred to an agency for collection.

RETURNED CHECKS

A \$30 charge is applied to all checks returned for insufficient funds and discount privileges are forfeited on applicable invoices.

DEFAULT

In the event collection is required for past due invoices and accounts, you agree to pay reasonable costs and attorney fees incurred.

SHORTAGES OR DAMAGED SHIPMENTS

All shortages or damaged shipments must be noted on carrier's bill of lading or similar document. A claim against the carrier must be filed per ICC regulations and we must be notified in writing within 10 days of the invoice date.

RETURN POLICY

A return authorization (RA) number must accompany all merchandise returned for credit. A 25% restocking charge may be assessed on all returned goods. Special Orders may not be returned.

REPAIR/RETURN POLICY

Repairs of defective merchandise under warranty should be arranged between the end user and the manufacturer. Merchandise should not be returned to Starin Distributing for repair unless instructed to do so. A return authorization (RA) number must accompany all merchandise returned for repair along with information that will assist in the diagnosing of the problem.

PRICING POLICY

Prices are subject to change without notice.

DEALER AGREEMENTS

Select brands require a signed dealer agreement before any product can be shipped

MAP POLICY

Minimum Advertised Price ("MAP") unilaterally sets the MAP on all products (where it is listed) by all means of solicitation, including electronic or print means, including facsimile, Internet Web Site, On-Line Service, Newspaper, Magazine, Newsletter, Direct Mailing, or similar means. Dealers who advertise products below MAP pricing will be terminated immediately.