SONY

DCR-HC42

NEW

▲ Step-up Feature

New Feature

The DCR-HC42 is stylish yet feature packed with a supplied Handycam Station for the convenient ability to share your memories and charging your battery. Along with a 1 Megapixel CCD Imager and 2.7" Wide (16:9) Hybrid Touch Panel LCD your memories will be enhanced with more video captured.

۸ 1.0 Megapixel (Gross) Advanced HAD™ CCD - Super SteadyShot® Picture Stabilization Imager

1/5.5" Advanced HAD™ (Hole Accumulation Diode) CCD with 690K (effective) pixels provides stunning detail and clarity with exceptional video (up to 520 lines of horizontal resolution) and still image performance. The Megapixel technology enhances your digital videos and digital still photography performance.

MiniDV Recording

Offers up to 520 lines of horizontal resolution, 3X the color bandwidth and a significantly higher signal/noise ratio, to provide spectacular video performance.

12X Optical/480X Digital Zoom

The optical zoom helps to bring the action close up from far away. In addition, with the Digital Zoom and interpolation means that extreme digital zooming is clearer, with less distortion than previous types of digital zooms.

Professional Quality Carl Zeiss® Vario-Tessar® Lens

Carl Zeiss lenses have an advanced optical multi-layer coating that offers less glare and flare with increased contrast. This results in vivid image brilliance, true-to-life color saturation and perfect renditions of subtle tones.

Progressive Shutter System

A mechanical shutter system that provides progressive scan performance while utilizing an interlaced scanning system. Digital still images will be sharp and clear with excellent definition.

Analog To Digital Conversion with Pass-Through

Convert and/or record any analog NTSC video source to digital video via the analog inputs. Analog NTSC video can also be passed through the digital Handycam Camcorder directly into a PC via the i.LINK interface in real-time for easy PC editing of your analog footage.

System

Picture stabilization system that uses motion sensors to detect and compensate for camera "shake" without compromising picture quality like some other digital stabilization systems.

2.7" wide Touch Panel SwivelScreen™ LCD Display (123K Pixels)

Provides excellent viewing clarity for both 16:9 and 4:3 apsect with improved resolution. The high resolution 123K pixel LCD screen rotates up to 270 degrees for multiple viewing angles providing sharp, detailed images for monitoring or playback.

Handycam Station

The supplied Handycam Station provides quick and easy connections to a TV for viewing or to a PC for editing and sharing video. Just placing

USB Streaming

internet using the USB interface. You can even

i.LINK® DV Interface¹

capture cards and PCs.

InfoLithium® Battery with AccuPower™ Meter System²

MiniDV Handycam® Camcorder

Charge the battery at anytime because unlike NiCad (Nickel Cadmium) batteries, Sony's rechargeable Lithium Ion batteries are not subjected to a life shortening "memory effect". Sony's exclusive AccuPower™ meter displays the battery time remaining in minutes, in either the viewfinder or on the LCD screen.

Digital Still Memory Mode with Memory Stick Duo™ Media³

Capture still images up to 1152x864 resolution, directly onto Memory Stick Duo™ Media for easy transfer to PCs for emailing, printing or sharing with other compatible Memory Stick[™] devices.

Tele Macro Function

Useful for shooting close up shots, but without having the camcorder casting a shadow on the subject. Images shot in the Tele Macro Mode will have the subject properly focused with the background unfocussed so that the subject stands out.

Active Interface Shoe

Provides a location directly on the camcorder on which to add optional accessories while providing power and two-way communication to those accessories

Stamina® Battery Power Management -System

Using the optional NP-FP90 InfoLithium® Battery, the DCR-HC42 can continuously record for up to 8 hours on a single full charge, providing extra long battery life.

Super NightShot® Plus Infrared System With Sony's Super NightShot Infrared System you can capture natural looking video, even when shooting in low light. Record subjects up to 20 feet away using the built-in infrared system, but without the overall monochrome color common with earlier low-light recording systems.

















worryfreedigitalvideo

like.no.other™

нлпруслт

the camcorder on the Handycam Station instantly makes the connections. No need to search for cables or wires when charging or playing back.

Stay connected to family and friends by broadcasting live video with audio over the playback your favorite recorded scene on the camcorder's tape. It's like having your own video conferencing system.

A digital high-speed bi-directional interface which provides Audio/Video communication between two compatible devices. This connection allows for pure digital transfer between devices equipped with an IEEE1394 interface, such as camcorders, digital VTRs,

DCR-HC42

MiniDV Handycam® Camcorder

(ACC-DV)

optional accessories

High Capacity InfoLithium™ Batteries

Adaptor/Quick Charger (ACV-QP10 AC)

High-Grade Telephoto Lens (VCL-HG2025)

(NP-FP50/FP70/FP90)

AC/DC Adaptor (DCC-L50B)

Carrying Case (LCS-VA4)

Carrying Case (LCS-VA5)

Telephoto Lens (VCL-2025S)

Wide Angle Lens (VCL-HG0725)

Wide Angle Lens (VCL-0625S)

Lightweight Tripod (VCT-R610)

Pocket Tripod (VCT-TK1)

Handycam Camcorder Starter Kit for MiniDV

additional features

Program AE (Auto Exposure) Modes -

- _ Picture Effects
- Battery Information _
- -Manual Focus
- _ Easy Handycam Button

specifications

USB Streaming: Yes SteadyShot® Image Stabilization: Yes, Super SteadyShot

Accessory Shoe: Yes, Active Interface White Balance: Auto/Outdoor/Indoor/One-push Memory Stick PR0[™] Media Compatibility: Tested to support up to 1GB media capacity³ ; does not support high speed transfer function; does not support Access Control security function. Low Light Capability: Super NightShot Plus

Interface: Interface Connector for Handycam Station:Yes Viewfinder: Color, 123K Pixels Imaging Device: 1/5.5" 1070K Gross Pixel CCD Still Actual: 1000K Pixels LCD: 2.7" Wide (16:9) Color (123K) USB Port(s): Yes (On Handycam Station) LANC Terminal: Yes Digital Audio Input(s): Yes Digital Video Input(s): Yes Digital Video Output(s): Yes (Special) Digital Audio Output(s): Yes (Stereo, Special) Headphone Output(s): N/A Input(s): Microphone N/A Minimum Illumination: 7 Lux (0 Lux with NightShot Plus Infrared System)

Lens Type: Carl Zeiss® Lens:

- Vario-Tessar®:Yes
- Zoom: 12X, 480X (Digital)

Focus: Full Range Auto/Manual (Touch Panel) 35mm Conversion: 44-880mm (4:3)-Camera

- 48-960mm
- (16:9)-Memory
- 44-880mm

(4:3)-Camera

Focal Distance: 23-46mm; 390mm(Telemacro)

Aperture: 1.8-2.5

Exposure: Yes, Touch Panel (24 steps) Shutter Speed: 1/2-1/4000 (AE Mode)

Power Consumption: 2.6W/3.0W/3.2W

(VF/LCD/VF LCD)

Limited Warranty: 1 Year Parts; 90 Days Labor Video Actual: 690K Pixels Filter Diameter: 25mm Weight: 14 oz (397 g) w/out Tape and Battery Dimensions (WHD): 2 1/4" x 3 5/8" x 4 1/2"

(54.7 x 90 x 111.7mm) Supplied Accessories: Power Adapter/In-Camera Charger (AC-L25)

InfoLithium® Rechargeable Battery (NP-FP50) Handycam® Station (DRCA-C121) Remote Commander® Remote Control

1. i.LINK is a trademark of Sony, used only to designate that a product contains an IEEE1394 connector. All products with an IEEE1394 connector may not communicate with each other. 2. Designed for use with compatible Sony InfoLithium® batteries.

3. Available storage capacity of Memory Stick and Memory Stick PRO media may vary. A portion of the memory is used for data management functions. Actual available memory in MBs is: 8=7.5, 16=15, 32=30, 64=61, 128=123,


256=220, 512=460

4. Battery life may vary depending upon usage patterns.

©2005 Sony Electronics Inc

Reproduction in whole or in part without written permission is prohibited. All rights reserved. Sony, AccuPower, Advanced HAD, Handycam, i.LINK, InfoLithium, Memory Stick, the Memory Stick logo, Memory Stick Duo, Memory Stick PRO Duo, NightShot, Picture Package, Remote Commander, SteadyShot, SwivelScreen, and worryfreedigital are trademarks of Sony. Carl Zeiss and Vario-Sonnar are trademarks of Carl Zeiss. PictBridge is a trademark of CIPA. Microsoft and Windows are registered trademarks of Microsoft Corporation. Macintosh is a registered trademark of Apple Computer, Inc. All other trademarks are property of their respective owners. Features and specifications subject to change without notice. Non-metric weights and measures are approximate Please visit the Dealer Network for more information at www.sony.com/dn

(RMT-831) Stereo AV Cable USB Cable Shoulder Strap	Worryfreecligitalvideo BATTERY LIFE ⁴			
CD-ROM with USB Driver (PicturePackage™ Software Ver. 1.5 for Sony)	Battery⁴ (Fully charged)	Continuous Record Time VF/LCD/LCD Backlight Off/VF+LCD	Continuous Playback Time LCD On/Off	
UPC Code: 0272426697580	NP-FP30	95/80/95/75 min	85/105 min	
	NP-FP50	105/90/105/85 min	105/135 min	
service and warranty	NP-FP70	225/190/225/180 min 225/28		
Limited Warranty: 1 Year Parts; 90 Days Labor	NP-FP90	400/345/400/320 min	400/500 min	

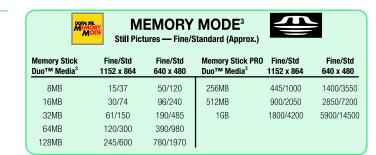



MPEG MOVIE EX MODE³

h=hours, m=minutes, s=second

Memory Stick Duo™ Media³	Email Mode (160x112)	Presentation Mode (320x240)	Memory Stick PRO Duo™ Media ^s	Email Mode (160x112)	Presentation Mode (320x240)
8MB	5m 20s	1m 20s	256MB	2h 50m 40s	42m 40s
16MB	10m 40s	2m 40s	512MB	5h 41m 20s	1h 25m 20s
32MB	21m 20s	5m 20s	1GB	11h 22m 40s	2h 50m 40s
64MB	42m 40s	10m 40s			
128MB	1h 25m 40s	21m 20s			