


C-76 & C-74



- Super-cardioid directional characteristics, rejecting indirect sound
- 2-way powering — internal battery (50 hours of continuous operation) or external power supply
- RF condenser design for low noise level

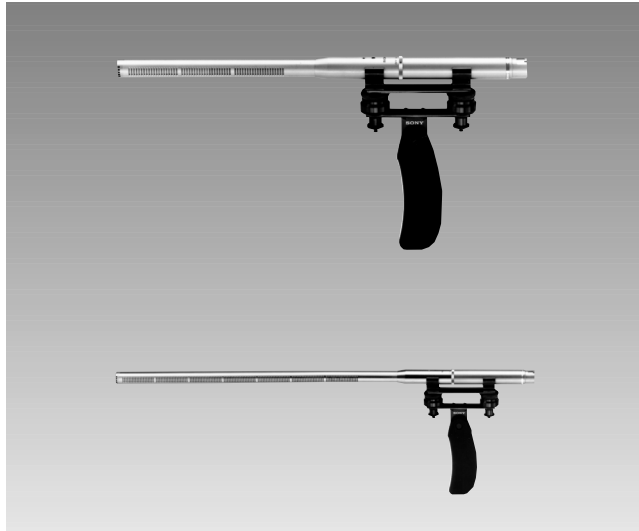