## SONY

# **BLACK & WHITE MONITOR**

# SSM-125

BLACK & WHITE MONITOR


- 12-inch CRT size
- Excellent picture quality with more than 750 TV line horizontal resolution
- Dual loop-through video inputs, with switchable 75 $\Omega$  termination
- DC clamp switch provides a stable reference for the black level
- Front controls: Power, INPUT select, H-hold, V-hold, contrast and brightness
- Faster horizontal AFC reduces flagging on time lapse VCR playback







## SSM-125

### **BLACK** & WHITE **MONITOR**



#### System Connections

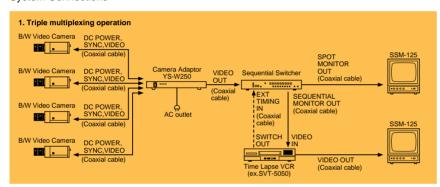

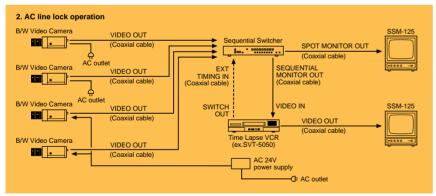

## **SPECIFICATIONS**

SSM-125

Video signal system: EIA standard

Picture tube: 12-inch B/W measured diagonally, 90° deflection

Video input: Impedance  $75\Omega$  high switchable Level 0.5-2.0Vp-p/75Ω, sync negative, BNC-type (x 2)

**Video output:** Impedance more than  $10k\Omega$ , loop-through,

BNC-type (x 2)

Horizontal resolution: More than 750 TV lines (at center)


Power requirements: AC 120V, 50/60Hz

Power consumption: 30W

Operating temperature: 0 to 35°C (32 to 95°F) Storage temperature: -10 to 40°C (14 to 104°F)

Mass: 9.2kg (20 lb 5 oz)

**Dimensions:** 



#### **Optional Accessory:**

SMB-121: 19" rack kit (7 rack units high)

© 1998 Sony Electronics Inc. All rights reserved. Reproduction in whole or in part without written permission is prohibited. All specifications are subject to change without notice. Sony and Nothing Escapes Us are trademarks of Sony.



Printed in U.S.A. 03/98 S-SSM125

Sony Security Systems Business and Professional Group 1 Sony Drive Park Ridge, New Jersey 07656-8003 TEL: (201) 358-4954 • FAX: (201) 358-4927

