


SONY®

NTSC

Digital Videocassette Recorder
DSR-2000

For Professional Results

DVCAM™

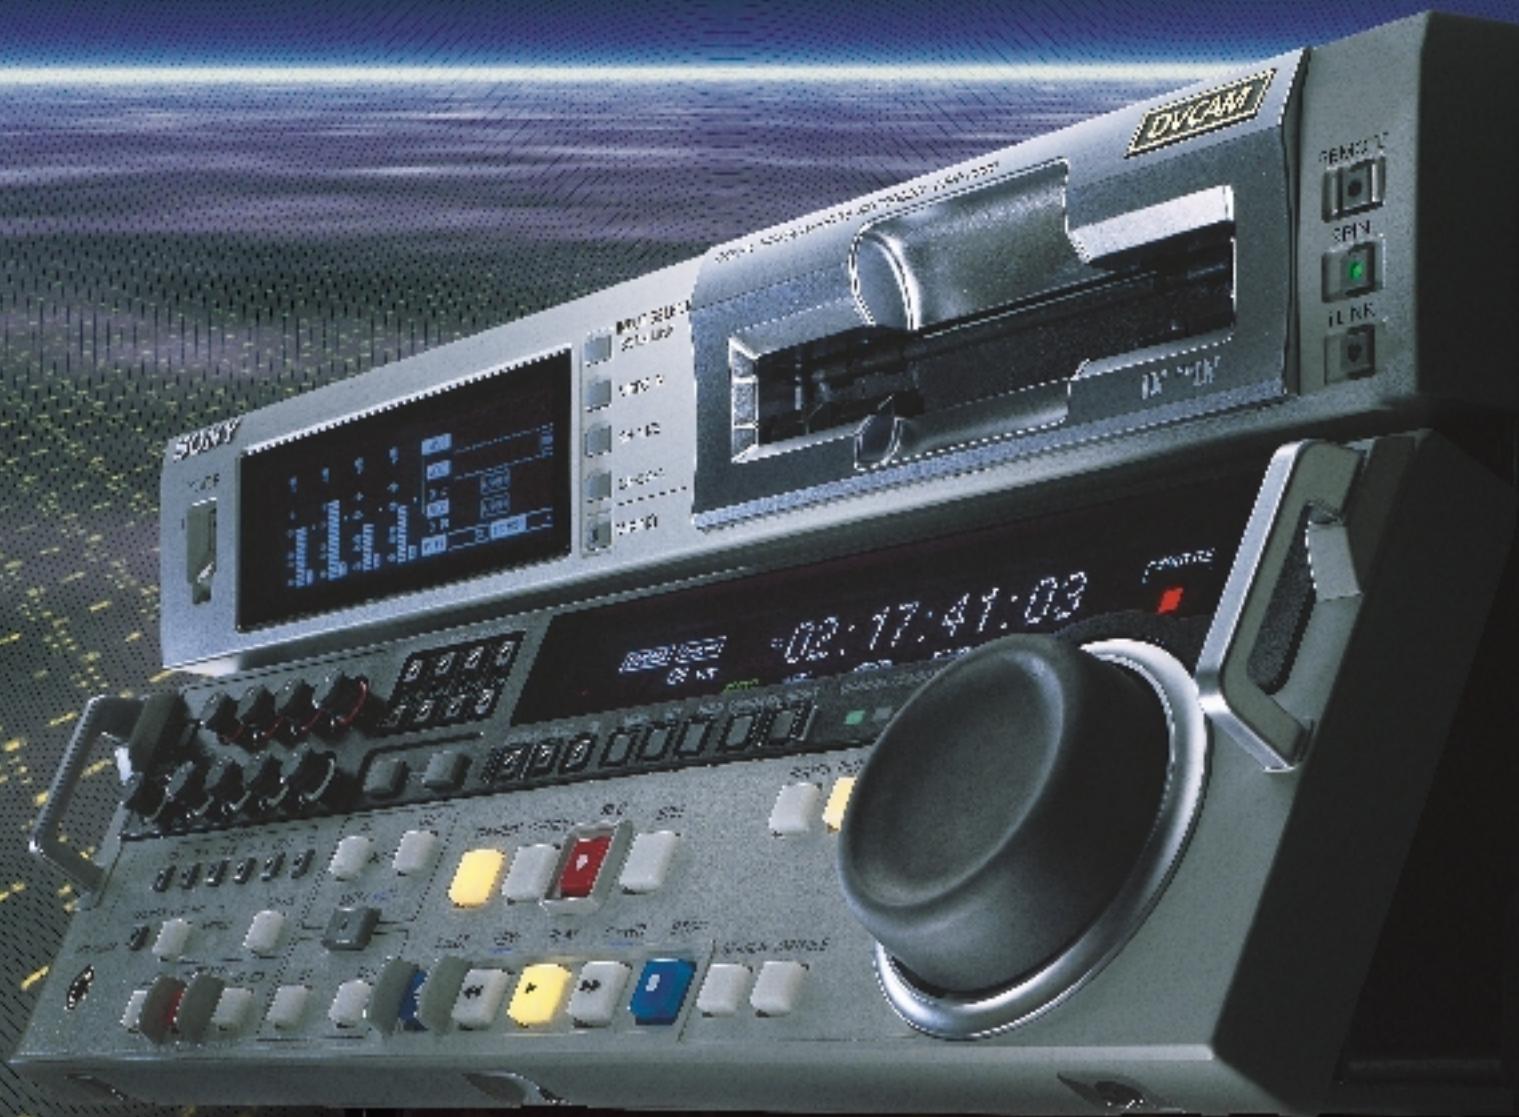


Beyond Your Expectations. The DVCAM Digital Solution for You.

Video production styles have diversified in response to the sudden and massive growth in visual data needs. In this type of environment, it is clear that a VTR that meets various demands for higher productivity and greater creativity in professional video production is eagerly needed. That's why Sony is proud to present you with our top-of-line DVCAM Editing Recorder – the DSR-2000.

Ideal for professional use as well as ENG use, this innovative unit is designed to support all DV (25 Mb/s) format recorded tapes, including DV tapes recorded in LP mode and DVCPRO tapes. The DSR-2000 also has industry-leading performance features such as preread editing, never before offered in a 1/4-inch (6.35 mm) VTR. Additional advantages include a built-in Jog/Shuttle dial that allows two-machine editing and DMC (Dynamic Motion Control) for noiseless slow-motion playback.

Filled with professional features and a functionally designed front panel that put editing controls at your fingertips, the DSR-2000 is the ideal choice for today's demanding video production applications.

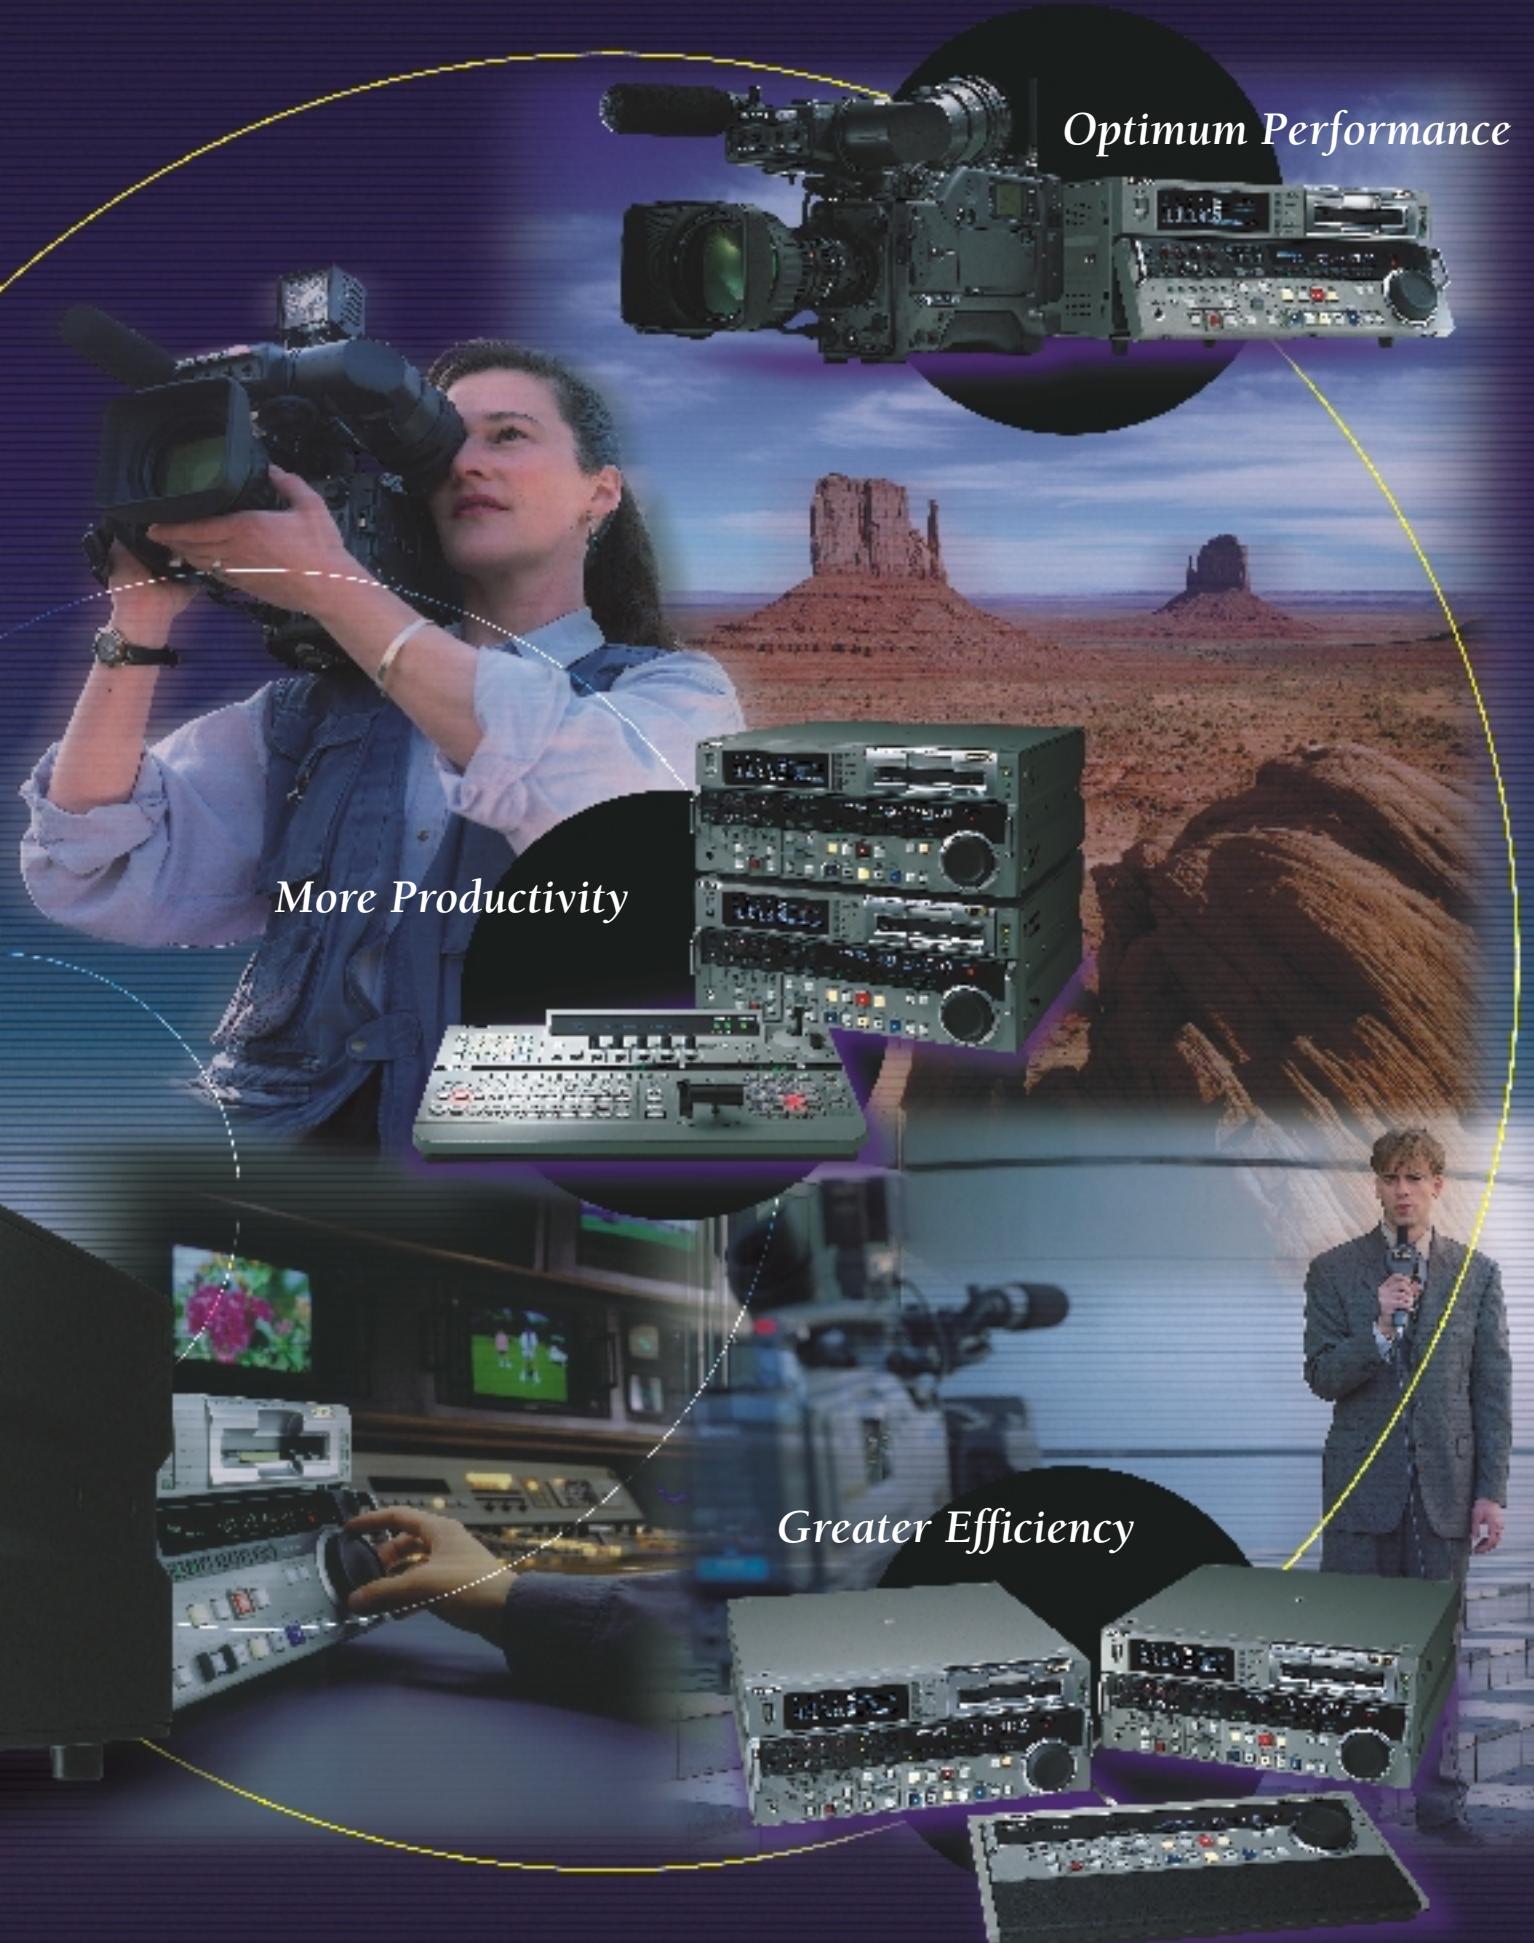

Optimum Performance

More Productivity

Greater Efficiency

Main Features

The DVCAM Format


The DSR-2000 employs the DVCAM format which is the professional extension of the world-wide standard DV format.

Digital Component Recording for Excellent Picture Quality

The DVCAM format uses 8-bit digital component recording with a 5:1 compression ratio which is identical to the DV format. It also offers a sampling rate of 4:1:1 for excellent picture quality and superb multi-generation performance.

The DVCAM format utilizes an intra-frame compression scheme and is based on DCT (Discrete Cosine Transform) techniques with each frame consisting of 10 tracks. Each track has video, audio, ITI (Insert and Track Information) and sub-code sectors. It is the combination of ITI – a reference signal used for precise tracking – and time code on the sub-code sector that helps to assure highly accurate editing performance.

Track Pattern of the DVCAM Format

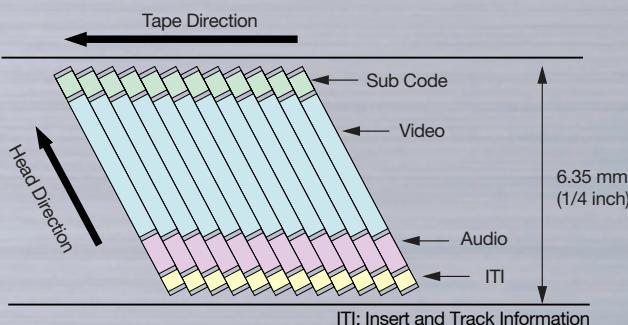

High-Quality Digital Audio

The DVCAM format also offers superior digital audio performance comparable to CD quality, thanks to a wide dynamic range and excellent signal-to-noise ratio. There are two selectable audio channel modes: a two-channel mode with 48 kHz/16-bit recording or a four-channel mode with 32 kHz/12-bit recording.

Recording Capability of Up to Three Hours

DVCAM videocassette tapes are available in two sizes: standard and mini. The standard size cassette provides a recording time of up to 184 minutes while the mini size cassette provides up to 40 minutes. The long recording times of these very compact cassettes that have a tape width of 1/4-inch (6.35 mm) is made possible through Sony's advanced Metal Evaporated tape technology.



Mini



Standard


Playback Compatibility with All DV (25 Mb/s) Formats

The DSR-2000 boasts playback compatibility with all DV (25 Mb/s) format recorded tapes. This is especially useful because home-use DV products are now widely used in professional video applications due to their compact portability and superior picture quality. For maximum versatility in a wide range of video editing environments, the DSR-2000 is designed to play back DVCAM tapes, DV tapes recorded in both SP/LP modes, and even DVCPRO tapes* without requiring any adaptor. Moreover, it is possible to use these tapes directly as editing source material or dub up to other formats.

This unique compatibility saves time and improves productivity as it eliminates the need to use different VTRs for each format.

*Not compatible with the SDTI (QSDI™) and i.LINK™ (DV In/Out) interfaces.

Playback All DV (25 Mb/s) Format Tapes

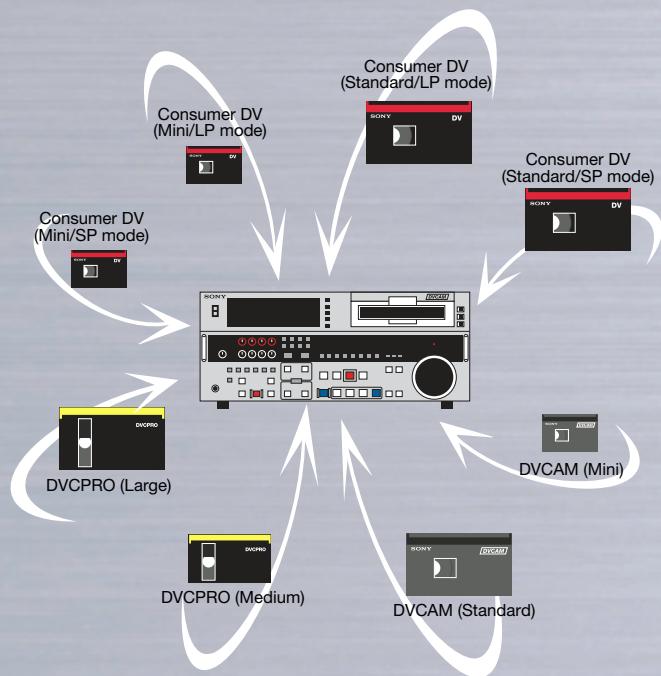

**Digital Videocassette Recorder
DSR-2000**

Main Features


■ Excellent Editing Performance

Preread Editing Capability

Thanks to newly developed digital processing, the DSR-2000 offers preread editing capability* never before offered on a 1/4-inch (6.35 mm) VTR. Since preread heads are positioned ahead of record heads on the drum, they scan previously recorded video and audio signals that are then recorded back onto the same track.

This feature provides many advantages such as A/B roll editing (MIX and WIPE only) using two VTRs and a sound-on-sound capability as well as audio cross-fade function for clean audio transitions at editing points. In addition, audio mix/swap and over-dubbing of audio are available without the delay between video and audio.

*Not available for SDTI (QSDI) and i.LINK interfaces as these handle compressed signals.

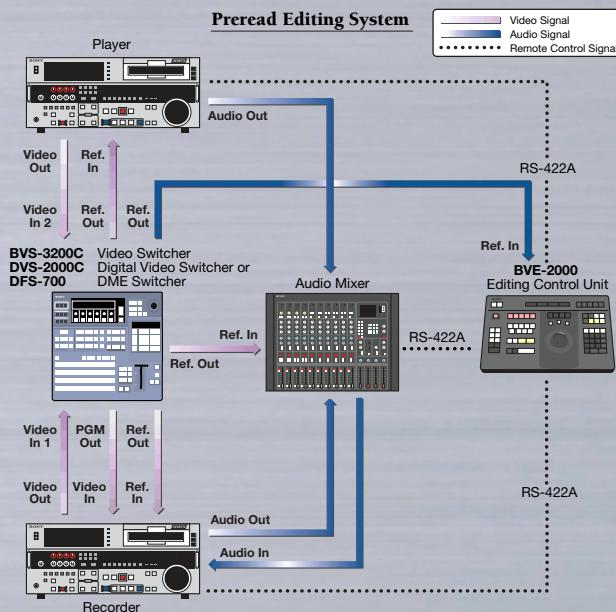

VTR-to-VTR Editing

The front panel features a built-in Jog/Shuttle dial that provides convenient two-machine editing without external controllers. By connecting the DSR-2000 to VTR with an RS-422A or i.LINK™ (DV In/Out) interface, an editing system with an editing precision of ± 0 frames can be created. Additionally, the optional DSBK-200 Control Panel enables remote operation from a distance of up to 10 meters (approx. 33 ft.).



Wide Range of Digital Slow Speed

The DSR-2000 offers a variable speed playback function with the range of -1 to +1 times. Within this wide range, the DSR-2000 plays back noiseless digital slow images with smooth jog sound to make it easy to designate editing points. This feature can be applied when using any DV (25 Mb/s) format recorded tapes.

DMC (Dynamic Motion Control)

Equipped with Sony's innovative DMC, the DSR-2000 provides noiseless slow-motion playback from -1 to +1 times normal speed. For a two-machine editing system, the DSR-2000 can memorize the variable speed range of a designated portion on the player side and execute editing* with slow-motion images. Additionally, DMC makes it possible to control VTRs equipped with Dynamic Tracking (DT™) from the DSR-2000.

*The SDI interface is recommended for DMC editing. The SDTI (QSDI) and i.LINK interfaces are not suitable for this use, since they handle the compressed signal.



DSR-2000 Front Panel

Versatile Interfaces

Analog Interfaces

Incorporating comprehensive analog interfaces for both video and audio, the DSR-2000 interfaces with current analog equipment to ensure smooth upgrading to future digital systems. Composite, component, S-Video (Y/C) for video, and XLR audio interfaces are provided.

Digital Interfaces

The DSR-2000 also has a full range of standard digital interfaces such as SDI, SDTI (QSDI™) and AES/EBU, as well as optional i.LINK (DV In/Out) and SDTI-CP (MPEG Out)* interfaces.

Taking advantage of these digital interfaces, the DSR-2000 offers full access to a wide variety of digital equipment like the SDI-based editing system with the Betacam SX™ or Digital BETACAM™ formats, a cut editing system with the Sony DSR-500WS DVCAm Camcorder or consumer DV camcorders via i.LINK interface, and much more.

*The SDTI-CP (MPEG Out) interface will be available in the future.

- The SDTI (Serial Data Transport Interface) is defined as SMPTE 305M.
- The SDTI (QSDI) is the DV compressed signal interface which is defined as SMPTE 322M.
- i.LINK stands for IEEE1394-1995 standards and their revisions.

 is the logo for products that implement i.LINK.

Remote Control Interface (RS-422A)

The DSR-2000 is fully equipped with an RS-422A interface that is the industry standard for professional editing. It allows the DSR-2000 to interface with Sony VTRs, editing controllers and the Sony EditStation™ nonlinear editing system.

Comprehensive, Convenient Functions

16:9 Aspect Ratio Capability

By receiving a wide aspect ID signal, the DSR-2000 records and plays back 16:9 aspect ratio pictures shot with the Sony DXC-D30WS Digital Video Camera, DSR-500WS or DSR-PD100A DVCAm Camcorder.

Process Control

To provide highly stable video signals, the DSR-2000 is equipped with the process control for both analog and digital outputs. This provides accurate control of video level, chroma level, chroma phase (hue), set up, Y/C delay, Sync phase and SC (Sub Carrier) phase for composite, component, S-Video and SDI outputs.



These can be also adjusted from an optional UVR-60 TBC Remote Control Unit through the Video Control port (D-sub 15-pin) on the rear panel.

VITC

In addition to TC, VITC (Vertical Interval Time Code) is supported by the DSR-2000. Since the VITC data is stored in a different portion of the tape from that of TC, the DSR-2000 handles two kinds of TC data.

Channel Condition Monitoring

The DSR-2000 has a three-color channel condition indicator, with each color representing a particular error rate threshold level. This function enables you to quickly recognize the condition of a VTR or tape for more reliable editing operation.



Built-in Signal Generator

Equipped with a built-in signal generator, the DSR-2000 can generate a color bar or black burst for video, and 1 kHz tone or mute for audio. This is very convenient for creating pre-striped tapes prior to editing.



DSR-2000 Rear Panel
(with optional DSBK-190)

Audio Level Control

In both recording and playback modes, the audio levels can be adjusted manually by using the control knobs on the front panel.

Dial Menu Operation

The DSR-2000 incorporates an initial set-up menu that provides easy accessibility and simplified operation. This set-up menu can be scrolled and modified with the search dial while monitoring Composite Video Out 3, SDI Video Out 3 or the time counter display.

Key Inhibit & Rec Inhibit

To help prevent accidental operation, the DSR-2000 is equipped with Key and Rec Inhibit functions. The Key Inhibit function disables all keys while the Rec Inhibit function makes it impossible to record onto a tape.

Flexible Input Selection

For greater flexibility during input selection, the DSR-2000 allows various combinations* of video and audio signals to be input. It is possible to select the digital interface for video and the analog interface for audio.

*The i.LINK interface cannot be combined with other signal interfaces.

When SDTI (QSDI) is selected as the audio input, the video signal is determined to be SDTI (QSDI). However, when it is selected as the video input, other signal interfaces can be selected for the audio input.

Universal Powering System

The DSR-2000 employs a universal powering system that enables the use of AC 100 V to 240 V power sources.

Closed Caption Function

With a built-in closed caption function, the DSR-2000 can record character data on the video area as video auxiliary data and add it into the vertical blanking area in playback mode. The closed caption data is input and output through the composite and SDI interfaces.

ClipLink™ Operation

The DSR-2000 supports the ClipLink system that conveys shooting data into the digital production process. During acquisition with the Sony DSR-130, DSR-300 or DSR-500WS DVCAM Camcorders, the in-point/out-point time code data of each shot and its OK/NG status can be recorded in the cassette memory of the DVCAM tape. These can be changed later on the DSR-2000 while viewing the character display of the ClipLink Log Data on the monitor. Also, by adding in/out-points from the front panel, the DSR-2000 records these as newly created Mark In/Out points. What's more, you can easily cue up to the designated points (Mark In points/Cue address) while viewing the ClipLink Log Data to perform a quick picture search.

The ClipLink Log Data can then be used to create an ideal nonlinear editing suite by integrating the DSR-2000 with the EditStation system.

Extremely Functional Front Panel Design

Incorporating an ergonomically designed front panel with a Jog/Shuttle dial and full editing keys, the DSR-2000 provides a variety of professional features, clearly making it the leading-edge product in the DSR Series.

Rugged Design Features

Triple-size Cassette Compartment

The DSR-2000 incorporates a newly designed triple-size cassette compartment to ensure compatibility with DV (25 Mb/s) format recorded tapes



of all currently existing sizes and types. Thanks to this feature, it is possible to use standard and mini size consumer DV and DVCAM cassettes as well as medium DVCPro cassettes without any adaptor. The cassette compartment is also designed for durability, providing optimum performance in demanding editing environments.

Quick, Responsive Mechanism

Quick response is an essential requirement for professional editing and the DSR-2000 provides this through the use of a reliable direct reel and drum motor mechanism. For example, in switching STILL mode to PLAY mode, response is exceptionally quick, especially for audio playback. Fast forward and rewind speeds are an impressive 85 times with a maximum search speed of 60 times during color playback.

Easy Maintenance

The DSR-2000 provides easy servicing and maintenance by incorporating a self-diagnostics function, error log and hours meter. Also, thanks to its highly durable drum, the DSR-2000 has an extended drum replacement interval (2,000 hours*).

*Recommended figure.

Other Features...

Full Tape Dubbing with ClipLink Log Data Built-in Character Generator

Application Examples


i.LINK-based Cut Editing System

- Simple and efficient cut editing with a single cable connection
- Superior multi-generation picture and sound quality via an i.LINK interface




VTR-to-VTR Editing System

- Simple and efficient cut editing
- Superior multi-generation picture and sound quality via an i.LINK interface
- Space-saving design
- Remote operation from a distance of up to 10 m via a DSBK-200

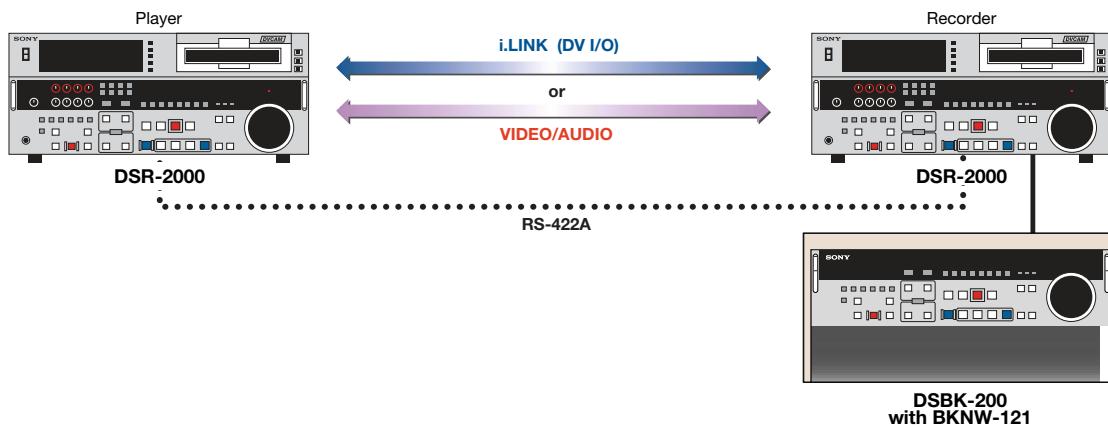

Nonlinear Editing System

- Degradation-free picture and sound quality by using an SDI or SDTI (QSDI) interface through the entire production process

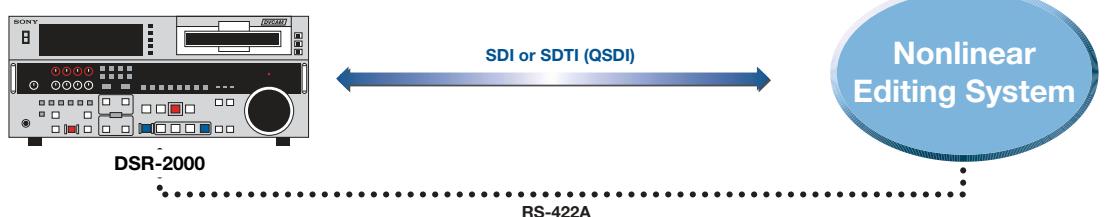

Peripheral Equipment & Optional Accessories




DSR-500WS
Digital Camcorder



DSR-130
Digital Camcorder




DSR-300
Digital Camcorder

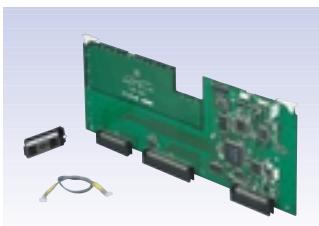

DSBK-190
i.LINK/DV Input/Output Board




DSBK-200
Control Panel

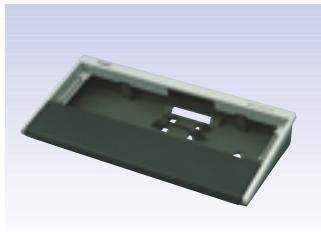

BKNW-121
Control Panel Case



ES-7
EditStation

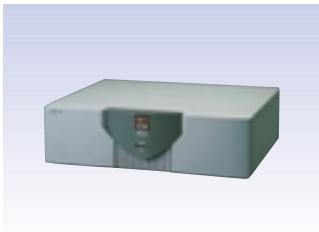

ES-3
EditStation



BVE-2000
Editing Control Unit



PVE-500
Editing Control Unit



DVS-2000C
Digital Video Switcher




BVS-3200C
Video Switcher



DFS-700
DME Switcher



UVR-60
TBC Remote Control Unit

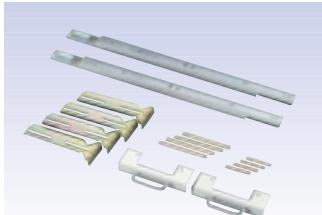


RMM-130
Rack Mount Kit



RCC-5G/10G/30G
9-pin Remote Control Cable



CCF-3L(6P*-6P) /CCFD-3L(6P*-4P)
DV Cable
*with lock

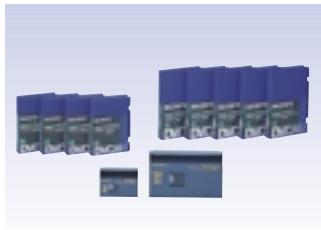

PDVM-12ME/22ME/32ME/40ME
Digital Videocassette (Mini size)
PDV-34ME/64ME/94ME/124ME/184ME
Digital Videocassette (Standard size)



PDVM-32N/40N
Digital Videocassette
(Non IC type/Mini size)
PDV-64N/124N/184N
Digital Videocassette
(Non IC type/Standard size)



PDVM-32MEM/40MEM
Digital Videocassette
(Master tape/Mini size)
PDV-64MEM/124MEM/184MEM
Digital Videocassette
(Master tape/Standard size)

PDVM-12CL Cleaning Cassette Tape (Mini size)
PDV-12CL Cleaning Cassette Tape (Standard size)

Specifications

GENERAL

Power requirements	AC 100 to 240 V, 50/60 Hz
Power consumption	110 W
Operating temperature	5 °C to 40 °C (41 °F to 104 °F)
Storage temperature	-20 °C to 60 °C (-4 °F to 140 °F)
Operating humidity	Less than 80%
Storage humidity	Less than 90%
Weight	18 kg (39 lb 10 oz)
Dimensions (W x H x D)	427 x 175 x 496.5 mm (16 7/8 x 7 x 19 5/8 inches)
Tape speed	28.193 mm/s
Recording/Playback time	
Standard size	184 min. with PDV-184ME/184N/184MEM
Mini size	40 min. with PDVM-40ME/40N/40MEM
Fast forward/Rewind time	
Standard size	Less than 3 min. with PDV-184ME/184N/184MEM
Mini size	Less than 1 min. with PDVM-40ME/40N/40MEM
Search speed	
Shuttle mode	Still to ±60 times normal speed
Digital slow mode	±1 times normal speed

VIDEO PERFORMANCE

Band width (via analog component I/O)	
Luminance	30 Hz to 5.0 MHz ±1.0 dB
	5.75 MHz +0/-3.0 dB (Typical measurement)
Chrominance	30 Hz to 1.5 MHz ±1.0/-5.0 dB
S/N ratio (via analog component I/O)	
	More than 55 dB
K-factor (K2T, KPB)	Less than 2.0%
Y/C delay	Less than 30 ns


AUDIO PERFORMANCE

Frequency response	
2CH mode (48 kHz/16-bit)	20 Hz to 20 kHz +0.5/-1.0 dB
4CH mode (32 kHz/12-bit)	20 Hz to 14.5 kHz +0.5/-1.0 dB
Dynamic range	More than 90 dB
Distortion (THD + N)	Less than 0.05%

INPUT SIGNALS

VIDEO (ANALOG)	
REF Video (BNC x 2, loop-through connection)	
	Composite, 1.0 Vp-p, 75 Ω, sync negative
Video (BNC x 2, loop-through connection)	
	Composite, 1.0 Vp-p, 75 Ω, sync negative
Component (BNC x 3)	
Y	1.0 Vp-p, 75 Ω, sync negative
R-Y	0.7 Vp-p, 75 Ω (75%)
B-Y	0.7 Vp-p, 75 Ω (75%)
S-Video (DIN 4-pin x 1)	
Y	1.0 Vp-p, 75 Ω, sync negative
C	0.286 Vp-p, 75 Ω (at burst level)

Dimensions

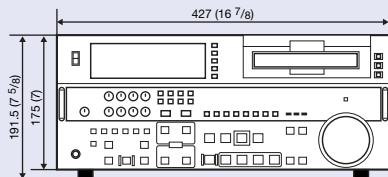

VIDEO (DIGITAL)

SDI (BNC x 2, active-through connection)	
	Conforms to Serial Digital Interface (270 Mb/s), SMPTE 259M
SDTI (QSDI) (BNC x 1)	Conforms to SDTI (270 Mb/s), SMPTE 305M/322M
i.LINK (DV In/Out) (6-pin x 1)	IEEE1394-based

* Using optional DSBK-190 i.LINK/DV Input/Output Board

AUDIO (ANALOG)

Audio (XLR 3-pin female x 4)	-6/0/+4 dBu, 600 Ω on/off/-60 dBu, high impedance
------------------------------	---

AUDIO (DIGITAL)

AES/EBU (BNC x 2)	75 Ω, unbalanced
-------------------	------------------

TIME CODE

Time Code In (BNC x 1)	0.5 Vp-p to 18 Vp-p, 3 kΩ, unbalanced
------------------------	---------------------------------------

OUTPUT SIGNALS

VIDEO (ANALOG)

REF Video (BNC x 1)	0.286 Vp-p, 75 Ω, sync negative
Video 1/2/3(SUPER) (BNC x 3)	Composite, 1.0 Vp-p, 75 Ω, sync negative
Component (BNC x 3)	

Y 1.0 Vp-p, 75 Ω, sync negative

R-Y 0.7 Vp-p, 75 Ω (75%)

B-Y 0.7 Vp-p, 75 Ω (75%)

S-Video (DIN 4-pin x 1)

Y 1.0 Vp-p, 75 Ω, sync negative

C 0.286 Vp-p, 75 Ω (at burst level)

VIDEO (DIGITAL)

SDI (BNC x 3)	Conforms to Serial Digital Interface (270 Mb/s), SMPTE 259M
SDTI (QSDI) (BNC x 1)	Conforms to SDTI (270 Mb/s), SMPTE 305M/322M
i.LINK (DV In/Out) (6-pin x 1)	IEEE1394-based

* Using optional DSBK-190 i.LINK/DV Input/Output Board

AUDIO (ANALOG)

Audio (XLR 3-pin male x 4)	+4/0/-6 dBu (selectable by menu)
Monitor (RCA x 1)	-11 dBu, 47 kΩ, unbalanced (-18 dBFS)
Headphone (JM-60 headphone jack x 1)	-∞ to -13 dBu, 8 Ω, unbalanced (-18 dBFS)

AUDIO (DIGITAL)

AES/EBU (BNC x 2)	75 Ω, unbalanced
-------------------	------------------

TIME CODE


Time Code Out (BNC x 1)	2.2 Vp-p, 75 Ω, unbalanced
-------------------------	----------------------------

REMOTE

RS-422A	D-sub 9-pin (female) x 2
Video Control	D-sub 15-pin (male) x 1
Control Panel	D-sub 15-pin (female) x 1

SUPPLIED ACCESSORIES

AC power cord x 1	
Operating instructions x 1	
RCC-5G 9-pin remote control cable x 1	

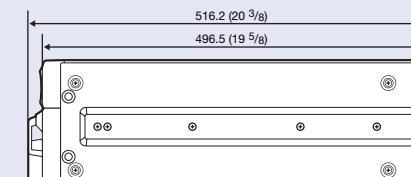

Unit: mm (inch)

Sony Electronics Inc.

Broadcast and Professional Company

1 Sony Drive

Park Ridge, NJ 07656

www.sony.com/professional

© 1999 Sony Corporation. All rights reserved.

Reproduction in whole or in part without written permission is prohibited.

Features and specifications are subject to change without notice.

All non-metric weights and measures are approximate.

Sony, DVCAM, Betacam SX, Digital BETACAM, i.LINK, QSDI, EditStation, ClipLink

and Dynamic Tracking are trademarks of Sony Corporation.

DVCPRO is a trademark of Matsushita Electric Industrial Co., Ltd.