

1-5 Monitor accessories

SS-X7A

Speaker System

- High quality stereo sound by two-way bass-reflex speaker system with cone-type woofer and tweeter .

Dimensions: 183 (W) × 280 (H) × 90 (D) mm
(7 1/4 × 11 1/8 × 3 5/8 inches)

Mass: Approx. 1.9 kg per speaker
(4 lb 3 oz)




SS-X500A

Speaker System

- Speaker design matches that of PFM-500A1W
- Can be attached to the monitor or mounted separately
- Effective frequency range: 70 Hz to 20000 Hz
- Characteristic sensitivity level: 88 dB (1 W, 1 m)
- Input capability: 120 W

Dimensions: 159(W) × 634(H) × 90.3(D)mm
(2 1/4 × 25 × 3 5/8 inches)

Mass: Approx. 3.5 kg per speaker
(Approx. 7 lb 11 oz)

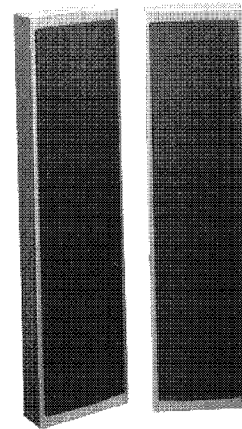



TU-1041U

TV Tuner Unit

- Receives Multi-band American TV standards VHF/UHF and Cable TV channels •DC operation capability
- Mountable with 5/8-inch monitors with the optional mounting bracket MB-512

Dimensions: 212 (W) × 49.3 (H) × 361 (D) mm
(8 3/8 × 2 × 14 1/4 inches)


Mass: Approx. 2 kg (4 lb 7 oz)

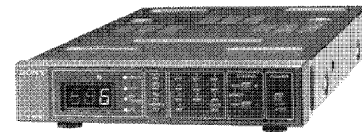

SLR-102/103A

Slide Rail Kit

- SLR-102 for PVM-14M4U/14M2U/14M2MDU/14N6U/14N5U/136/137/135 (used with MB-502B)
- SLR-103A for PVM-20M4U/20M2U/20S1WU/20M2MDU/20N6U/20N5U

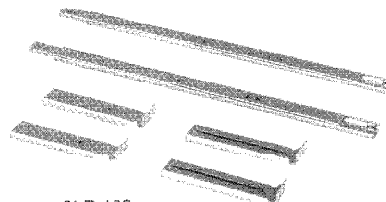

SLR-102



SLR-103A