

TELEX TECHNICAL DATA

Audiocom®

CIA-1000 Call Indicator Assembly



Standard Top-Mounted Light



Optional Front-Mounted Light

General Description

The CIA-1000 Call Indicator Assembly connects to an intercom channel and provides an attention-getting indicator light for cueing and paging. It can be activated by any call button on the channel. Also included are a set of relay contacts for activation of an external device.

The CIA-1000 can be placed on a desktop, or mounted on a wall, or placed in an equipment rack with optional Audiocom rack mounts.

Features

- Large, bright-red, flashing indicator light.
- Channel 1/2 select switch.
- Can be powered from intercom channel or via an optional PS-L wallpack (same wallpack as US2000A and ES4000A).
- Compatible with Audiocom and RTS TW Intercoms.
- Spring-clamp terminals for relay output; normal-open (NO), common (C) and normal-closed (NC) contacts.
- Top-mounted light standard. May be modified for front-mounted light.
- Rack-mountable with optional Audiocom rack mount hardware. Occupies 1/2-wide rack space. (Requires modification for front-mounted light.)
- Available in Audiocom black or RTS gray.

Specifications

Power Requirements: 12 to 15 VDC, 65 to 150 mA

Call Detect Frequency: 20 kHz (compatible with Audiocom and RTS call signalling)



Relay

Type: SPDT, with Common, Normal-open and Normal-closed contacts

Contact Ratings: 0.5A at 120 VAC; 1A at 24 VDC; 0.3A at 60 VDC

Dimensions: 2" (51 mm) high (top-mounted light) 1.75" (44.5 mm) high (front-mounted light) x 8.25" (209.6 mm) wide x 5.25" (133.4 mm) deep

Environmental: 0°C to 50°C; 0% to 95% humidity, non-condensing

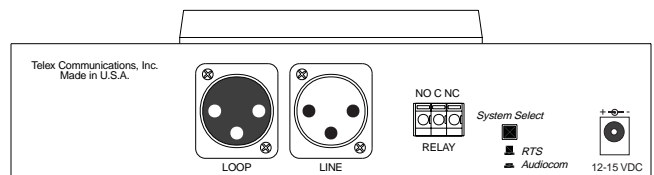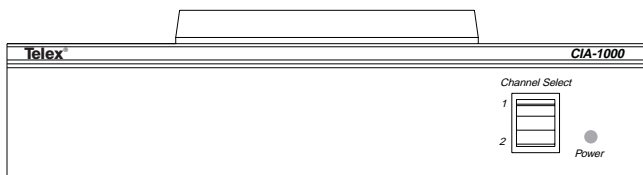

Telex Communications, Inc. 9600 Aldrich Ave. South, Minneapolis, MN 55420 Tel: 612-884-4051 Fax: 612-884-0043

Email: pro.sound@telex.com Home Page <http://www.telex.com>

© Telex Communications, Inc. 1999

Int 20476, 4/99

TELEX®