
E70/E70B

17" (16.0" VIEWABLE)
E^{2®} SERIES CRT MONITOR

WITH OSD LOCK

Affordable quality.

The 17" (16.0" viewable) ViewSonic® E70 and E70B are the smart, affordable upgrade for small, home office users and students. These stylish CRTs blend RELIABILITY AND PERFORMANCE INTO AN ATTRACTIVELY, AFFORDABLE PACKAGE. At a flicker-free 1024x768 resolution you'll get reduced eye strain while viewing spreadsheets, word processing and Internet content. The super-fine 0.23mm horizontal dot pitch produces CRISP IMAGES, VIVID COLORS AND PRECISE PICTURE DEFINITION. OnView® controls adjust your screen and secure unwanted changes to display settings with the OSD lock function. For affordable quality in a 17" (16.0 viewable) CRT, choose the ViewSonic E70 or E70B.

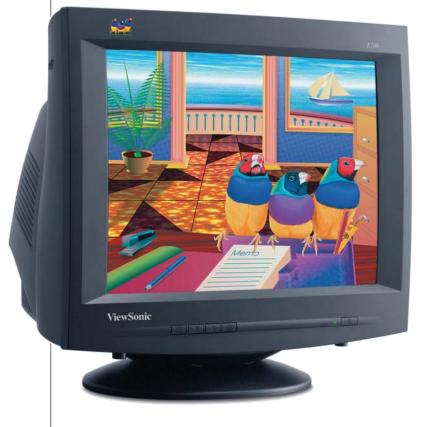

VALUE AND PERFORMANCE IN A STYLISH CRT

- > 0.23mm horizontal dot pitch/0.27mm diagonal dot pitch Ultra-fine dot pitch produces clear, crisp images with precise picture definition, even at the highest resolutions.
- > See it all with 1280x1024 maximum resolution

 With the maximum resolution of 1280x1024 you'll scroll less as you fit more on the screen. And your eyes will rest easy with a flicker-free 1024x768 resolution at 87Hz.
- > OnView® controls plus ViewMatch® color for superior screen adjustability
 Screen adjustments are made via an on-screen menu using simple controls. This user-friendly control system easily adjusts
- image quality, size, position and geometry for optimal viewing.
 OSD lock secures your settings
 When activated, user-controlled OSD lock function prevents changes to monitor settings, maintaining an optimized image.
- > Anti-static, anti-reflection screen

 This anti-static, anti-reflection screen coating refracts unwanted light away from the user while maintaining the highest quality of the displayed image.
- > PC and Mac® compatible
- > MPR II and ENERGY STAR® '05 certified Complies with strict standards of low radiation, safety and power management while saving less through automatic power saving modes.
- Three-year limited warranty 24/7 free technical and customer support.*



the choice of professionals

E70/E70B

17" (16.0" VIEWABLE) E28 SERIES CRT MONITOR WITH OSD LOCK









Available colors: Black (E70B), Beige (E70)

CRT	Туре	17" (16.0 viewable) CRT, 90° deflection
	Dot Pitch	0.23mm horizontal x 0.13mm vertical; 0.27 diagonal
	Phosphor	RGB P22 medium/short persistence
	Glass Surface	Tint: TM~50%, anti-glare, anti-static screen coating
INPUT SIGNAL	Video	RGB analog (75 ohms, 0.7/1.0Vp-p)
	Sync	H/V separated (TTL), composite
	Frequency	F _h : 30~70Hz, F _v : 50~160Hz
COMPATIBILITY	PC	VGA up to 1280x1024 (non-interlaced)
	Mac®**	Power Mac™ G3/G4/G5 up to 1024x768
CONNECTOR	Analog	15-pin mini D-sub (attached cable)
	Power	3-pin plug (IEC320)
POWER	Voltage	AC 90–264V, 50/60 Hz, auto switch
	Consumption	75W (typ)
CONTROLS	Basic	Power, on/off, 1, down, up, 2
	OnView®	Contrast, brightness, H./V. size, H./V. position, zoom, pincushion,
		pinbalance, trapezoid, parallelogram, tilt, ViewMeter®, ViewMatch®
		(9300K, 6500K, 5000K, user color), degauss, moiré reduction,
		language, memory recall
/IDEO INPUT	Bandwidth	120MHz (typ)
MISCONVERGENCE		0.25mm (max) at center; 0.35mm (max) at corner
DISPLAY AREA	Factory Setting	310mm x 230mm
HORZ. x VERT.)	Maximum Scan	325mm x 243mm (dependent upon timing signal)
PERATING	Temperature	32-104°F (0-40°C)
CONDITIONS	Humidity	5–95% (non-condensing)
IMENSIONS	Physical (mm)	410mm x 402mm x 425mm
W x H x D)	Physical (in.)	16.1" x 15.8" x 16.7"
WEIGHT		22.4 (45.0)
VEIGHT	Net	33.1 lb. (15.0 kg)
VEIGHT	Net Gross	38.5 lb. (17.5 kg)
		38.5 lb. (17.5 kg)
REGULATIONS	Gross	38.5 lb. (17.5 kg) UL, cUL, FCC-B, CB, MPR II, NOM, ENERGY STAR® '05,
REGULATIONS POWER MANAGE	Gross	38.5 lb. (17.5 kg) UL, cUL, FCC-B, CB, MPR II, NOM, ENERGY STAR® '05, ICES-003, TUV/GS, DHHS, CE, Argentina TUV/S, TUV/Ergo
REGULATIONS POWER MANAGE PACKAGE CONTE	Gross	38.5 lb. (17.5 kg) UL, cUL, FCC-B, CB, MPR II, NOM, ENERGY STAR® '05, ICES-003, TUV/GS, DHHS, CE, Argentina TUV/S, TUV/Ergo Meets MPR II and ENERGY STAR® '05 standards







ViewSonic Corporation's QMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by the British Standards Institution.



the choice of professionals

ViewSonic Corporation • 381 Brea Canyon Road, Walnut, CA 91789

Customer Service and Technical Support: (800) 688-6688 • Sales: (888) 881-8781 • SalesInfo@ViewSonic.com • ViewSonic.com

*Excluding major U.S. holidays. **Adapter may be required. Analog adapter available from ViewSonic. Specifications subject to change without notice. Selection, offers and programs may vary by country; see your ViewSonic representative for complete details. Corporate names, trademarks stated herein are the property of their respective companies. Copyright © 2006 ViewSonic Corporation. All rights reserved. [12874-008-03/06] E70-11/E70B-11