

# ViewSonic® N1500TV LCD Display


15" NextVision™ LCD TV



ViewSonic®  
See the difference.

## The multiple personality LCD TV.

Imagine the convenience and productivity of checking your e-mail while watching the morning news! With the stylish NextVision N1500TV LCD TV display. ViewSonic combines **ADVANCED NEXTVISION VISUAL TECHNOLOGY** with the finest 15" LCD screen images for unlimited viewing versatility on the desktop, countertop – or anywhere you need it. **WATCH HIGH-RESOLUTION FULL-SCREEN TV WITH 181-CHANNEL** capability. Or brilliantly display your computer application. Or do both at the same time with the picture-over-data window. ViewSonic NextVision LCD TVs expand entertainment options while delivering outstanding image quality.

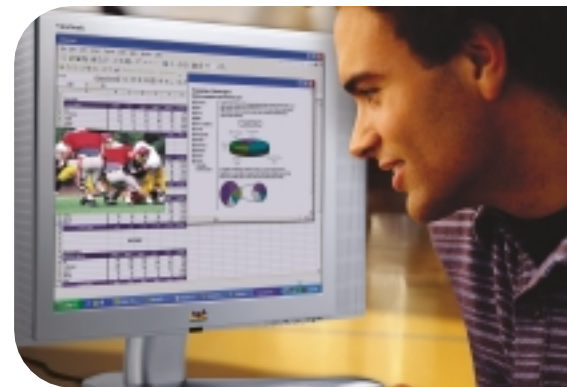

*It's a TV. It's a computer display. It's both.*

## Quality, versatility and viewing extras.

### ••• High brightness, high-quality images

High brightness 500 nits (typ) and high contrast 400:1 (typ) screen supports computer and video applications – including TV.

### ••• High-resolution LCD TV

High-resolution 4:3 format screen 1024x768 panel. Scalable resolution up to 1024x768 in video mode. 181-channel TV tuner with auto channel tuning. The convenience of a 29-function remote control.

### ••• Multiple plug-and-play connections

Easy connection of video entertainment and computer, DVD, game consoles and camcorders. 15-pin VGA computer connection, composite (RCA), S-video and component (YPbPr) video connectors, PC and audio connections.

### ••• Combo viewing

Watch a TV or video window over data, switchable to a full-screen image.

### ••• Multimedia stereo audio

Your viewing choices will sound as good as they look with two built-in 3-watt speakers plus connections to send stereo audio to your sound system.

### ••• OnView® OSD control menu

Control on-screen functions and viewing options easily and quickly with menu-driven simplicity.

### ••• Parental control

### ••• Closed caption



# More to See

# ViewSonic® N1500TV LCD Display

15" NextVision™ LCD TV



1. Integrated twin stereo 3-watt speakers
2. One-touch buttons to control all major functions
3. Space-saving slim-line design is only 3.9" thick
4. Stylish silver case
5. Rugged adjustable base stand detaches for wall-mounting (wall mount sold separately)

## LCD PANEL

<b>Type</b>	15" color TFT active matrix XGA LCD
<b>Display Area</b>	12.0" horizontal X 9.0" vertical; 15.0" diagonal
<b>Optimum Resolution</b>	1024x768
<b>Contrast Ratio</b>	400:1 (typ)
<b>Viewing Angle</b>	150° horizontal, 150° vertical
<b>Response Time</b>	16ms (typ)
<b>Brightness</b>	500 (typ) cd/m <sup>2</sup>
<b>Glass Surface</b>	Anti-glare

## VIDEO INPUT

<b>Analog</b>	RGB Analog (75 ohms, 0.7/1.0 Vp-p) TV/cable, S-video, composite (RCA), component YPbPr 3.5 mm mini stereo audio in/out and RCA (left/right) audio in
<b>Frequency Sync</b>	Fh: 30~60kHz, fv: 50~75Hz H/V separated (TTL)

## COMPATIBILITY

<b>PC</b>	Compatible from VGA up to 1024x768 non-interlaced
<b>Mac®*</b>	Power Mac™ G3/G4 up to 1024x768

## CONNECTOR

<b>Analog</b>	15-pin mini D-sub
<b>Power</b>	3-pin plug

## POWER

<b>Voltage</b>	AC 100~240V (universal), 50~60Hz
<b>Consumption</b>	60W (typ)

## CONTROLS

<b>Basic</b>	Power, enter, channel +/- and volume +/-
<b>OnView® (PC mode)</b>	Auto adjust, contrast/brightness, color adjust, information, image adjust (H/V position, H.size, fine tune), source select (PC, YPbPr, S-video, AV, TV/CATV), setup (OSD position, time out) and memory recall
<b>(Video mode)</b>	Contrast, brightness, color, tint (except YPbPr), sharpness, sound (balance, bass, treble), source select (PC, YPbPr, S-video, AV, TV/CATV) PIP (source select, YPbPr, S-video, AV or TV/CATV, H/V position, on/off), and memory recall
<b>(TV mode)</b>	Contrast, brightness, color, tint, sharpness, sound (balance, bass, treble), closed caption (OFF, C1,C2, C3,C4, T1, T2,T3, T4), source select (PC, YPbPr, S-video, AV, TV/CATV) setup (TV/CATV select, autoscans, channel add/delete, parental control) and memory recall

## OPERATING CONDITION

<b>Temperature</b>	32~104°F (0~40°C)
<b>Humidity</b>	10~90% (non-condensing)

## DIMENSIONS (W x H x D)

<b>Physical</b>	446mm x 365mm x 195mm 17.6" x 14.4" x 7.7"
-----------------	---

## WEIGHT

<b>Net</b>	9.7 lbs. (4.4 kgs)
<b>Gross</b>	15.2 lbs. (6.9 kgs)

## REGULATIONS

UL, cUL, FCC class B, ICES003, MPR II

## WARRANTY

One-year limited warranty on parts, labor and backlight



ViewSonic Corporation's QMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by the British Standards Institution.



**ViewSonic®**  
See the difference.®

ViewSonic Corporation • 381 Brea Canyon Road, Walnut, CA 91789  
Phone (800) 888-8583 or (909) 444-8888 • In Canada (866) 262-1967 • Fax (909) 839-7922 • SalesInfo@ViewSonic.com • ViewSonic.com

\*Adapter may be required. Analog adapter available from ViewSonic. Specifications subject to change without notice. Selection, offers and programs may vary by country; see your ViewSonic representative for complete details. Corporate names, trademarks stated herein are the property of their respective companies. Copyright © 2003 ViewSonic Corporation. All rights reserved. [11027-00B-03/03] N1500-1

For more product information, visit us on the web at ViewSonic.com

specifications