

# ViewSonic® VP171s/VP171b LCD Display

## 17" THINEDGE™ ULTRA-SLIM BEZEL DISPLAYS



VP171b shown.  
Also available  
in silver (VP171s).



**Broaden your horizons with this ultra-narrow frame.**

Whether you're a graphics professional, corporate executive or power gamer, the 17" VP171s and VP171b LCD displays enhance your productivity and enjoyment. Their **THINEDGE™ ULTRA-SLIM BEZEL DESIGN** enables multiple-display configurations in immaculate digital HDTV clarity for powerful multi-tasking and mixed-media data analysis. XtremeView® wide viewing angles and **CLEARMOTIV™ 8MS BROADCAST-QUALITY VIDEO RESPONSE** ensure intense visual performance. Class-leading features include comprehensive **HEIGHT, PIVOT\*, TILT AND SWIVEL** adjustments and multiple digital/analog inputs. Step up to the 17" LCD display that sets the price/performance benchmark, the ViewSonic VP171s or VP171b.



*ThinEdge design is ideal for multi-panel setups.*

**Equipped like no other 17" LCD display.**

❖ **ClearMotiv 8ms video response time**

Ultra-fast 8ms video response enables digital HD broadcast-quality full motion video.

❖ **Dynamic Structure™ Technology**

Innovative liquid crystal composition and pixel matrix accelerate video response at frame rates up to 125 fps for seamless video and intense graphics.

❖ **ThinEdge maximizes your productivity**

The ultra-slim 0.67" bezel design enhances your visual experience with clean, minimalist borders around the active image area. Suitable for tiling and stacking.

❖ **Ideal for multiple-monitor setups**

ThinEdge minimizes bezel gaps between panels for a virtually continuous viewing area in multiple-panel setups.

❖ **Pivot, height and wall-mount versatility**

VESA® wall-mount interface and detachable base for ergonomic flexibility with pivot\*, height, tilt and swivel adjustments.

❖ **Full 17" viewable screen**

❖ **1280x1024 optimum resolution and HDTV-720p compatible**

❖ **High brightness and contrast**

300-nit brightness (typ) and 500:1 contrast ratio (typ).

❖ **XtremeView 160° viewing angles**

❖ **Integrated power supply with hard power switch**

❖ **OPTISYNC™ multiple analog/digital inputs expand your connectivity**

❖ **TCO'99 and ENERGY STAR® qualified**



# ThinEdge

**ViewSonic®**   
the choice of professionals

\*Pivot function not supported by ViewSonic on Apple computers.

# ViewSonic® VP171s/VP171b LCD Display


## 17" THINEDGE™ ULTRA-SLIM BEZEL DISPLAY



**Pivot feature saves time**  
Spend less time scrolling long documents. Simply rotate your screen from landscape to portrait.



**Wide-travel height adjustment**  
With over 4 1/4 inches of travel, this LCD fits just right.

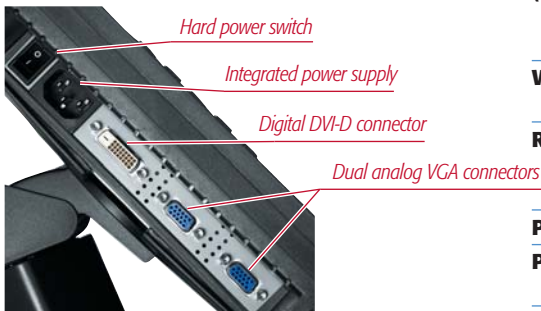

<b>LCD PANEL</b>	<b>Type</b>	17" color TFT active matrix SXGA LCD
	<b>Display Area</b>	13.3" (horizontal) x 10.6" (vertical); 17.0" diagonal
	<b>Optimum Resolution</b>	1280x1024
	<b>Contrast Ratio</b>	500:1 (typ)
	<b>Viewing Angles</b>	160° horizontal, 160° vertical @ contrast ratio > 5:1
	<b>Response Time</b>	8ms (typ)
<b>VIDEO INPUT</b>	<b>Analog</b>	RGB Analog (75 ohms, 0.7/1.0 Vp-p)
	<b>Digital</b>	DVI-D (TMDS, 100 ohms)
	<b>Frequency</b>	F <sub>H</sub> : 30~82kHz, F <sub>V</sub> : 50~85Hz
	<b>Sync</b>	H/V separated (TTL), composite, sync-on-green
<b>COMPATIBILITY</b>	<b>PC</b>	VGA up to 1280x1024 non-interlaced
	<b>Mac***</b>	Power Mac™ G3/G4/G5 up to 1280x1024. Pivot function not supported by ViewSonic.
	<b>HDTV</b>	480p, 720p
<b>CONNECTOR</b>	<b>Analog</b>	15-pin mini D-sub (x 2)
	<b>Digital</b>	Digital DVI-D
	<b>Power</b>	3-pin plug
<b>POWER</b>	<b>Voltage</b>	AC 100~240V (universal), 50~60Hz
	<b>Consumption</b>	33W (typ)
<b>CONTROLS</b>	<b>Basic</b>	Power, 1, down, up, 2
	<b>OnView®</b>	Auto image adjust, contrast, brightness, input select, color adjust (9300K, 6500K, 5400K, 5000K, user color), information (mode, model number, serial number), manual image adjust (H. size, H. position, V. position, fine tune, sharpness), setup menu (language, resolution notice, OSD position, OSD timeout, OSD background), memory recall
<b>OPERATING CONDITION</b>	<b>Temperature</b>	32~104° F (0~40° C)
	<b>Humidity</b>	10~90% (non-condensing)
<b>DIMENSIONS (W x H x D)</b>	<b>Physical</b>	392mm x 445mm x 238mm (with stand)
		15.4" x 17.5" x 9.4" (with stand)
		371mm x 309mm x 55.3mm (without stand)
		14.6" x 12.2" x 2.2" (without stand)
<b>WEIGHT</b>	<b>Net</b>	14.3 lb. (6.5 kg) (with stand); 9.2 lb. (4.2 kg) (without stand)
	<b>Gross</b>	18.7 lb. (8.5 kg) (with stand); 12.6 lb. (5.7 kg) (without stand)
<b>REGULATIONS</b>		UL, cUL, FCC-B, CB, CE, NOM, TUV/GS, TUV Ergo, (covers ISO13406-2 and MPR II), TCO'99, NEMKO, SEMKO, DEMKO, FIMKO, GOST-R, Hygienic, SASO, PCBC, VCCI, BSMI, CCC, PSB, C-TICK, TUV-S
<b>POWER MANAGEMENT</b>		Meets TCO and ENERGY STAR® standards
<b>PACKAGE CONTENTS</b>		LCD display, video cables (VGA and DVI-D), power cable, Quick Start Guide, ViewSonic Wizard CD, Portrait/Pivot CD software
<b>WARRANTY</b>		Three-year limited warranty on parts, labor and backlight



ViewSonic Corporation's QMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by the British Standards Institution.

**ViewSonic®**   
the choice of professionals

ViewSonic Corporation • 381 Brea Canyon Road, Walnut, CA 91789

Phone (800) 888-8583 or (909) 444-8888 • In Canada (866) 262-1967 • Fax (909) 839-7922 • SalesInfo@ViewSonic.com • ViewSonic.com

\*\*Adapter may be required. Analog adapter available from ViewSonic. Specifications subject to change without notice. Selection, offers and programs may vary by country; see your ViewSonic representative for complete details. Corporate names, trademarks stated herein are the property of their respective companies. Copyright © 2005 ViewSonic Corporation. All rights reserved. [12409-01B-05/05] VP171s-1/VP171b-1

For more product information, visit us on the web at [ViewSonic.com](http://ViewSonic.com)

specifications