

The SurgeArrest Notebook Pro Surge Protector features:

- **Compact, lightweight in-line design** makes the Notebook Pro a truly portable surge protector.
- **Innovative multi-voltage** (100-240 Vac) electrical design allows the Notebook Pro to operate in any country throughout the world.
- **Excess Current Detection** warns you against potential modem damage caused by excess current on many phone lines. (Excess current is often associated with digital lines).
- **AC/Telephone/Modem Protection**
- **Protection Working Indicator** warns you if the Notebook Pro's circuitry is ever damaged.
- **One time setup**— A Velcro strap is provided for convenient attachment to the AC adapter or for gathering all your power cords. Ensures you won't leave it behind!
- **Lifetime Product Warranty**
APC will replace your SurgeArrest, free of charge, if it's ever damaged by a surge or lightning strike. This will be the last surge protector you will ever buy!
- **5 year, \$5,000 Equipment Protection Policy.** (see policy for details)
- **Industry Approvals**
All SurgeArrest models carry UL and CSA safety approvals.



SurgeArrest®

New Notebook Pro Surge Protector

Works anywhere, protects everywhere. The SurgeArrest Notebook Pro Surge Protector provides a worldwide telecomputing solution with more features, performance and value.

The SurgeArrest Notebook Pro Surge Protector provides the mobile notebook professional with advanced AC and telephone line protection. The unique, in-line design creates a compact, lightweight surge protector that is truly portable and appropriate for use in any coun-

try throughout the world. With built-in Excess Current Detection, the Notebook Pro Surge Protector warns you against potential modem damage. A Velcro mounting strap and 6 ft. telephone cord eliminates the need to carry any additional accessories

*Model PNotePro
(C8 connector required)*



*The SurgeArrest Notebook Pro weighs only 8 ounces.
(actual size is: 4.9 in x 1.5 in. x 1.2 in.)*

*Model PNotePro3
(C6 connector required)*



For more information call 800-800-4APC
or visit our Web site at :www.apcc.com

APC®
Legendary Reliability™

SurgeArrest Specifications

	NOTEBOOK PRO SURGE PROTECTOR	
Features		
Model #	PNotePro	PNotePro3
Operating Voltage	100-240 Vac, 50/60 Hz	
AC line Let-Thru Voltage	<5% at 100, 120 Vac; <15% at 240 Vac	
UL Suppressed Voltage Rating (L-N)	330 V	
Surge Energy Capacity (@ 10x1000µs)	140J at 100 Vac, 120 Vac; 175J at 240 Vac	
Telephone Breakover Voltage	260Vdc	
Excess Current Detection Indicator	Yes, >140 mA	
Peak Surge Current (NM)(@ 8x20µs)	10 kA (100, 120 Vac); 6 kA (240 Vac)	
Plug Style	C8 connector	C6 connector
Weight	.5 lbs (.225 kg)	
Dimensions (L x W x H)	4.9 in x 1.5 in x 1.2 in (12.4 cm x 3.8 cm x 3.0 cm)	
Agency Approvals	UL, CSA, and FCC Part 68	
Lifetime Product Warranty	✓	
Equipment Protection Policy	\$5,000, 5 year*	

* US and Canada only.

Unique Features for Notebook Users




Excess Current Detection for telephone lines

On the road, your modem is a critical component of your notebook computer and is indispensable. Productivity is lost without it. SurgeArrest's Excess Current Detection feature will alert you to potentially dangerous current conditions on the telephone line, thereby, protecting your connection to vital information.



Mounting Strap

A Velcro strap provides secure mounting for one time setup, or the ability to gather all your cords.

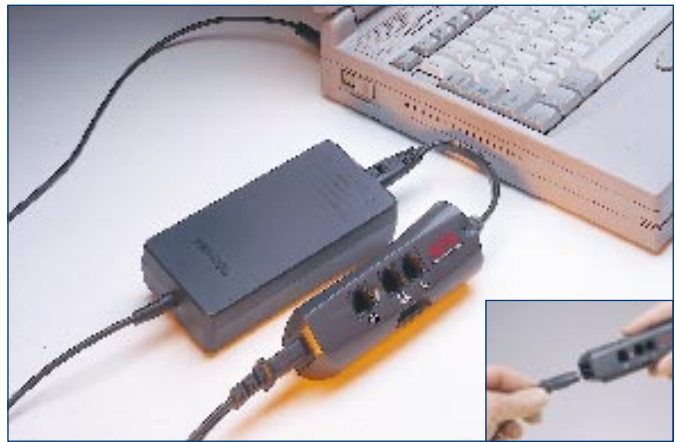

In-Line Installation

SurgeArrest's innovative design allows for convenient in-line installation. The unit easily attaches between your power adapter and the plug leading to the wall current.



Compatible with most notebooks

SurgeArrest Notebook Pro Surge Protector (PNotePro) is compatible with all two prong-style (C8 connector) adapter blocks (available on most notebook computers).



SurgeArrest Notebook Pro Surge Protector (PNotePro3) is compatible with most three prong-style (C6 connector) adapter blocks (available on many notebook computers).

Visit: www.apcc.com
E-mail: apcinfo@apcc.com
Web Support: support.apcc.com
Call: 401-789-0204
Fax: 401-789-3710

APC North America & Latin America
Corporate Headquarters
132 Fairgrounds Road
West Kingstown,
RI 02892
Call: 800-800-4APC
Fax: 800-347-FAXX

APC Europe
APC Ireland
Ballybrit Business Park
Galway, Ireland
Call: (+35)391 702000
Fax: (+35)391 756909

APC Asia/Pacific
Level 27 Northpoint
100 Miller Street
North Sydney
NSW 2060, Australia
Call: (+612) 9955-9366
Fax: (+612) 9955-2844

APC
Legendary Reliability™