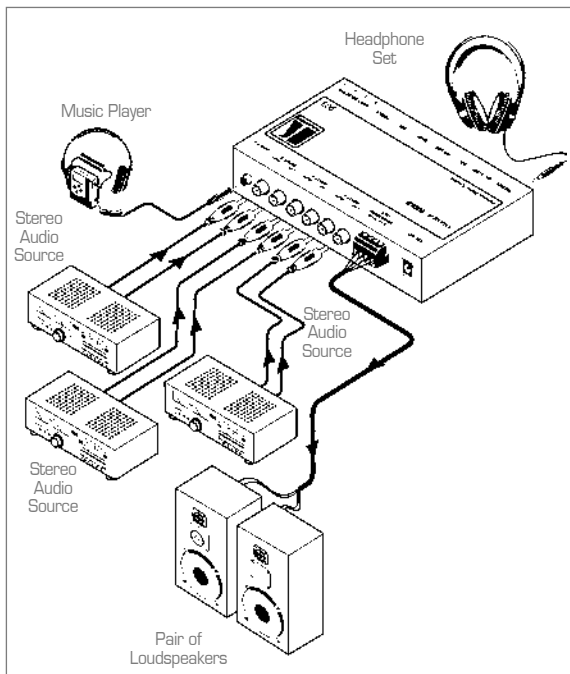


903**2 Channel Personal Stereo Audio Amplifier**

The **903** is a high performance integrated personal stereo amplifier for unbalanced stereo signals. It allows selection between four inputs and delivers a speaker output of 10 watts RMS power per channel into a 4 ohm load.

FEATURES

- **S/N Ratio** - 68dB (unweighted).
- **Highly Efficient** - Class D Operation.
- **Inputs** - 3 stereo on RCA connectors and a single 3.5mm stereo mini-plug.
- **Outputs** - 1/4" Headphone jack and terminal block for speakers.
- **Control** - Volume, bass, mid, treble, balance, and loudness.
- **Compact Size** - Part of the Kramer TOOLS™ family of compact, high quality and cost effective solutions.

**TECHNICAL SPECIFICATIONS**

INPUTS:	1 audio stereo 1Vpp/50kΩ on 3.5mm mini phone connector, 3 audio stereo 1Vpp/50kΩ on RCA connectors.
OUTPUTS:	Stereo headphone on a 6.5mm connector; Loudspeaker on terminal block connector, automatic switching when a headphone is plugged in.
MAX. POWER OUTPUT:	25 Watts peak, or 2 x 10 Watts RMS continuous into 4Ω load.
BANDWIDTH (-3dB):	20kHz.
S/N RATIO:	77dB @ 1kHz.
CROSSTALK:	-73dB @ 1kHz, all hostile.
CONTROLS:	Input selector switches, BASS (70 Hz.), MID (1kHz), TREBLE (15kHz): +/- 13dB. Volume, Balance and Loudness controls.
COUPLING:	AC.
AUDIO THD + NOISE:	0.5%.
AUDIO 2nd HARMONIC:	0.3%.
POWER SOURCE:	12VDC, up to 2.5 Amp.
DIMENSIONS:	19cm x 13.5cm x 2.5cm (7.5" x 5.3" x 0.98", W, D, H).
WEIGHT:	0.6kg. (1.32lbs.) approx.
ACCESSORIES:	12 VDC Power supply.