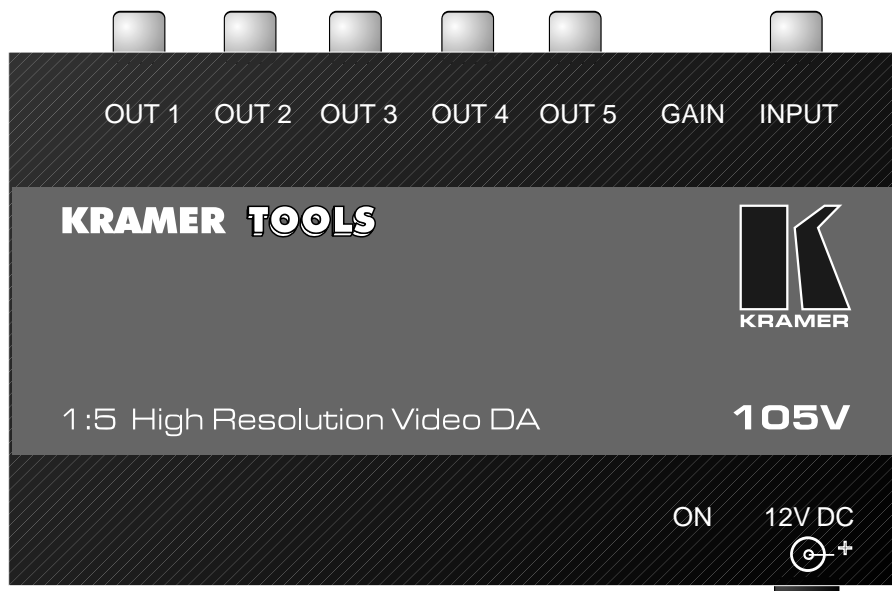


**1:5 Video Distributor****105V**

The KRAMER **105V** is a high quality, state-of-the art *Video Distribution Amplifier* of the KRAMER TOOLS family - designed for studios, shops, showrooms and other demanding applications. The **105V** splits a single input source into five identical outputs. The **105V** use an external 12VDC-power source, and therefore is suitable for field work as well. The machine has a bandwidth exceeding 280 MHz and is therefor suitable for all video applications.

Some features and applications:

- ❖ Video duplication studios, delivering undiminished quality video duplicates.
- ❖ Video showrooms, delivering an identical picture to several monitors.
- ❖ CCTV and security monitors.

**Technical Specifications:**

INPUT:	1 Video, 1Vpp / 75Ω on an RCA connector.
OUTPUTS:	5 Video, 1Vpp / 75Ω on RCAs.
VIDEO BANDWIDTH:	280 MHz -3dB.
COUPLING:	AC.
DIFF. GAIN:	0.1%.
DIFF. PHASE:	0.15 Deg.
S/N RATIO:	-75dB.
K-FACTOR:	<0.05%.
MAX. VIDEO OUTPUT:	2 Vpp.
POWER SOURCE:	12 VDC, 100mA.
DIMENSIONS:	12cm X 7.5cm X 2.5cm (W, D, H.)