## 1:5 Video Distributor


50V

The KRAMER **50V** is a high quality, state-of-the-art *Video Distribution Amplifier* designed for studios, shops, showrooms and other demanding applications. The **50V** splits a single input source into five identical outputs. The **50V** uses an external 12V DC power source, and therefore is suitable for field work as well. Dozens of copies of videotapes can be made at the same time using several **50V** units chained through the looping inputs.

## Some features and applications:

- Video duplication studios, delivering undiminished quality video duplicates.
- Video showrooms, delivering an identical picture to several monitors.
- CCTV and security monitors.



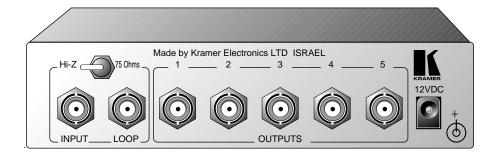

## **Technical Specifications:**

**INPUT:** 1 Video, looping,  $1 \text{Vpp} / 75\Omega$  on BNCs with a termination switch.

**OUTPUTS:** 5 Video,  $1 \text{Vpp} / 75\Omega$  on BNCs.

VIDEO BANDWIDTH: 60 MHz -3dB.

COUPLING: AC.
DIFF. GAIN: 1%.
DIFF. PHASE: 0.3 Deg.
S/N RATIO: -73dB.
K-FACTOR: <0.05%.
MAX. VIDEO OUTPUT: 2 Vpp.

**POWER SOURCE:** 12 VDC, 120mA.

**DIMENSIONS:** 16.5cm X 12cm X 4.5cm (W, D, H.)