

## PT101R


### 1:1 RF Line Amplifier



#### FEATURES

- **High Bandwidth** - 40-3000MHz.
- **Gain** - + 20dB typical across band.
- **Ultra-compact** - Part of the Kramer Pico TOOLS™ family of extremely compact, high quality and cost effective solutions.

The **PT101R** is a high performance RF line amplifier. It takes one RF (CATV/MATV) signal and amplifies it for long cable and remote distribution applications.

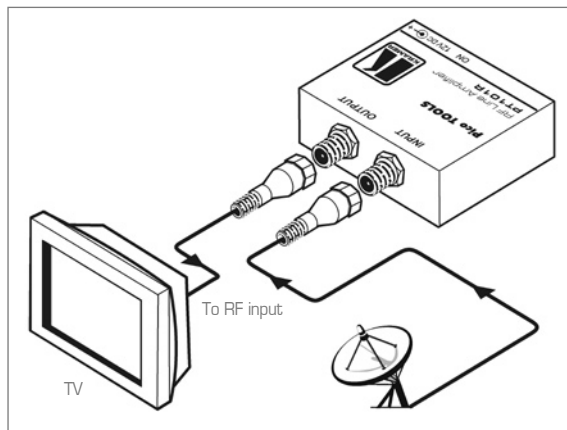

#### TECHNICAL SPECIFICATIONS

INPUT:	1RF/75Ω, on an "F" type connector.
OUTPUT:	1RF/75Ω, on an "F" type connector.
BANDWIDTH (-3dB):	40-3000MHz.
COUPLING:	AC.
RF GAIN:	+ 20dB typical across band.
NOISE FIGURE:	3.5dB.
POWER SOURCE:	12VDC, 78.8mA.
DIMENSIONS:	6cm x 6.5cm x 2.5cm (2.36" x 2.56" 1", W, D, H).
WEIGHT:	0.1kg. (0.22lbs.) approx.
ACCESSORIES:	Power supply, mounting bracket.
OPTIONS:	Model VA-50P power supply with six 12VDC outlets.