


RC-8000

Master Remote Control Panel

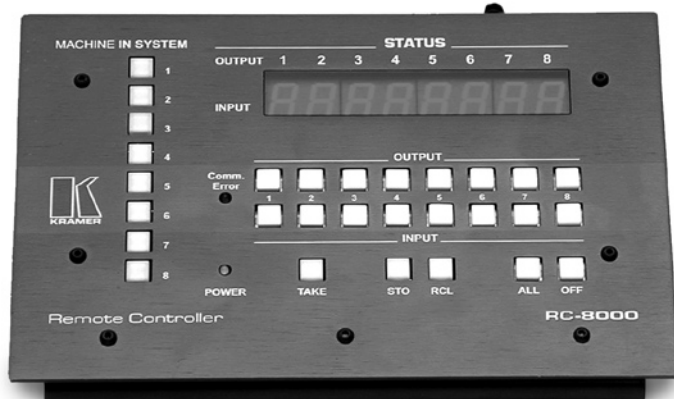

The **RC-8000** is a master remote control unit for the Kramer series 88 matrix switchers (VS-88A, VS-88V, SD-7588A and the VS-7588V). It can control up to 8 switchers and an unlimited number of control panels.

FEATURES

- **Input/Outputs Interface** - RS-485.
- **Memory Locations** - Store multiple switches as presets to be recalled and executed when needed.
- **ALL / OFF Controls** - Sends one input to all outputs, can disconnect all outputs, or turn off individual outputs.
- **Audio Breakaway Switching.**
- **Control** - 8 switchers via front panel push buttons.

TECHNICAL SPECIFICATIONS

| | |
|-----------------|---|
| INPUTS/OUTPUTS: | 1 x RS-485 connector on a detachable terminal block. |
| CONTROL: | 8 illuminated pushbuttons each assigned to a different controlled unit address. 8 out/8 in/5 operational pushbuttons similar to the "88" matrix switcher series. |
| POWER SOURCE: | 12V DC, 200mA. |
| DIMENSIONS: | 21.6cm x 3.8cm x 14cm (8.5" x 1.5" x 5.5", W, D, H). |
| WEIGHT: | 0.4kg. (0.9lbs.) approx. |
| ACCESSORIES: | Power supply, mounting bracket. |

TYPICAL APPLICATIONS

- Video production and duplication studios.
- Live broadcasting and editing.