


VA-10 RGB Cable Delay Corrector

NEW

The **VA-10** corrects skew (delay) errors in long RGB or twisted pair cable runs. Individual R, G, and B skew adjustments correct video delay errors in analog and twisted pair applications which are seen as mis-convergence on the display.

FEATURES

- **Input/Output** - HD-15 Connectors.
- **Control** - R, G, & B delay (skew) adjustments.
- **Compact Size** - Part of the Kramer TOOLS™ family of compact, high quality and cost effective solutions.

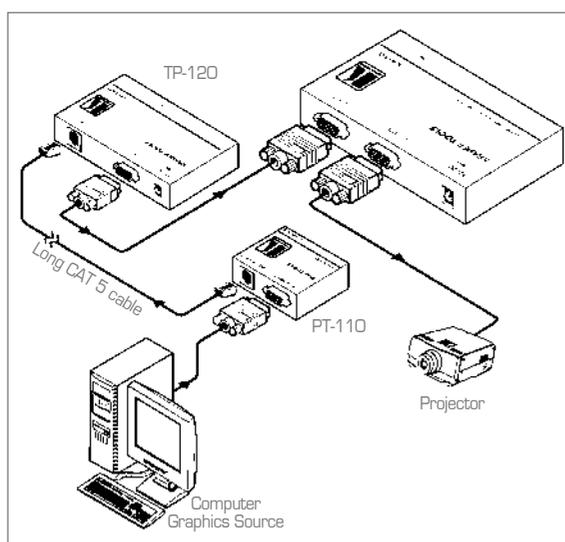

TECHNICAL SPECIFICATIONS

INPUT:	1 analog red, green, blue input signals - 0.7Vpp/75Ω, H & V sync, TTL level, on an HD15F connector
OUTPUT:	1 analog red, green, blue output signals - 0.7Vpp/75Ω, H & V sync, TTL level, on an HD15F connector
MAX. OUTPUT LEVEL:	1Vpp.
BANDWIDTH (-3dB):	Up to UXGA
DIFF. GAIN:	0.8%.
DIFF. PHASE:	0.7%.
K-FACTOR:	0.4%.
S/N RATIO:	71dB.
CONTROLS:	Delay control via 3 (RGB) trimmers, 0 to 62ns.
COUPLING:	AC IN and OUT
POWER SOURCE:	12VDC, 150mA
DIMENSIONS:	12 cm x 7.5 cm x 2.5 cm (4.7" x 2.95" x 0.98", W, D, H).
WEIGHT:	0.3 kg. (0.67 lbs.) approx.
ACCESSORIES:	Power supply, mounting bracket
OPTIONS:	19" rack adapters RK-T1, and/or RK-T3.

