VA-11

Composite Video & Unbalanced Stereo Audio Combiner










The VA-11 is a high performance combiner of composite video and unbalanced stereo audio signals. It combines the composite video and stereo audio into a single signal which allows the use of a single coax cable, which can then separates it back into composite video and stereo audio when used with the VA-12 separator.

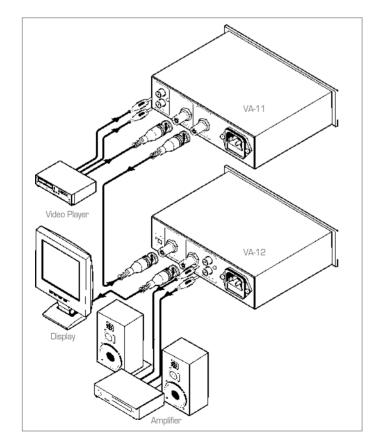

FEATURES

- Bandwidth 7MHz (- 3dB).
- Inputs 1 composite video and 1 unbalanced stereo audio
- Outputs 1 single signal of the combined audio and composite video.
- Desktop Size Compact size. Two units can be rack mounted side-by-side in a 1U rack space with the optional RK-5ORN.

TECHNICAL SPECIFICATIONS

INPUTS: 1 composite video, $1Vpp/75\Omega$ on a BNC type

connector. 1 stereo audio, $1Vpp/10k\Omega$

on RCA connectors. OUTPUT:

1 mixed signal 1Vpp/75 Ω on

a BNC connector.

BANDWIDTH (- 3dB): 7MHz. 0.4%. 0.17 Deg. DIFF. GAIN: DIFF. PHASE: VIDEO S/N RATIO: 72dB.

230VAC, 50/60Hz POWER SOURCE:

(115VAC, U.S.A.) 4.1VA. 16.5cm x 12cm x 4.5cm (6.5" x 4.7" x 1.8", W, D, H). DIMENSIONS: 0.78kg. (1.7lbs.) approx.

WEIGHT: ACCESSORIES: Power cord.

OPTIONS: RK-50RN 19" rack adapter.

