VM-50YC

1:5 s-Video Distribution Amplifier






622099 OUTPUTS LOOP 12VDC

The Kramer VM-50YC is a high performance distribution amplifier for s-Video (Y/C) signals. It takes one input, provides correct buffering and isolation, and distributes the signal to 5 identical outputs.

FEATURES

- Bandwidth (Y) 285MHz (- 3dB).
- Looping Input.
- Selectable Input Signal Termination.
- Desktop Size Compact size. Two units can be rack mounted side-by-side in a 1U rack space with the optional RK-5ORN adapter.

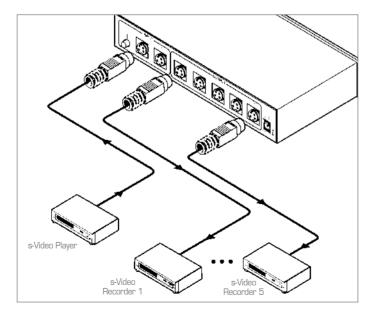

TECHNICAL SPECIFICATIONS

OUTPUTS:

WEIGHT:

1 s-Video, looping, 1Vpp/75 Ω (Y), 0.3 Vpp/75 Ω (C), on 4p connectors INPUTS:

with a termination switch. 5 s-Video, looping,

 $1Vpp/75\Omega(Y)$ 0.3 Vpp/75Ω (C), on 4P

connectors. 2Vpp (Y).

MAX. VIDEO OUTPUT: s-VIDEO BANDWIDTH (- 3dB): 285MHz (Y). DIFF. GAIN: 0.05% DIFF. PHASE: 0.05 Deg. K-FACTOR: < 0.05% S/N RATIO: 80dB

 75Ω termination switch. CONTROL:

COUPLING: AC. POWER SOURCE:

12VDC, 50mA. DIMENSIONS:

16.5cm x 12cm x 4.5cm (6.5" x 4.7" x 2.8", W, D, H). 0.58kg. (1.3lbs.) approx. ACCESSORIES: 12VDC power supply, brackets for stacking

multiple units.

OPTIONS: 19" rack adapter RK-50RN.

