


VS-101AV 10x1 Composite Video & Stereo Audio Switcher



The **VS-101AV** is a high performance switcher for composite video and unbalanced audio signals. It switches any one of 10 composite video and unbalanced stereo audio signals to a single composite output.

FEATURES

- **High Bandwidth** - 500MHz (-3dB).
- **Mechanical (Passive) Switching** - No power required.
- **Standard 19" Rack Mount Size** - 1U.

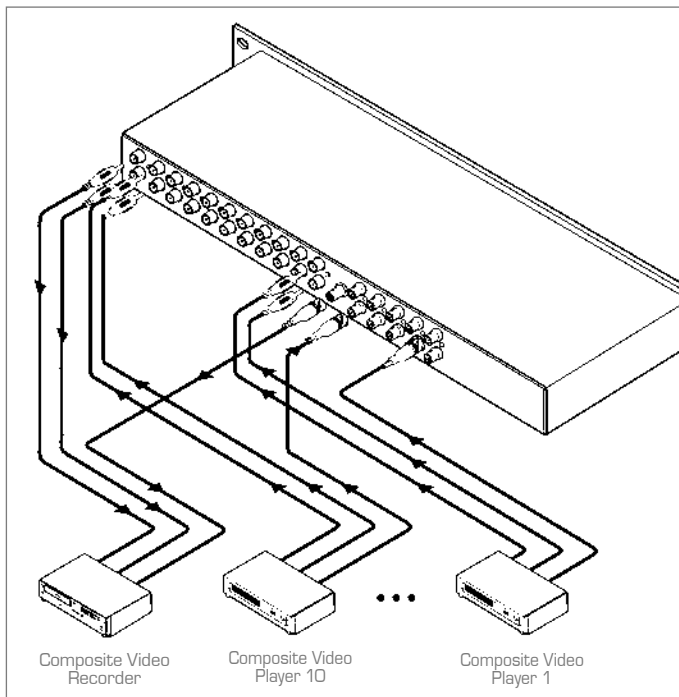

TECHNICAL SPECIFICATIONS

INPUTS:	10 video, 1Vpp/75Ω on BNC connectors; 10 audio stereo, +4dBm typical, on RCA connectors.
OUTPUTS:	1 video, 1Vpp/75Ω on a BNC connector; 1 audio stereo, +4dBm typical, on RCA connectors.
SWITCHING SYSTEM:	Mechanical, "Break-before-make", Audio-Follow-Video mode.
BANDWIDTH (-3dB):	500MHz (video), 100kHz (audio).
CROSSPOINTS:	10 for video, 10 x 2 for audio, 1 set active at any given time.
MAX SIGNAL LEVELS:	3Vpp video, +30dBm audio.
DIMENSIONS (W, D, H):	48.3cm x 10.2cm x 4.4cm, (19" x 4" x 1U).
WEIGHT:	1.5kg. (3.3lbs.) approx.

