

VS-41AV


4x1 Composite Video & Stereo Audio Switcher



The **VS-41AV** is a high performance switcher for composite video and unbalanced stereo audio signals. It switches any one of four signals to a single output.

FEATURES

- **High Bandwidth** - 520MHz (-3dB).
- **Mechanical (Passive) Switching** - No power required.
- **Desktop Size** - Compact size. Two units can be rack mounted side-by-side in a 1U rack space with the optional RK-81 adapter.

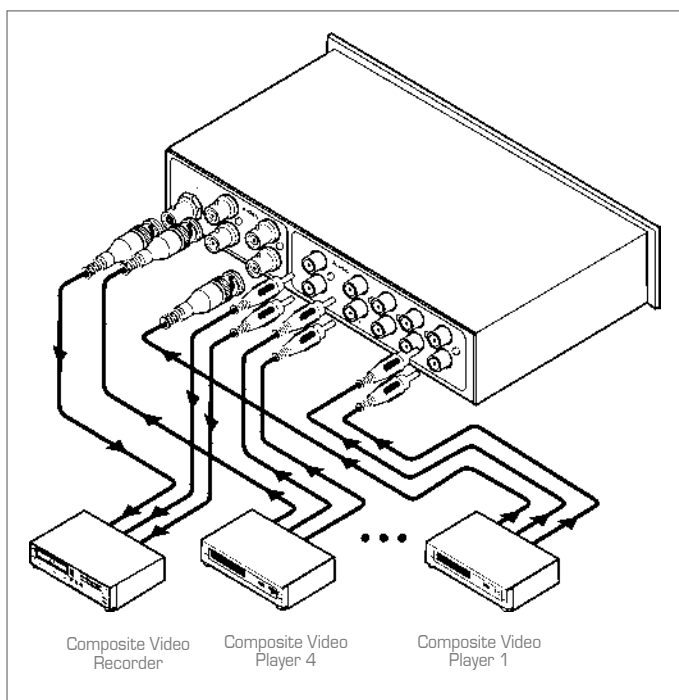

TECHNICAL SPECIFICATIONS

INPUTS:	4 video, 1Vpp/75Ω on BNC connectors. 4 audio stereo, +4dBm typical, on RCA connectors.
OUTPUTS:	1 video, 1Vpp/75Ω on a BNC connector. 1 audio stereo, +4dBm typical, on RCA connectors.
SWITCHING SYSTEM:	Mechanical, "Break - before - make", audio - follow - video mode.
BANDWIDTH (-3dB):	520MHz (video), 100kHz (audio).
CROSSPOINTS:	4 for video, 4 x 2 for audio, 1 set active at any given time.
MAX SIGNAL LEVELS:	3Vpp video, +30dBm audio.
DIMENSIONS (W, D, H):	18.8cm x 10.2cm x 4.4cm, (7.4" x 4" x 1.7").
WEIGHT:	0.65kg. (1.44lbs.) approx.
OPTIONS:	19" Rack adapter RK-81.

