# 32" Philips ProPlus Television

with SmartCard Expansion Slot

(screen size measured diagonally)

- SmartCard Integrated Expansion Capability
- Smart Plug™ Two-Way Addressable Port
- · Front Audio/Video Jacks
- · Security Mountable
- External Speaker Connections
- Front Control Lockout
- ESP<sup>™</sup> (Energy Saving Programmability)
- Volume Management
- Marquee Channel™
- · Audio/Video Muting
- SmartMute<sup>™</sup>
- Local Preview<sup>™</sup>- Channel Guide
- Programmable Channel Blanking
- SmartSound™
- V-Chip Compliant

#### **ProPlus Performance Package**

- Stereo-dbx<sup>™</sup> Sound
- Digital Comb Filter
- Event Programming (7 day / 7 event)

RC2524BK Universal Remote


- 24 Hour Clock
- Easy A/V Switching
- 29-Button Universal Remote




### **PPC SERIES**





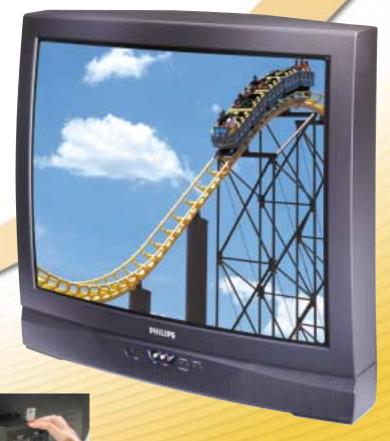





Setting Industry Standards™





## 32" ProPlus SmartCard Television™

The PPC132C is a full-featured SmartCard Television™ designed for upgradability. The SmartCard interface provides simple plug-and-play insertion of SmartCards and allows third party integrators to utilize two-way interactivity for specialized applications.

### **Technical Specifications:**

- System: 525 lines per picture, 60 fields per second, interlaced for NTSC 3.58 systems
- Power Source: 90-150Vac, 50/60Hz
- Power Consumption: 100W (avg.)
- Standby Power Consumption (Energy Star): 0.5W
- Picture Tube: 32" Diagonal, 110°
- Speaker Size: Two 2" x 5" oval speakers
- Resolution: RF 440+, CVBS 680+, S-Video 680+, RGB 700+ TV lines (per picture width - horizontal)
- · Digital Comb Filter
- Operating Temperature: 32°F 104°F (0°C 40°C)
- Operating Humidity: 5% 100%
- Weight: 120 lbs.
- Dimensions (WxHxD): 30 1/2" x 26 5/8" x 21 3/4"
- Power Cord: 13', 3 Prong Polarized
- Closed Captioning: Compatible with all FCC recognized modes
- Channel Capability: 181 channels
- Stereo-dbx<sup>™</sup> Noise Reduction Hi-Fi Sound System
- Audio: 2 x 3 Watts @ 16Ω, @ 10% THD, 50Hz 12kHz frequency response

#### Input/Output Capabilities:

- Antenna Input: 75Ω VHF/UHF
- SmartCard Interface: 32-Pin Molex™
- Speaker R & L click fit
- Audio Output (Fixed or Variable): 2 outputs (L/R), phono type connector
- Video Input (front): 1 inut, phono type cpnnector
- Audio Input (front): 2 inputs (L/R), phono type connector
- Smart Plug™ Two-Way Addressable Interface Port: RJII type connector

#### Accessories: (optional)

- Setup Transmitter (RG4172BK) use to customize TV to application Mounting Brackets Various types available
- Future Upgrade Cards As technology advances, the TV is upgradeable to meet future applications.
- Smart Loader for cloning (CLON99BK)

#### Special Features:

#### SmartCard™ Integrated Expansion Capability

Allows expandability for future upgrades.

#### Smart Plug™ Two-Way Addressable Port

Allows for two-way communication between the set and a remote source. Compatible with all major premium entertainment services and third-party control systems, Smart Plug eliminates confusing set-top boxes and makes it easy for guests to use interactive guest services.

#### Front Control Lockout

Provides the ability to selectively or completely disable front control panel buttons.

#### ESP™ (Energy Saving Programmability)

Energy saving system that powers television off after a specified period of use. A simple countdown clock can be selectively set to operate from 0-99 hours with automatic clock reset at each power-up.

#### Security Mountable

Equipped with heavy-duty mounting blocks on the bottom of the cabinet, designed for safe and secure mounting to security brackets.

#### Volume Management

Programmable minimum/maximum and turn-on volume range. Forces the monitor/ receiver to operate within a user-defined volume range, preventing volume adjustments that are too high or too low.

SmartCard Television, Marquee Channel, ESP, SmartSound, SmartMute, and Smart Plug are trademarks of Phillips Consumer Electronics Co. Other product and company names mentioned herein may be the trademarks of their respective owners.

LIPC: 037849912058



#### Marquee Channel™

Forces specified channel when television is turned on.

#### Audio/Video Muting

Automatically detects loss of signal and optionally mutes both audio and video.

Automatically displays closed caption service whenever the user activates the mute function.

#### Local Preview™ - Channel Guide

Automatically displays channel guide, an onscreen directory of channels and network affiliates, every time television is turned on. After choosing the channel to view, channel guide fades off screen to be displayed again when called up using the remote.

#### SmartSound™

Automatically detects variations in audio and adjusts to acceptable levels.

#### ProPlus Performance Package


These high performance features found only on the Philips PA/PPC products ensure the highest picture and sound quality while providing additional functionality for the most demanding professional applications.


- · Easy A/V Switching: Provides immediate access to A/V inputs via the TV's front panel or remote control.
- Event Programming (7 day / 7 event): Built-in software provides scheduling capability by time and day of week. Unit can be programmed to power-up, tune to a specified channel, and power-down automatically.
- Digital Comb Filter: Digital circuitry clearly separates black and white detail from color data virtually eliminating dot crawl and delivering razorsharp picture performance and increased resolution.
- Stereo dbx™ Sound
- Switch Control of Internal/External Speakers
- 24-Hour Clock
- 29-Button Universal Remote


#### **Optional Cards**

- MonCard
- Net1Card
- ProKit1

- · ScanCard III w/Net1
- Net3Card











©2001 Philips Consumer Electronics Company A Division of Philips Electronics North America Corporation Produced by Ballerini Marketing

#### PHILIPS ITV WEBSITE: http://www.philipsitv.com

Specifications subject to change without notice





