ViewSonic® NextVision® HD12 HDTV Tuner

PLUG AND PLAY HIGH-DEFINITION TV RECEIVER

Bring HDTV and digital sound to your HD-ready TV.

Simply plug the NextVision HD12 in to your HD-ready TV and you'll be receiving over-the-air digital HDTV programming in no time. In addition, the HD12 provides clear reception for standard definition (NTSC) and enhanced definition TV signals. Take advantage of the ability to receive **CLEAR, CRISP HIGH-DEFINITION (ATSC) TV SIGNALS** on local broadcast stations without additional subscription fees. Get CD-quality sound right through your home entertainment system with the **DOLBY DIGITAL AND MPEG** audio decoding. Add the NextVision HD12 to your HD-ready TV for true HDTV with no strings attached.

The HD12 makes any HD-ready TV a true high-definition TV.

Receive no-fee, over-the-air HDTV programming

⋯⟩**Easily turns your HDTV-ready TV or monitor into a true HDTV.***

Provides clear reception of high-definition, enhanced and standard definition TV signals available on local broadcast stations.

⋯⟩**Bring high-quality Dolby digital sound to your home theater.**

With either coaxial or optical SPDIF you can easily connect digital audio to your surround sound home system.

⋯⟩**Receive both HDTV (ATSC) and standard TV (NTSC) over-the-air broadcasts.**

Compatible with all 18 ATSC signal formats as well as standard definition VHF and UHF TV signals.

⋯⟩**Enjoy superior picture quality with digital or analog video output.**

Compatible with any display that features DVI (HDCP), component, composite, S-video or VGA (RGB) inputs.

⋯⟩**Picture-in-picture capability.**

See what you've been missing. Use the PIP capability to watch your favorite news station without changing the station from that award-winning movie.

⋯⟩**Supports digital and standard TV output formats.**

Displays content in both 4:3 and 16:9 aspect ratios. The HD12 supports all TV scanning formats including 480i, 480p, 720p, and 1080i.
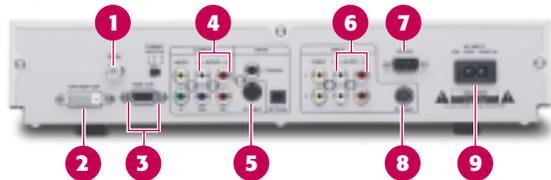
HDTV

ViewSonic®

ViewSonic® NextVision® HD12 HDTV Tuner

PLUG AND PLAY HIGH-DEFINITION TV RECEIVER

1. *Power*
2. *Menu select*

1. *RF in*
2. *DVI HDCP out*
3. *RGB out*
4. *Video/audio out*
5. *S-video out*
6. *Video/audio in*
7. *RS-232 (service)*
8. *S-video in*
9. *AC input*

NEXTVISION HD12 TV TUNER

VIDEO	**Aspect Ratio**	4:3, 16:9
	Resolution	720x480i, 720x480p, 1280x720p, 1920x1080i
	Output Connectors	Composite – RCA jack; component YPbPr – 3 RCA jacks, S-video, 4-DIN, DVI-D, RGB-HDCP
	Input Connector	RCA for upconversion, composite x2, S-video
AUDIO	**Output Connectors**	Analog – RCA, Digital – coaxial, optical
CONTROLS	**Physical**	Power (front panel adjustment)
	OSD	Channel (edit, auto, manual scan, quick scan), system (password, video setup, audio setup), caption (size, style, color), set up (format, sound, opacity), lock (rating, password)
	RCU	36-key IR remote control, standby, volume +/-, channel+/-, navigation arrows (4), enter, menu, exit, favorites, EPG, V-format, input, PIP, A. ratio, audio, info, CCS, mute, freeze and 10 numbered keys
POWER	**Type**	Universal
	Input	90–264Vac, 47–63Hz
	Output	12/5 VDC, 2.0 A
	Consumption	34 W typ
OPERATING CONDITIONS	**Temperature**	32–104° F (5–40° C)
	Humidity	5–95% (non-condensing)
DIMENSIONS (W X H X D)		280mm x 78mm x 360mm 11.2" x 3.1" x 14.4"
WEIGHT	**Net**	2.6 kg (5.7 lb.)
	Gross	3.6 kg, (7.9 lb.)

ISO 9001:2000
FM 40187

ISO 14001:1996
FM 40968

ViewSonic Corporation's QMS & EMS have been registered to
ISO 9001 & ISO 14001, respectively, by the British Standards Institution.

Connect the HD12 TV tuner to an HD-ready LCD TV, like ViewSonic's N2700w, to enjoy crystal-clear, high-definition TV without additional subscriber fees.*

For more product information, visit us on the web at ViewSonic.com

specifications