



N/D967

N/DYM® Dynamic Supercardioid Concert Vocal Microphone



Howlin' Andy Hound Photo by Chris Brindley



Dear Sound Engineer,

QUESTION: What do you want out of a live vocal microphone?

ANSWER: The vocals...nothing else.

QUESTION: What don't you want out of a live vocal microphone?

ANSWER: Monitors, cymbals, stage vibration, rumble...

QUESTION: What live vocal microphone gives you more of what you want?

ANSWER: The Electro-Voice® N/D967

Live sound engineers deal with it every day: loud stages and high SPL environments. In a world where performers demand loud side-fill, even louder monitors, and where dialing in a good vocal sound is difficult – the Electro-Voice® N/D967 is the live sound engineer's favorite. The N/D967's flat ball screen puts the performer's voice as close as possible to the microphone element. Simply, this means more vocal into the mic. Combine this with an extraordinarily tight pick-up pattern, specially tailored frequency response, and the result is the highest gain-before-feedback of any mic in the industry. And for those performances requiring more "cut", an exclusive "personality switch" is provided, allowing the engineer to tailor the mic's response to the performer's voice.

The N/D967 – More Vocals, Less of Everything Else

N/D967

Supercardioid Concert Vocal Microphone





Technical Specifications

Frequency Response, Close:	50 Hz – 13,000 Hz
Frequency Response, Far:	120 Hz – 13,000 Hz
Polar Pattern:	Supercardioid
Sensitivity, Open Circuit Voltage @ 1 kHz:	4.0 mV/pascal
Dynamic Range:	142 dB
Equivalent Output Noise:	16 dB A weighted (0 dB=0.00002 pascal)
Polarity:	Positive pressure on diaphragm causes positive voltage on pin 2 ref. pin 3
Impedance:	600 ohms balanced (low-z)
Accessories Included:	<ul style="list-style-type: none">• Mic Stand Adapter• Soft Zippered "Gig" Bag
Dimensions	
Length:	6.80" (173 mm)
Diameter:	2.05" (52 mm)
Shank:	0.80" (20 mm)
Net Weight:	9.2 oz (260 g)
Shipping Weight:	19.0 oz (655 g)

Key Features:

- Highest gain-before-feedback performance vocal microphone
- Optimized response for live performance
- EV-exclusive personality switch shapes sound
- High N/DYM[®] sensitivity
- Unique removable front grille assembly and pop filter for easy hygenic cleaning
- Superior multistage shock mount for unmatched low handling noise
- Warm Grip[™] handle for more comfortable feel

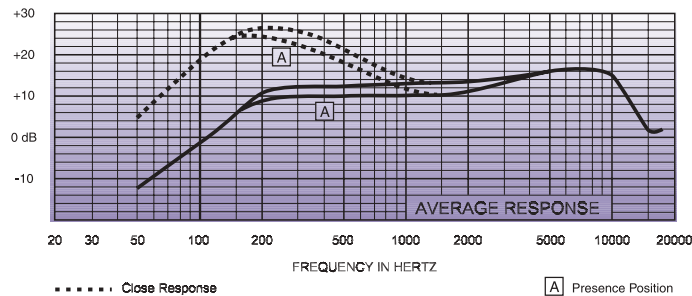

For information call 1-800-667-3968
www.electrovoice.com



12000 Portland Avenue South
Burnsville, MN 55337

© 2003 Telex Communications, Inc.