


North American Power Conditioners - "A" Case Enclosure

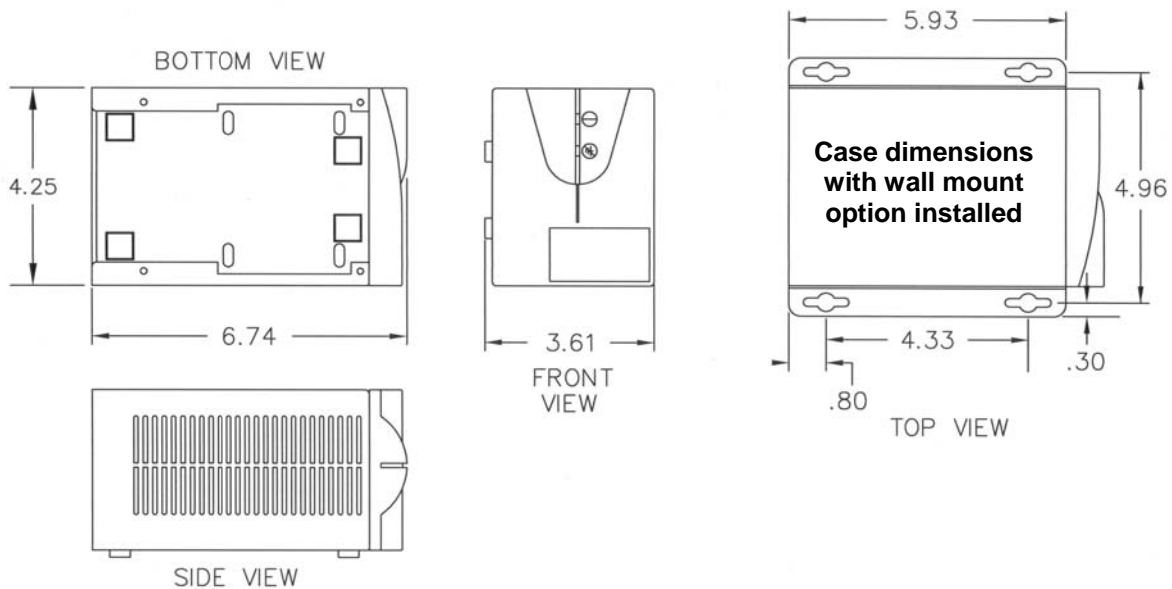

| | PCI-065NA* Part # E61008-XX | PCI-100NA* Part # E61012-XX |
|-----------------------------------|--------------------------------|--------------------------------|
| VA Rating | 78 | 120 |
| Frequency | 60 Hz. | 60 Hz. |
| BTU/Hr. Output | 27 | 41 |
| T.H.D. % Added | <1% | <1% |
| Load Surge Current @ | | |
| 1/2 cycle | 10 amps | 15 amps |
| 1 second | 3.6 amps | 5.2 amps |
| 10 seconds | 2.0 amps | 3.0 amps |
| Input Voltage | 120 | 120 |
| Output Voltage | 120 | 120 |
| Output Current | .65 amps | 1.0 amps |
| Efficiency | 90% | 90% |
| Voltage Drop No Load to Full Load | 10% | 10% |
| Wall mountable* | Yes | Yes |
| Safety Agency Listing | UL and cUL | UL and cUL |
| Shipping Weight (lbs.) | 5 | 6 |

* When ordering by model number, add "W" to model number above for wall mount option.

NOISE REJECTION-ISOLATION: With unit under power and an ANSI/IEEE C62.41 Cat. A pulse applied either normal or common mode at the input, the noise output voltage will be less than 10V normal mode and less than 0.5V common mode in all four quadrants (CM-NM, NM-NM, CM-CM, NM-CM).

SURGE VOLTAGE WITHSTAND CAPABILITY: Tested under power to ANSI/IEEE C62.41 Cat. A & B (formerly IEEE587-1980). Cat. A - 6000V @ 200 amps, 0.5 usec risetime, 100 kHz decay, Cat. B - 6000V @ 500 amps, 0.5 usec risetime, 100 kHz decay.


North American Standard Conditioners - "A" Case Enclosure Available Plug/Receptacle Options

ETA Systems Part #
PCI-065NA - E61008-XX**
PCI-100NA - E61012-XX**

When ordering by part number, add two digit number from below in place of **XX to specify receptacle option desired.


Option 1 - Standard Plugs/Receptacles

- 01 - 5-15P plug and one 5-15R duplex
- 21 - 5-15P plug and one 5-15R duplex with wallmount



Option 2 - Twistlock Plugs/Receptacles

- 41 - L5-15P plug and one L5-15R duplex



Warranty/Support: ETA Systems warrants its power conditioners against defects in materials and workmanship for a period of five years from the date of shipment. For service or support on any ETA Systems product, please contact ETA Technical Support at (800) 321-6699.