

105S


1:5 s-Video Distribution Amplifier



The Kramer **105S** is a high performance s-Video (Y/C) distribution amplifier. It takes one input, provides correct buffering and isolation, and distributes the signal to five identical outputs.

FEATURES

- **Bandwidth (Y)** - 230MHz (-3dB).
- **Compact Size** - Part of the Kramer TOOLS™ family of compact, high quality and cost effective solutions.

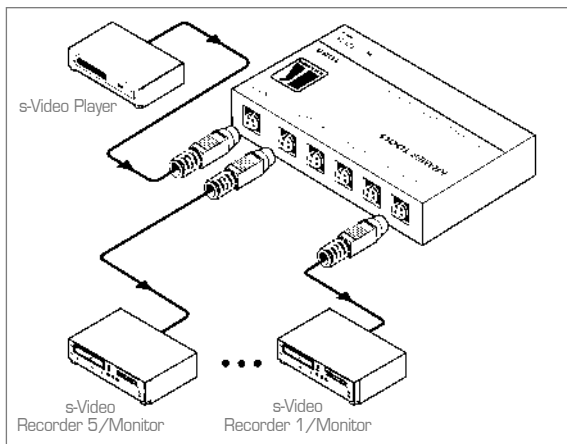

TECHNICAL SPECIFICATIONS

INPUT:	1 s-Video, 1Vpp/75Ω (Y), 0.3Vpp/75Ω (C), on a 4p connector.
OUTPUTS:	5 s-Video, 1Vpp/75Ω (Y), 0.3Vpp/75Ω (C), on 4p connectors.
MAX. VIDEO OUTPUT:	2Vpp (Y).
VIDEO BANDWIDTH (-3dB):	230MHz (Y).
DIFF. GAIN:	0.08%.
DIFF. PHASE:	0.12 Deg.
K-FACTOR:	< 0.05%.
S/N RATIO:	72dB.
COUPLING:	AC.
POWER SOURCE:	12VDC, 100mA.
DIMENSIONS:	12cm x 7.5cm x 2.5cm (4.7" x 2.95" x 0.98", W, D, H).
WEIGHT:	0.28kg. (0.62lbs.) approx.
ACCESSORIES:	Power supply, mounting bracket.
OPTIONS:	VA-50P power supply with six 12VDC outlets. RK-T1, RK-T3 rack adapters.

