


VS-4YC

4x4 s-Video & Stereo Audio Switcher



The **VS-4YC** is a high performance single crosspoint switcher for s-Video (Y/C) and unbalanced audio signals. It independently switches any one of four audio or s-Video (Y/C) signals to a single audio or video output.

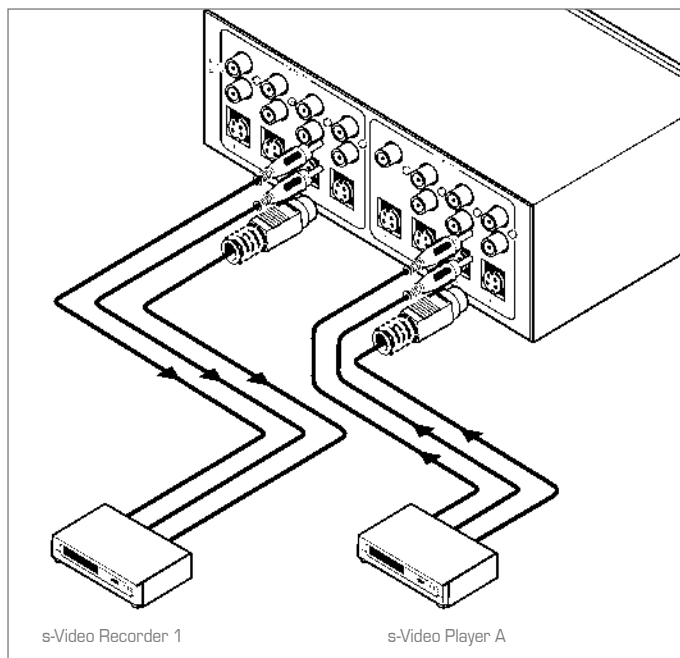

FEATURES

- **Bandwidth (Y)** - 280MHz (-3dB).
- **Mechanical (Passive) Switching** - No power required.
- **Separate Audio & s-Video Switching** - 1 crosspoint (each).
- **Desktop Size** - Compact size. Two units can be rack mounted side-by-side in a 2U rack space with the optional RK-4E/S adapter.

TECHNICAL SPECIFICATIONS

INPUTS:	4 s-Video, 1Vpp/75Ω (Y), 0.3Vpp/75Ω (C) on 4p type connectors. 4 audio stereo, +4dBm on RCA connectors.
OUTPUTS:	4 s-Video, 1Vpp/75Ω (Y), 0.3Vpp/75Ω (C) on 4p type connectors. 4 audio stereo, +4dBm on RCA connectors.
BANDWIDTH (-3dB):	280MHz (Y) (video), 100kHz (audio).
SWITCHING SYSTEM:	Mechanical, Break-before-make.
CROSSTALK:	-42dB Chrominance, -60dB Sync.
MAX SIGNAL LEVELS:	Video: 3Vpp; Audio: +30dBm.
DIMENSIONS:	18.8cm x 7cm x 7cm (7.4" x 2.7" x 2.7", W, D, H).
WEIGHT:	0.6kg. (1.3lbs.) approx.
OPTIONS:	19" Rack adapter RK-4E/S.

